


## PT 1,5/ 7-3,5-V

Order No.: 1984811

The figure shows a 10-position version of the product

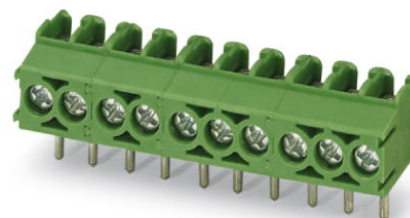

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1984811>

PCB terminal block, nominal current: 17.5 A, rated voltage: 160 V,  
pitch: 3.5 mm, number of positions: 7, mounting type: Soldering,  
connection method: Screw connection, connection direction from the  
conductor to the PCB: 90°

### Commercial data

|                          |                    |
|--------------------------|--------------------|
| EAN                      | 4017918946364      |
| Pack                     | 100 Pcs.           |
| Customs tariff           | 85369010           |
| Weight/Piece             | 0.00367 KG         |
| Catalog page information | Page 415 (CC-2007) |

### Product notes

WEEE/RoHS-compliant since:  
01/01/2003



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### Dimensions / positions

|        |        |
|--------|--------|
| Length | 9 mm   |
| Height | 7.6 mm |
| Pitch  | 3.5 mm |

|                        |         |
|------------------------|---------|
| Dimension a            | 21 mm   |
| Number of positions    | 7       |
| Pin dimensions         | 0,9 mm  |
| Pin spacing            | 3.5 mm  |
| Hole diameter          | 1.2 mm  |
| Screw thread           | M 2     |
| Tightening torque, min | 0.25 Nm |

#### Technical data

|                                    |                     |
|------------------------------------|---------------------|
| Insulating material group          | I                   |
| Rated surge voltage (III/3)        | 2.5 kV              |
| Rated surge voltage (III/2)        | 2.5 kV              |
| Rated surge voltage (II/2)         | 2.5 kV              |
| Rated voltage (III/2)              | 200 V               |
| Rated voltage (II/2)               | 400 V               |
| Connection in acc. with standard   | EN-VDE              |
| Nominal current $I_N$              | 17.5 A              |
| Nominal voltage $U_N$              | 160 V               |
| Nominal cross section              | 1.5 mm <sup>2</sup> |
| Maximum load current               | 17.5 A              |
| Insulating material                | PA                  |
| Inflammability class acc. to UL 94 | V0                  |
| Stripping length                   | 5 mm                |

#### Connection data

|                                                                         |                      |
|-------------------------------------------------------------------------|----------------------|
| Conductor cross section solid min.                                      | 0.2 mm <sup>2</sup>  |
| Conductor cross section solid max.                                      | 1.5 mm <sup>2</sup>  |
| Conductor cross section stranded min.                                   | 0.2 mm <sup>2</sup>  |
| Conductor cross section stranded max.                                   | 1.5 mm <sup>2</sup>  |
| Conductor cross section stranded, with ferrule with plastic sleeve min. | 0.25 mm <sup>2</sup> |
| Conductor cross section stranded, with ferrule with plastic sleeve max. | 0.75 mm <sup>2</sup> |
| Conductor cross section AWG/kcmil min.                                  | 26                   |
| Conductor cross section AWG/kcmil max                                   | 16                   |
| 2 conductors with same cross section, solid min.                        | 0.2 mm <sup>2</sup>  |

|                                                     |                      |
|-----------------------------------------------------|----------------------|
| 2 conductors with same cross section, solid max.    | 0.34 mm <sup>2</sup> |
| 2 conductors with same cross section, stranded min. | 0.2 mm <sup>2</sup>  |
| 2 conductors with same cross section, stranded max. | 0.5 mm <sup>2</sup>  |

#### Certificates / Approvals



#### CUL

|                                |       |
|--------------------------------|-------|
| Nominal voltage U <sub>N</sub> | 300 V |
| Nominal current I <sub>N</sub> | 10 A  |
| AWG/kcmil                      | 26-16 |

#### UL

|                                |                   |
|--------------------------------|-------------------|
| Nominal voltage U <sub>N</sub> | 300 V             |
| Nominal current I <sub>N</sub> | 10 A              |
| AWG/kcmil                      | 26-16             |
| Certification                  | CCA, CUL, SEV, UL |

#### Accessories


| Item           | Designation             | Description                                                                                                                                                                               |
|----------------|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Marking</b> |                         |                                                                                                                                                                                           |
| 1051993        | B-STIFT                 | Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm                                                                               |
| 0804073        | SK 3,5/2,8:FORTL.ZAHLEN | Marker card, printed horizontally, self-adhesive, 10-section marker strip, 14 identical decades marked 1-10, 11-20 etc. up to 91-100, sufficient for 140 terminal blocks                  |
| 0805030        | SK 3,5/2,8:SO           | Marker card, special printing, self-adhesive, labeled acc. to customer requirements, 14 identical marker strips per card, max. 25-position labeling per strip, color: White               |
| 0803883        | SK U/2,8 WH:UNBEDRUCKT  | Unprinted marker cards, DIN A4 format, pitch as desired, self-adhesive, with 50 stamped marker strips, 185 mm strip length, can be labeled with the CMS system or manually with the M-PEN |
| 0811228        | X-PEN 0,35              | Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm                                                                   |

## Tools


|         |             |                                                                                                                                |
|---------|-------------|--------------------------------------------------------------------------------------------------------------------------------|
| 1205037 | SZS 0,4X2,5 | Screwdriver, bladed, matches all screw terminal blocks up to 1.5 mm <sup>2</sup> connection cross section, blade: 0.4 x 2.5 mm |
|---------|-------------|--------------------------------------------------------------------------------------------------------------------------------|

## Drawings

### Drilling diagram

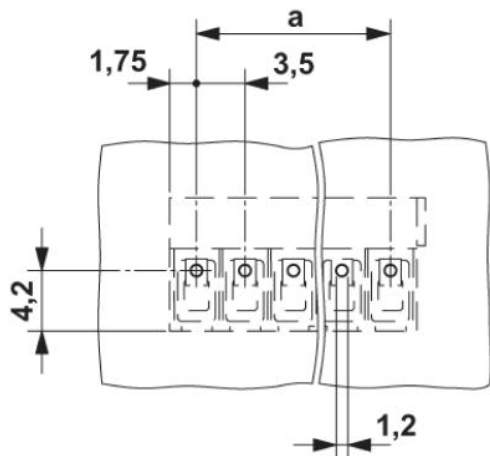

### Dimensioned drawing

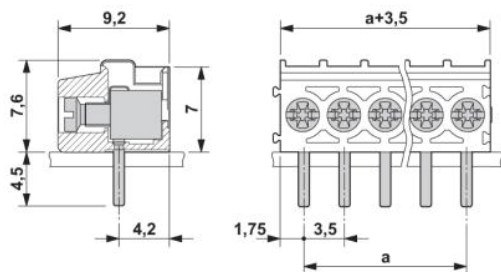

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2008 Phoenix Contact  
Technical modifications reserved;