


1KAB-E SERIES

1.2 amp rectifier bridge

Maximum Ratings

		1KAB-E	Units
I_O		1.2	A
I_{FSM}	50 Hz	50	A
	60 Hz	52	
i^2t	50 Hz	17.7	A^2s
	60 Hz	16.1	
V_{RRM}		100-1,000	V





Single Phase Bridge Rectifier

Description/Features

A 1.2A Diode Bridge Rectifier Assembly designed for new circuits and for replacement service. For printed circuit board applications.

- Ease of assembly, installation, inventory
- High surge rating
- Compact

CASE STYLE AND DIMENSIONS

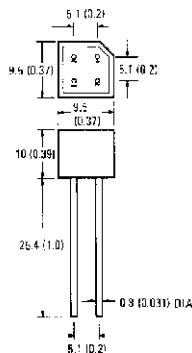

Case Style D-38

All Dimensions in Millimeters and (Inches)

VOLTAGE RATINGS

Type	V_{RRM}, V_{RSM} (V)	V_{RMS} (recommended) (V)	Maximum ① Load Capacitance (μ F)	Minimum ② Source Resistance (Ω)
1KAB10E	100	40	5000	0.5
1KAB20E	200	80	3300	0.8
1KAB40E	400	125	1800	1.5
1KAB80E	800	250	1200	2.6
1KAB90E	800	380	800	3.0
1KAB100E	1000	500	600	5.0

① See Figure 3

CROSS REFERENCE

IR No.	DIN Code
1KAB10E	B40C1000
1KAB20E	B80C1000
1KAB40E	B125C1000
1KAB60E	B250C1000
1KAB80E	B380C1000
1KAB100E	B500C1000

ELECTRICAL SPECIFICATIONS

	1KAB-E	Units	Conditions
I_O Max. DC output current	1.2	A	$T_A = 45^\circ\text{C}$, Resistive or inductive load
	1.0	A	$T_A = 45^\circ\text{C}$, Capacitive load
I_{FSM} Max. peak one cycle, non-repetitive surge current	50	A	50 Hz half cycle sine wave or 6 ms rectangular pulse
	52		60 Hz half cycle sine wave or 5 ms rectangular pulse
I^2t Max. I^2t capability for fusing	12.5	A^2s	$t = 10\text{ ms}$ Rated V_{RRM} applied following surge, initial $T_J = 150^\circ\text{C}$.
	11.3		$t = 8.3\text{ ms}$
	17.7	A^2s	$t = 10\text{ ms}$ $V_{RRM} = 0$ following surge, initial $T_J = 150^\circ\text{C}$.
	16.1		$t = 8.3\text{ ms}$
$I^2\sqrt{t}$ Max. $I^2\sqrt{t}$ capability for fusing ⑦	177	$\text{A}^2\sqrt{\text{s}}$	V_{RRM} following surge = 0, $t = 0.1$ to 10 ms
V_{FM} Max. peak forward voltage per leg	1.1	V	$I_O = 1.2\text{ A}$ (1.88 A pk)
I_{RM} Typical peak reverse current per leg	10	μA	At rated V_{RRM} , $T_J = 25^\circ\text{C}$
	500	μA	At rated V_{RRM} , $T_J = 150^\circ\text{C}$
f Operating frequency range	40 to 2000	Hz	

 ⑦ I^2t for time $t_K = I^2\sqrt{t} \cdot \sqrt{t_K}$
THERMAL AND MECHANICAL SPECIFICATIONS

	1KAB-E	Units	Conditions
T_J, T_{stg} Operating and storage junction temperature ranges	-40 to 150	$^\circ\text{C}$	
wt Approximate weight	3 (0.1)	g (oz.)	

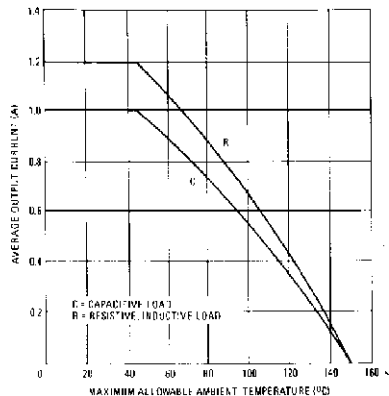


Fig. 1 – Average (DC) Output Current Vs. Maximum Allowable Ambient Temperature

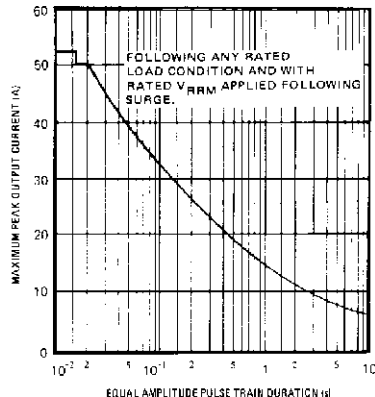


Fig. 2 – Maximum Non-Repetitive Surge Current Vs. Pulse Train Duration ($f = 50 \text{ Hz}$)

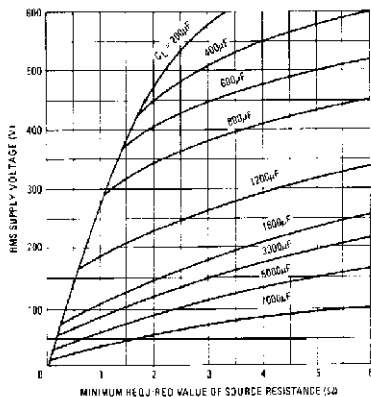


Fig. 3 – Minimum Required Source Resistance Vs. RMS Supply Voltage and Load Capacitance

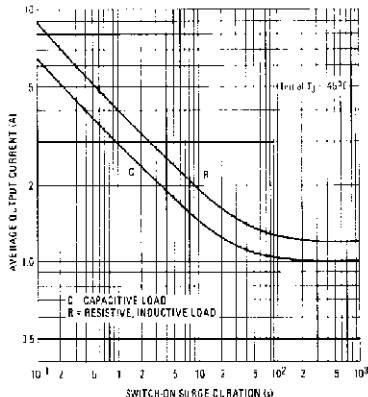


Fig. 4 – Maximum Switch-on Surge Current Vs. Surge Duration



Notice

The products described herein were acquired by Vishay Intertechnology, Inc., as part of its acquisition of International Rectifier's Power Control Systems (PCS) business, which closed in April 2007. Specifications of the products displayed herein are pending review by Vishay and are subject to the terms and conditions shown below.

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

International Rectifier®, IR®, the IR logo, HEXFET®, HEXSense®, HEXDIP®, DOL®, INTERO®, and POWIRTRAIN® are registered trademarks of International Rectifier Corporation in the U.S. and other countries. All other product names noted herein may be trademarks of their respective owners.