

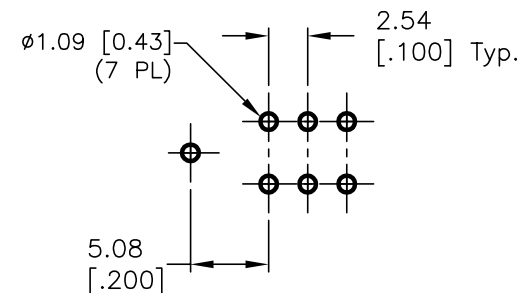
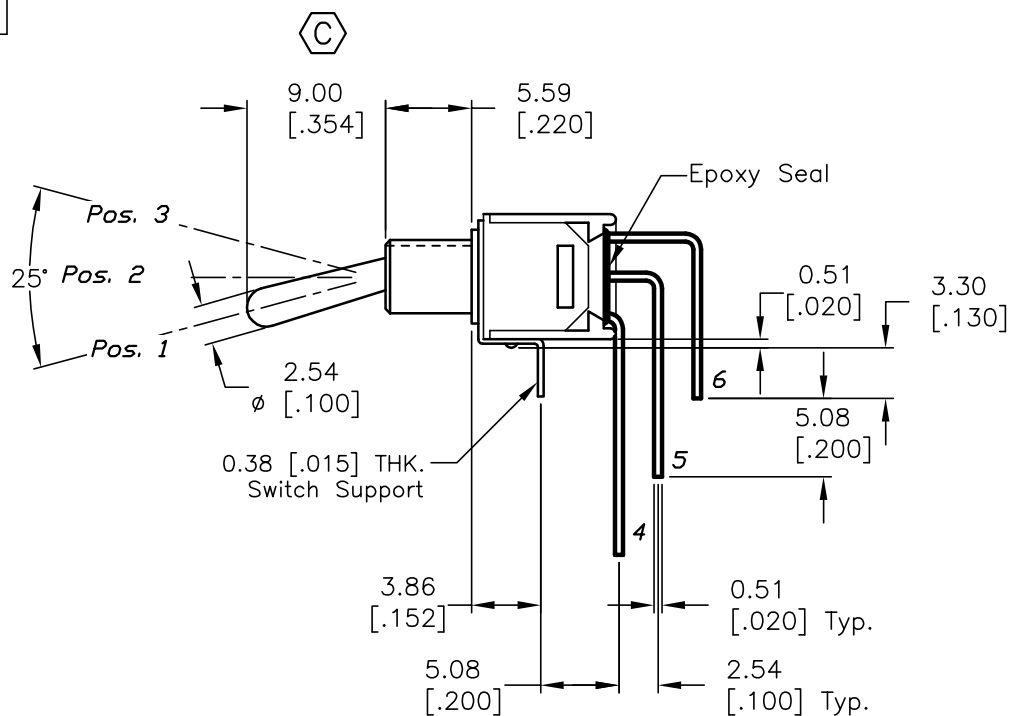


CIRCUIT: DPDT  
CONTACT CONFIGURATION

| SWITCH FUNCTION |        |         |
|-----------------|--------|---------|
| POS. 1          | POS. 2 | POS. 3  |
| ON              | OFF    | ON      |
| 2-3,5-6         | OPEN   | 2-1,5-4 |

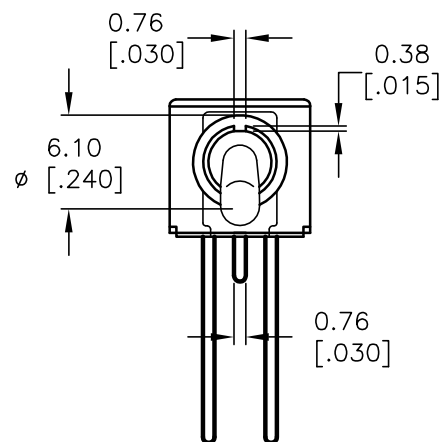

RECOMMENDED P.C.B. LAYOUT

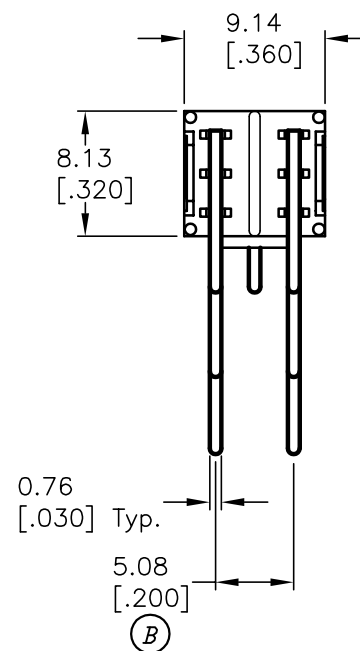

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
- TERM. NOS. FOR REF. ONLY
- RATING: 3A @120VAC or 28VDC; 1A @250VAC.
- FIXED TERM. MOVING CONTACT: Copper Alloy w/Silver plating
- ELECTRICAL LIFE: 30,000 make-and-break cycle  
at full load.
- DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
- OPERATING TEMP.: -30°C to 85°C

**E-SWITCH®**

|      |         |                         |          |      |
|------|---------|-------------------------|----------|------|
| C    | 14544   | CORRECT ACTUATOR LENGTH | 11/28/04 | AR   |
| B    | 11557   | REVISED                 | 6/22/01  | CJB  |
| REV. | ECN No. | DESCRIPTION             | DATE     | CHKD |

THE INFORMATION CONTAINED IN THIS DOCUMENT  
IS PROPRIETARY TO E-SWITCH AND IS  
NOT TO BE COPIED OR TRANSFERRED

TITLE

200MDP3T1B4M7QE

SCALE

2:1

DATE

3/30/01

DR

CJB

DWG

T211072

REV

C