



CIRCUIT: SPDT
CONTACT CONFIGURATION

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
ON	NONE	ON
2-3	OPEN	2-1

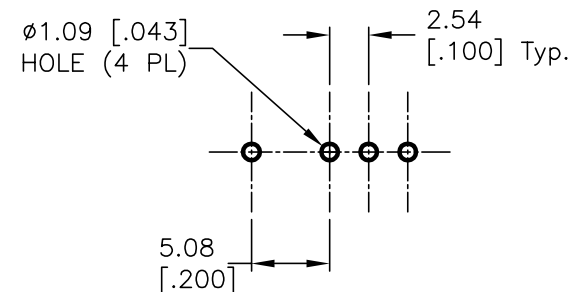

RECOMMENDED P.C.B. LAYOUT

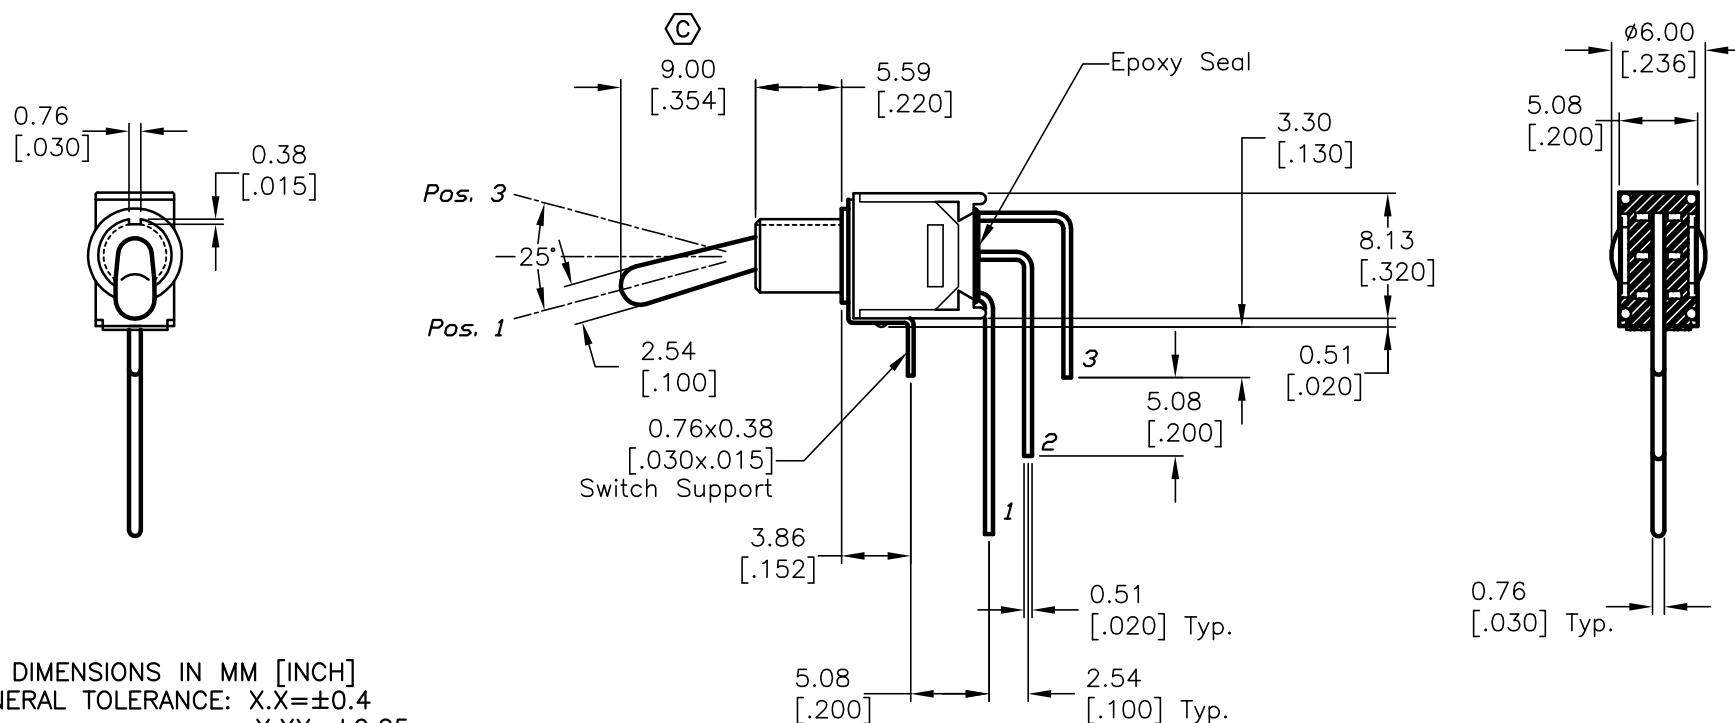

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERM. NOS. FOR REF. ONLY
- RATING: 3A @120VAC or 28VDC; 1A @250VAC.
- FIXED TERM. MOVING CONTACT: Silver plated Copper alloy
- ELECTRICAL LIFE: 30,000 make-and-break cycle
at full load.
- DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
- OPERATING TEMP.: -30°C to 85°C

E-SWITCH®

C	13760	CORRECT ACTUATOR	2/10/04	AR
B	11553	REVISED	6/29/01	CB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

TITLE				
200MSP1T1B4M7QE				
SCALE	DATE	DR	DWG	REV
2:1	6/29/01	CB	T211032	C