



2709



2709-X-07-XX-00-00-07-0
Swage mount in 2,95 hole


- X -	Board Thickness	Length V	Length A
2	1,57	2,77	7,14
3	2,39	3,58	6,35

8602




8602-1-00-XX-00-00-07-0
Square press-fit in 0,81 plated thru hole

2115

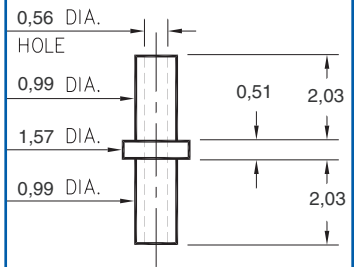


2115-2-00-XX-00-00-07-0
Swage mount in 1,09 hole
For 1,57 thick board

2326




2326-2-00-XX-00-00-07-0
Swage mount in 1,40 hole
for 1,57 thick board

8831




8831-0-00-XX-00-00-03-0
Press-fit in 1,45 mounting hole

8835



8835-0-00-XX-00-00-03-0
Press-fit in 1,45 mounting hole

8836

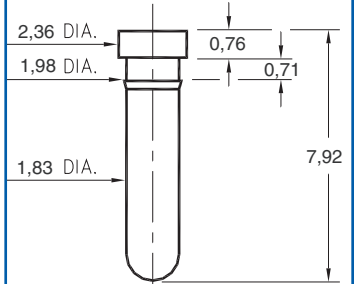

8836-0-00-XX-00-00-03-0
Press-fit in 1,91 mounting hole

SPECIFICATIONS

PIN MATERIAL:
Brass Alloy 360, 1/2 Hard
(Except Swage pins which are annealed)

PART MANUFACTURED IN INCHES, METRIC FOR REF ONLY

TOLERANCES ON:
LENGTHS: $\pm 0,13$
DIAMETERS: $\pm 0,05$
ANGLES: $\pm 2^\circ$

ORDER CODE: XXXX - X - 0X - XX - 00 - 00 - 0X - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01** 5,08 μm TIN/LEAD OVER NICKEL
- 80** 5,08 μm TIN OVER NICKEL $\diamond$
- 44** 7,62 μm SILVER OVER COPPER $\diamond$
- 50** 7,62 μm ELECTRO-SOLDER (60/40 SnPb)

