

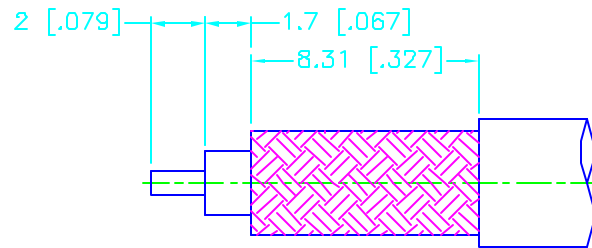
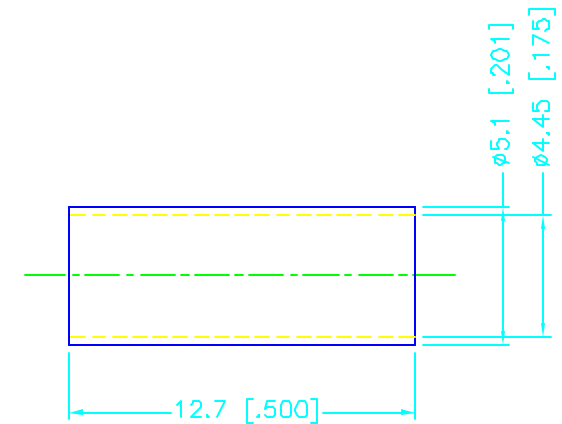


REV.	DATE	DESCRIPTION
NC	11/20/97	INITIAL RELEASE

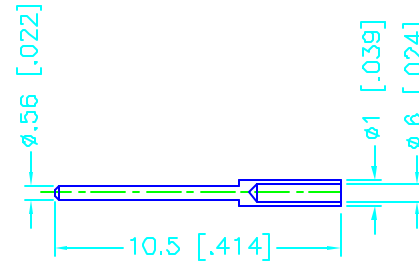

RECOMMENDED
CABLE STRIPPING DIM'S

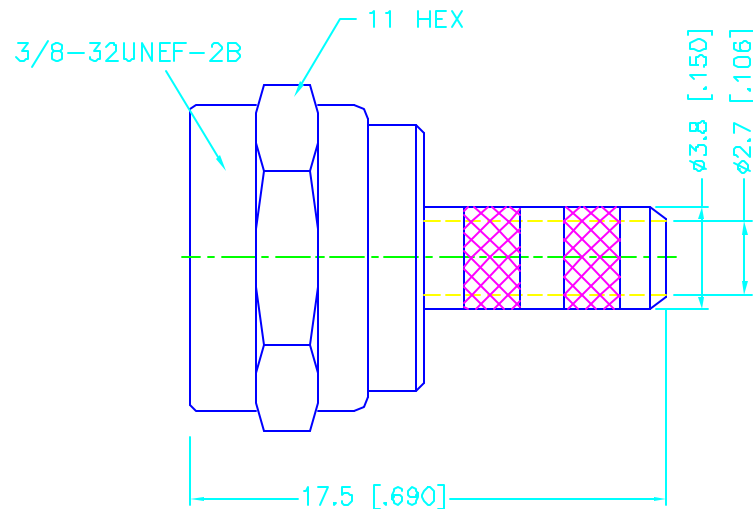

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS.	APPROVALS	DATE	 Connex Connector Corporation			
1 BODY	BRASS	NICKEL	DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY.	DRAWN G.R.S.	10/27/97				
2 INSULATOR	TEFLON	NATURAL		CHECKED		TITLE			
3 CONTACT PIN	BER. COPPER	GOLD	TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4	ISSUED		F CRIMP PLUG (FOR BELDEN 8218 CABLE)			
4 FERRULE	COPPER	GOLD				SIZE	FSCM NO.	DWG. NO.	REV.
5						A	99001	222126.DWG	NC
6									
7									
8			DO NOT SCALE DRAWING			SCALE	NA	PART NO. 222126	SHEET 1 OF 1