

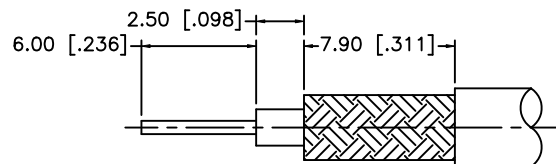
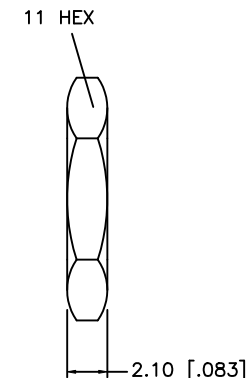



REV.	DATE	ECR NO.	DESCRIPTION
NC	09/07/08	—	INITIAL RELEASE

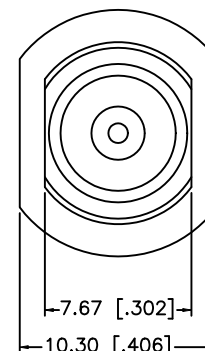

RECOMMENDED CABLE
STRIPPING DIM'S

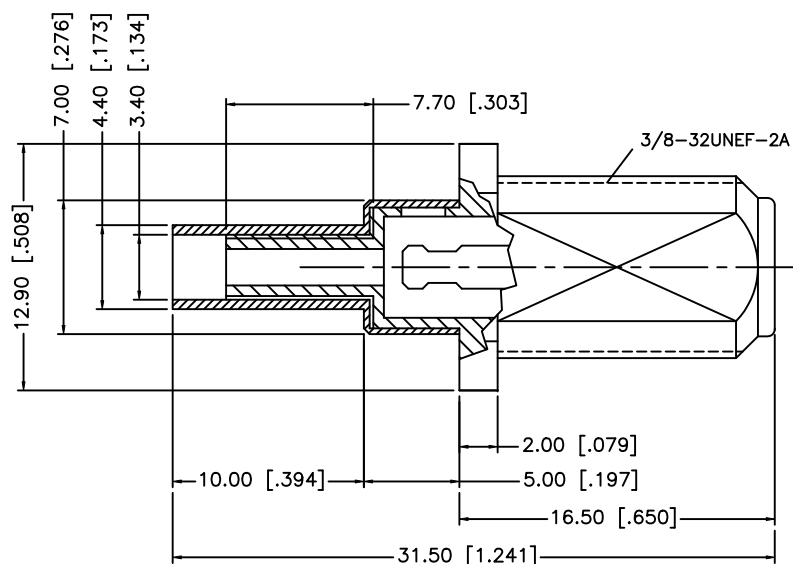

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
8						DRAWN	GRS	09/07/08						
7						CHECKED								
6						ISSUED				PART DESCRIPTION F BULKHEAD CRIMP JACK (FOR RG-179 DOUBLE BRAID CABLE)				
5	FERRULE	BRASS	TIN LEAD	1		SHEET	1 OF 1							
4	INSULATOR	P.P.	NATURAL	1					PART NO. 222167-10					
3	CONTACT PIN	BER. COPPER	BRT. TIN	1										
2	INSULATOR	P.P.	NATURAL	1					DWG. NO. 222167-10.DWG					
1	BODY	BRASS	TIN LEAD	1										
	DESCRIPTION	MATERIAL	FINISH	QTY			CAD FILE C:/222/222167-10.DWG		REV.	NC	SIZE	A	SCALE	NA