


2304/2305

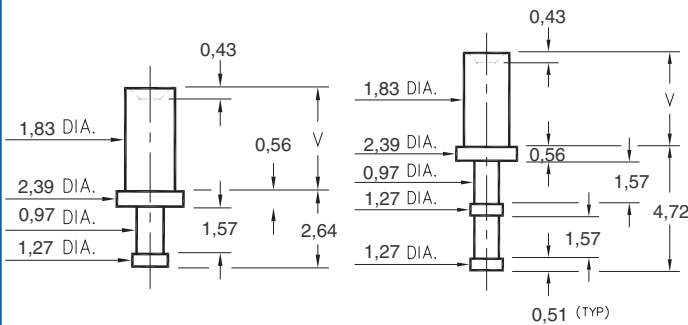

- X -	Board Thickness	Length V
1	0,79	1,30
2	1,57	2,08
3	2,39	2,87
4	3,18	3,68


2304-X-00-XX-00-00-07-0

Swage mount in 1,93 hole

2305-X-00-XX-00-00-07-0

Swage mount in 1,93 hole

2503




- X -	Board Thickness	Length V	Depth D
1	0,79	1,98	1,72
2	1,57	2,77	
3	2,39	3,58	2,49
4	3,18	4,37	

2503-X-00-XX-00-00-07-0

Swage mount in 2,08 hole

2704




- X -	Board Thickness	Length V
1	0,79	1,91
2	1,57	2,67
3	2,39	3,43
4	3,18	4,19

2704-X-00-XX-00-00-07-0


Swage mount in 2,08 hole

2306/2307/2311




2306-X-00-XX-00-00-07-0

Swage mount in 1,93 hole



2307-X-00-XX-00-00-07-0

Swage mount in 1,93 hole



2311-X-00-XX-00-00-07-0

Swage mount in 1,93 hole

- X -	Board Thickness	Length V
1	0,79	1,30
2	1,57	2,08
3	2,39	2,87
4	3,18	3,68

SPECIFICATIONS

PIN MATERIAL:
Brass Alloy 360, 1/2 Hard
(Except Swage pins which are annealed)

PART MANUFACTURED IN INCHES, METRIC FOR REF ONLY

TOLERANCES ON:

LENGTHS: $\pm 0,13$
DIAMETERS: $\pm 0,05$
ANGLES: $\pm 2^\circ$

ORDER CODE: 2XXX - X - 00 - XX - 00 - 00 - 07 - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01** 5,08 μm TIN/LEAD OVER NICKEL
- 80** 5,08 μm TIN OVER NICKEL $\diamond$
- 44** 7,62 μm SILVER OVER COPPER $\diamond$
- 50** 7,62 μm ELECTRO-SOLDER (60/40 SnPb)

