

HONEYWELL PART NUMBER
23SX39-T
PRODUCT CODE VDP3900
JG-NUMBER JG-83701
MILITARY PART NUMBER MS24547-2

REV	DOCUMENT	CHANGED BY	CHECK
12	0038450	PK 03JUN08	ASD




B

A

A

B

A

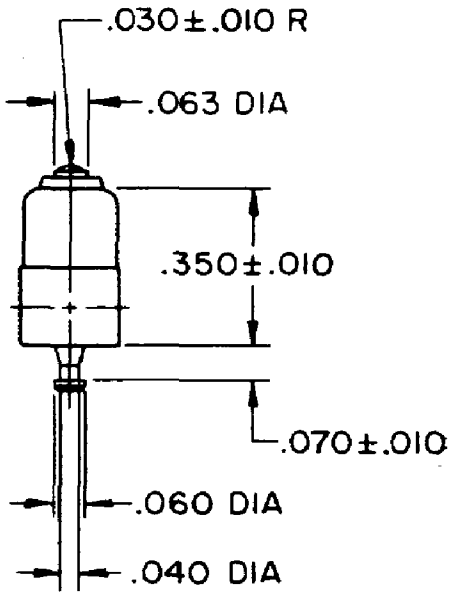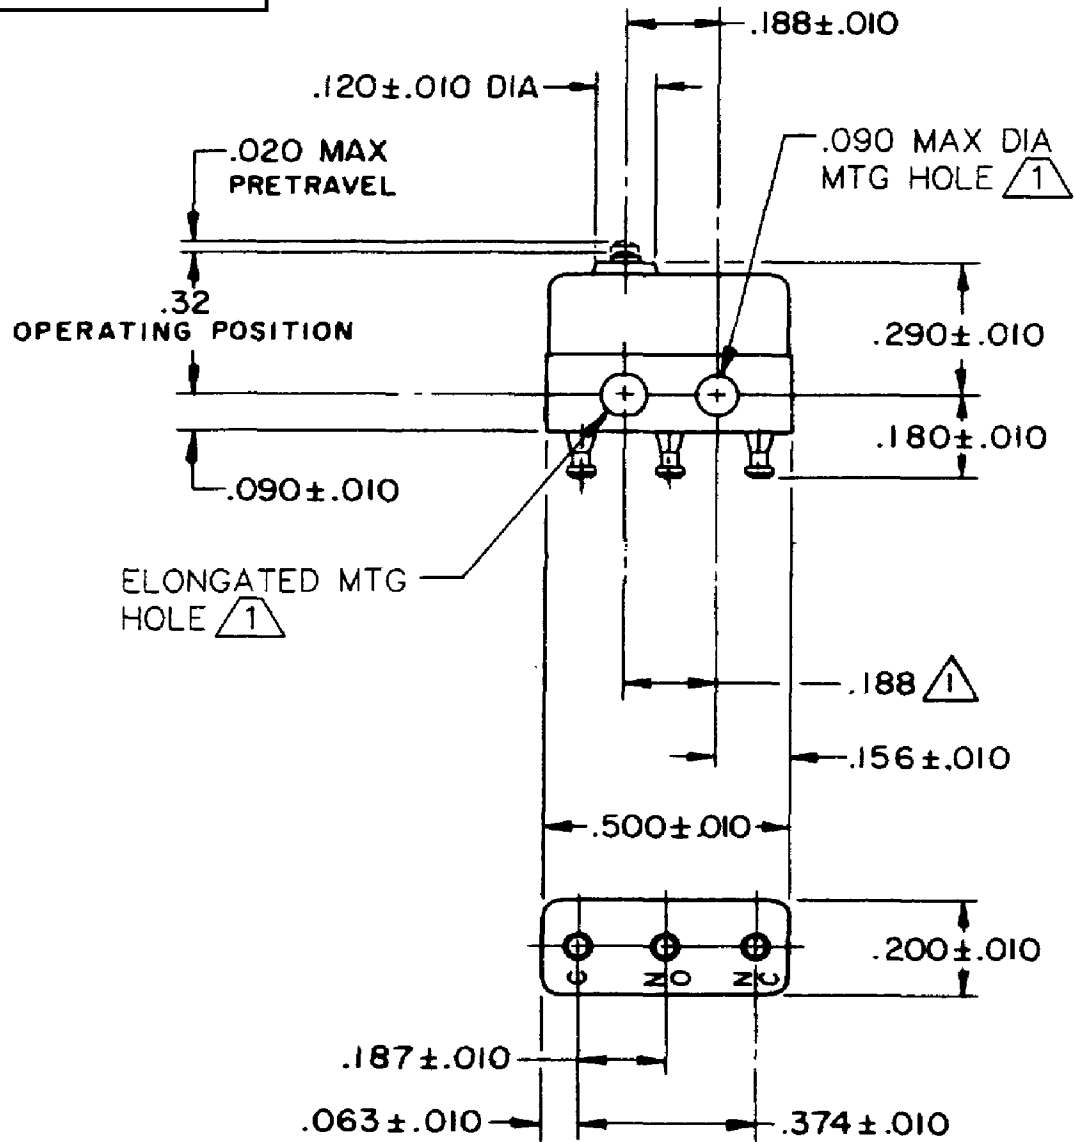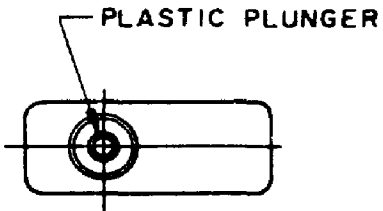

- NOTES**
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188±.002 CENTERS
 - 2 - TERMINALS ARE PLATED FOR SOLDERING
 - 3 - MOVABLE CONTACT MATERIAL - 24 K SOLID GOLD OVERLAY
 - 4 - STATIONARY CONTACT MATERIAL - GOLD ALLOY
 - 5 - SWITCH WILL WITHSTAND TEMPERATURE OF 185° F

RELEASE NO.	SR 12677
REPLACES	

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ± THIRD ANGLE PROJECTION 		DRAWN	SPK	21FEB08	Honeywell				
OPERATING FORCE — — — 5 OZ MAX		CONTACT ARRANGEMENT SPDT					CHECK	RJ	21FEB08					
RELEASE FORCE— — — — 1 OZ MIN		30 VOLTS DC RATING					0.030 0.015 0.005		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC		
DIFFERENTIAL TRAVEL— — — .005 MAX			SEA LEVEL	50,000 FT										
OVERTRAVEL — — — — — .004 MIN		INDUCTIVE	0.5 AMP	0.5 AMP										
		RESISTIVE	1 AMP	1 AMP			INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME		REV
		MAXIMUM INRUSH 2 AMP					RASTER			B	I	23SX39-T		12
		APPROVALS	KEMA, CE	1A 250 V ~ T125 25E3 						SCALE	-	WEIGHT:.003 LB MAX	SHEET 1 OF 1	
			UL, CSA	1A 125 VAC  BRAND L22J										
			MILITARY	MS24547 - 2										