
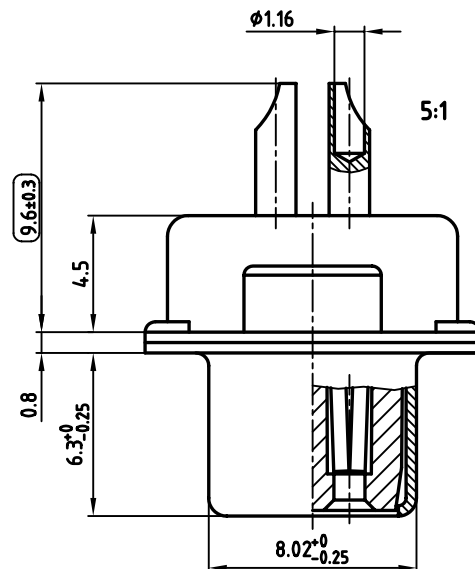

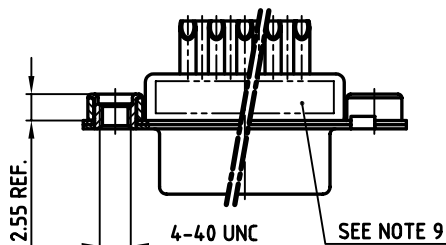


POS.	A ^{-0.76}	B ^{-0.25}	C	PART-NO.
9	31.19	16.46	25.00 ^{+0.12 -0.13}	242A27020X
15	39.52	24.79	33.30 ^{+0.15 -0.1}	242A27030X
25	53.42	38.50	47.04 ^{±0.13}	242A27040X
37	69.70	54.96	63.50 ^{±0.13}	242A27050X

used for: D-SUB FILTER

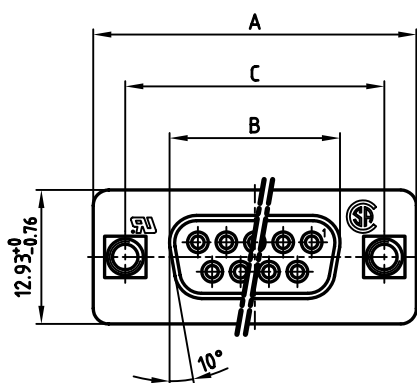

NOTES:

- METALSHELLS: STEEL; min. 320 μ " TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: 8 μ " HARD GOLD OVER min. 50 μ " NICKEL
SOLDER CUP ACCEPTS CABLE AWG 20
- THREADED INSERT: COPPER ALLOY; min. 200 μ " TIN over 80 μ " NICKEL
- COLLAR: COPPER ALLOY; min. 200 μ " TIN over 80 μ " NICKEL
- CAPACITANCE: 1300pF $\pm$ 20%
- DIELECTRIC WITHSTANDING VOLTAGE: 424 VDC
- MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
- CONNECTOR IS PART MARKED: PART-NO. CONEC ABC
- ☐ = CHECK DIMENSION

Directive 2002/95/EC
RoHS
Compliant

APPROVAL # FREIGABE # DEBLOCKAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCKAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance	date	name
2006	03.02.	Lehmenkühler
drawn	03.02.	Mickenbecker
appd.		
norm		DIN 41652
d-old		

scale:	2:1
material:	SEE NOTES
title:	
D-SUB FILTER FEMALE	
9-37pos. SOLDER CUP	
with threaded insert	
dwg no:	AutoCAD 2004
24K1A756	
part no:	SEE TABLE