
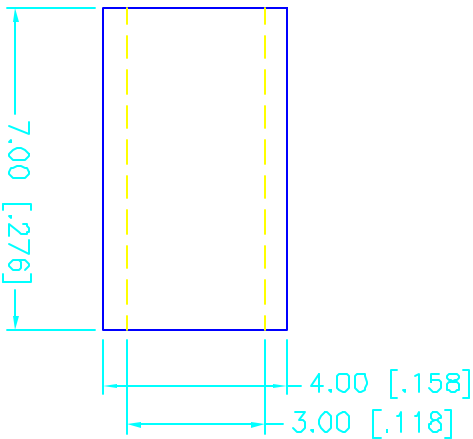
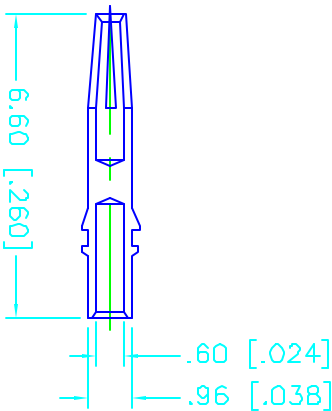
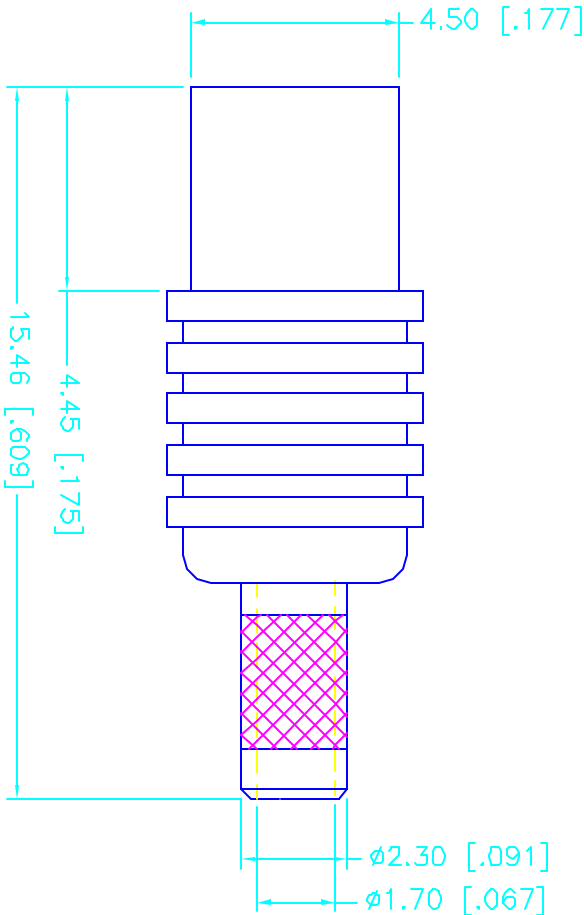


REV.	DATE	DESCRIPTION
NC	01/22/98	INITIAL RELEASE

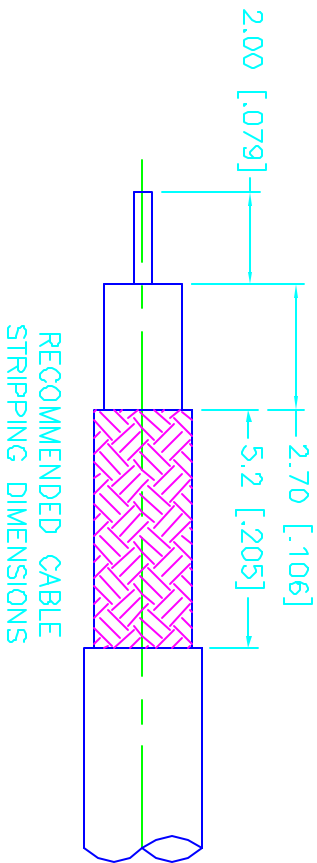

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS		APPROVALS		DATE	 Connector Corporation MCX CRIMP JACK (FOR RG-174/U, 188A/U, 316/U CABLE)			
1	BODY	BRASS	GOLD	DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY	DRAWN	G.R.S.	01/22/98				
2	INSULATOR	TEFLON	NATURAL	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:	CHECKED			 Connector Corporation MCX CRIMP JACK (FOR RG-174/U, 188A/U, 316/U CABLE)			
3	CONTACT PIN	BER. COPPER	GOLD	0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4	ISSUED						
4	FERRULE	COPPER	GOLD					 Connector Corporation MCX CRIMP JACK (FOR RG-174/U, 188A/U, 316/U CABLE)			
5											
6								 Connector Corporation MCX CRIMP JACK (FOR RG-174/U, 188A/U, 316/U CABLE)			
7											
8								 Connector Corporation MCX CRIMP JACK (FOR RG-174/U, 188A/U, 316/U CABLE)			

TITLE	SIZE	FSOM NO.	DWG. NO.	REV.
A	99001	252139.DWG	NC	

SCALE	NA	PART NO.	SHEET	1 OF 1
-------	----	----------	-------	--------