

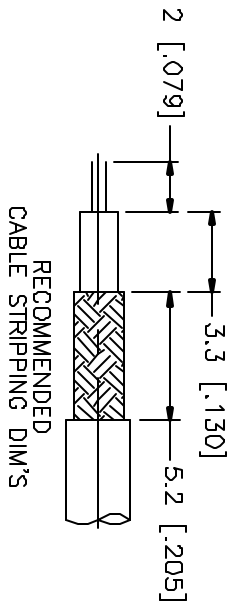


REV.	DATE	DESCRIPTION
NC	01/21/01	INITIAL RELEASE

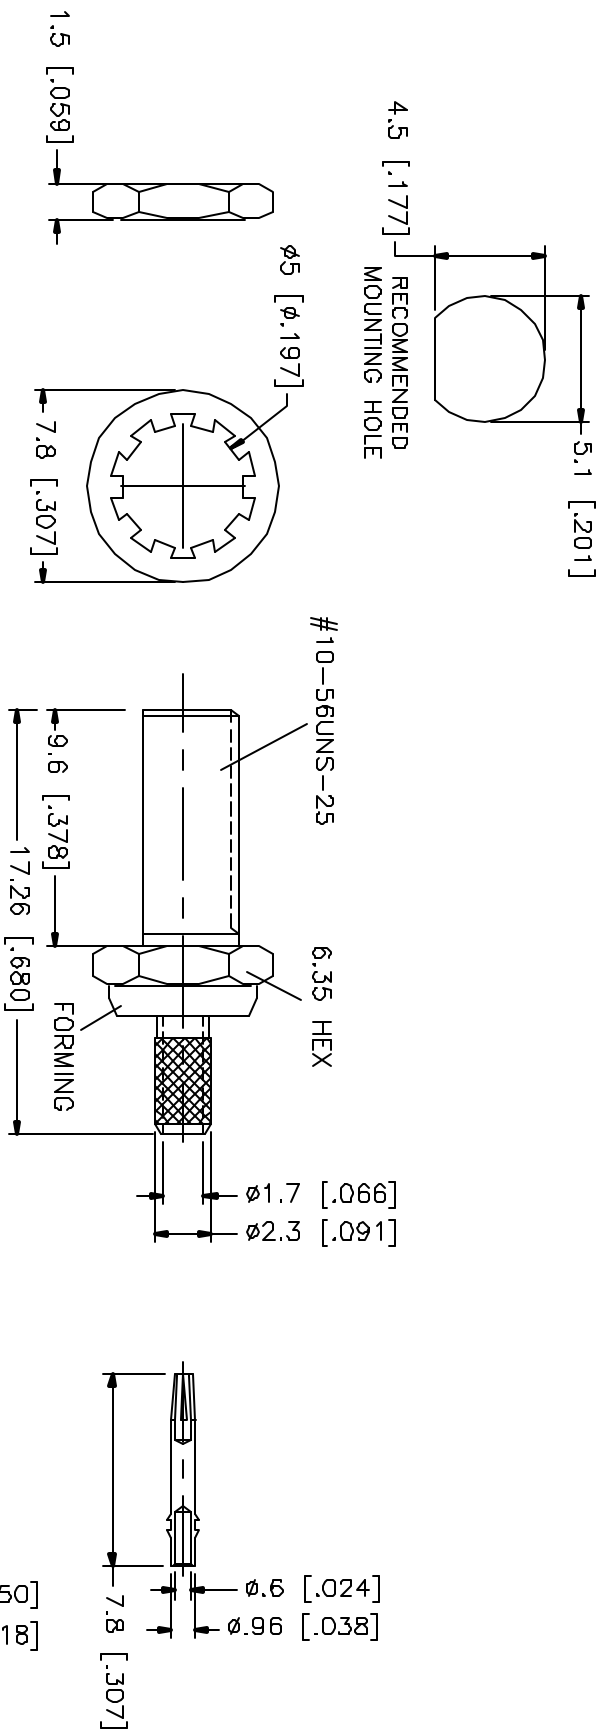

- CRIMP NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
 2. CONTACT PIN TO SOLDER
 3. MAX. PANEL THICKNESS = 6.8mm

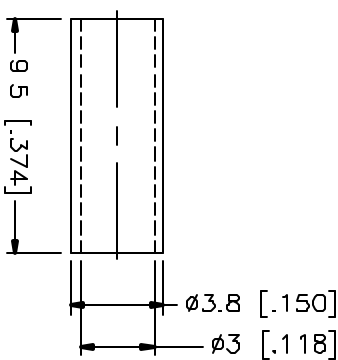

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY	APPROVALS	DATE	TITLE	SCALE	NA	PART NO.	SHEET	1 OF 1
1 BODY	BRASS	GOLD		DRAWN	G.R.S.	01/21/01					
2 INSULATOR	TEFLON	NATURAL		CHECKED							
3 BARREL	BRASS	GOLD									
4 CONTACT PIN	BER. COPPER	GOLD	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4	ISSUED							
5 LOCK WASHER	BRASS	GOLD									
6 HEX NUT	BRASS	GOLD									
7 FERRULE	COPPER	GOLD									
8			DO NOT SCALE DRAWING								

connex
Connector Corporation

MCX BULKHEAD CRIMP JACK
(FOR RG-174/U, 188A/U, 316/U)

SIZE FSCH NO. 99001 DWG NO. 252145.DWG REV NC