
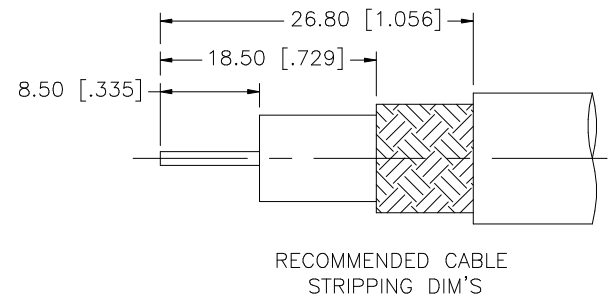
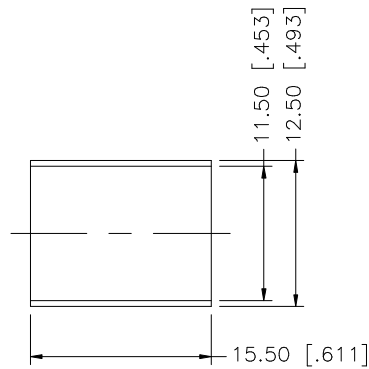


REV.	DATE	DESCRIPTION
A	12/29/00	REVISE PLATING TO SILVER
B	07/30/06	REVISE PLATING TO NEXCOTE, UPDATE DRAWING FORMAT
C	12/16/06	REVISE BODY STYLE

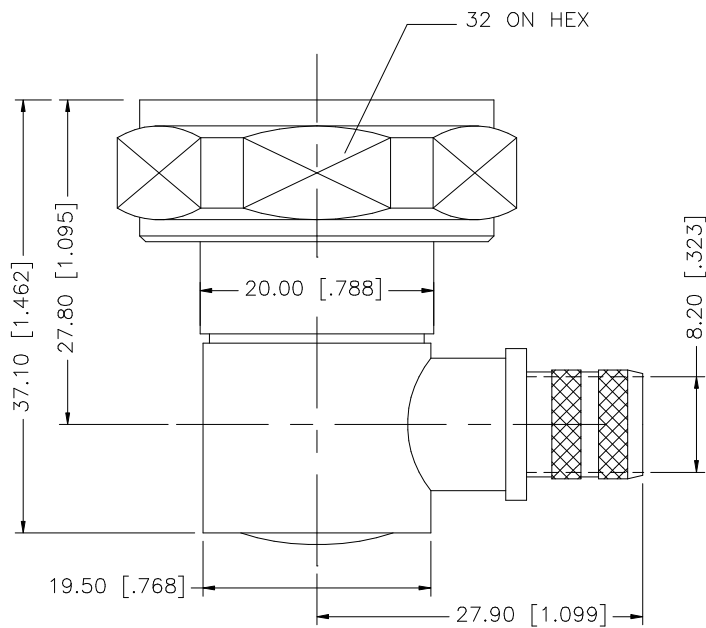

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .429"

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex						
7						DRAWN	G.R.S.							12/16/06
6						CHECKED								
5	FERRULE	COPPER	NEXCOTE	1					PART DESCRIPTION 7/16 R/A PLUG (FOR LMR400 CABLE)					
4	GASKET	SILICONE	BLACK	1										
3	CONTACT PIN	BRASS	SILVER	1					PART NO. 272115					
2	INSULATOR	TEFLON	NATURAL	1										
1	BODY	BRASS	NEXCOTE	1					DWG. NO. 272115.DWG REV. C SIZE A SCALE NA					
	DESCRIPTION	MATERIAL	FINISH	QTY										
								C:/272/272115.DWG						