


2715




2715-X-01-XX-00-00-07-0

Swage mount in 2,95 hole

- X -	Board Thickness	Length V
2	1,57	2,77
3	2,39	3,58
4	3,18	4,37

2809




2809-X-01-XX-00-00-07-0

Swage mount in 2,95 hole


- X -	Board Thickness	Length V	Depth D
1	0,79	1,98	1,73
2	1,57	2,76	
3	2,39	3,58	2,49
4	3,18	4,36	

2701/2808



2701-X-01-XX-00-00-07-0

Swage mount in 2,95 hole




2808-X-01-XX-00-00-07-0

Swage mount in 2,95 hole

- X -	Board Thickness	Length V
1	0,79	1,91
2	1,57	2,67
3	2,39	3,43
4	3,18	4,19


2762

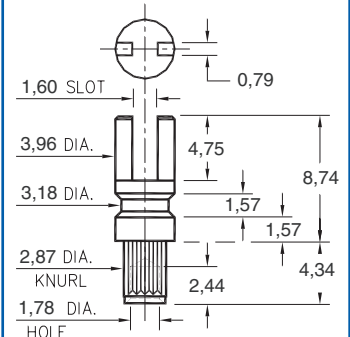

2762-4-01-XX-00-00-07-0

Swage mount in 2,95 hole
For 3,18 thick board

2807



2807-X-01-XX-00-00-07-0

Swage mount in 2,95 hole

- X -	Board Thickness	Length V
1	0,79	1,98
2	1,57	2,77
3	2,39	3,56
4	3,18	4,34

SPECIFICATIONS

PIN MATERIAL:
Brass Alloy 360, 1/2 Hard
(Except Swage pins which
are annealed)

**PART MANUFACTURED IN
INCHES, METRIC FOR REF ONLY**

TOLERANCES ON:
LENGTHS: $\pm 0,13$
DIAMETERS: $\pm 0,05$
ANGLES: $\pm 2^\circ$

ORDER CODE: 2XXX - X - 01 - XX - 00 - 00 - 07 - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01** 5,08 μ m TIN/LEAD OVER NICKEL
- 80** 5,08 μ m TIN OVER NICKEL $\diamond$
- 44** 7,62 μ m SILVER OVER COPPER $\diamond$
- 50** 7,62 μ m ELECTRO-SOLDER
(60/40 SnPb)

