


Diagram illustrating the recommended cable stripping dimensions for a 12.30 inch cable. The dimensions are as follows:

- Outer Jacket: 4.00 [.158]
- Insulation: 2.00 [.079]
- Braided Shield: 1.00 [.039]
- Total Cable Length: 12.30 [.485]

Additional instructions:

- REMOVE FOIL 1mm MIN.
- RECOMMENDED CABLE STRIPPING DIM'S

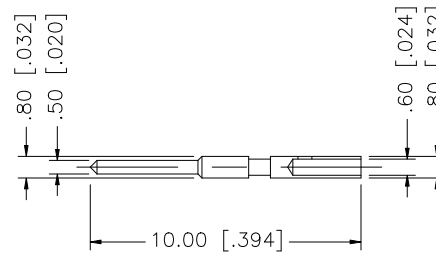

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex								
8						DRAWN	G.R.S.	11/18/07										
7						CHECKED												
6						ISSUED				PART DESCRIPTION 1.0/2.3 CRIMP PLUG (FOR 735A CABLE – 75ohm)								
5						SHEET		1 OF 1										
4	FERRULE	COPPER	NICKEL	1														
3	CONTACT PIN	BRASS	GOLD	1						PART NO. 282118-75								
2	INSULATOR	TEFLON	NATURAL	1														
1	BODY	BRASS	NICKEL	1														
	DESCRIPTION	MATERIAL	FINISH	QTY	CAD FILE		C:/282/282118-75.DWG		DWG. NO.		282118-75.DWG		REV.	B	SIZE	A	SCALE	NA