
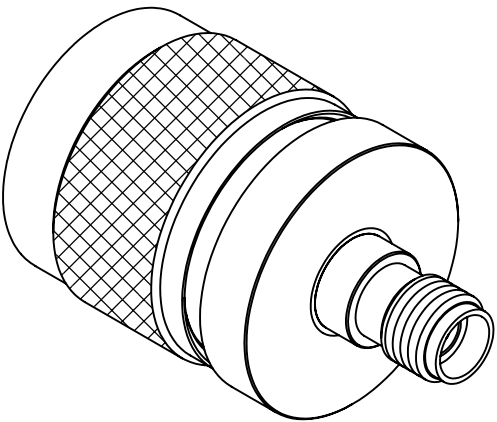


	5		4		3		2		1
PART NUMBER	ITEM ① NUT	ITEM ② BODY	ITEM ② BODY						DRAWING NO. 29-3840
29-3840	BRASS NICKEL PLATED	BRASS NICKEL PLATED	BRASS NICKEL PLATED						REVISIONS

RELEASE FOR QUOTATION									
A	03-30-06	W	W	T					
ADD NOTE 4&5									
B	11-08-06	W	W	T					
CHANGE SOME TOLERANCE. ADD THREAD CHAMFER									
C	12-26-06	L	Y	T					

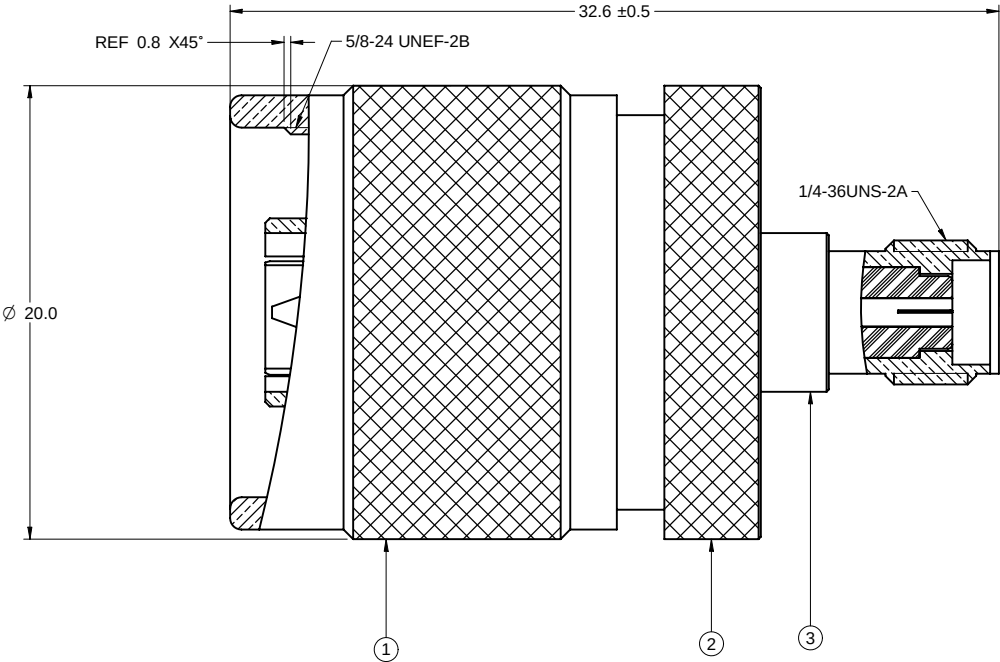

THIS DRAWING TO BE INTERPRETED
PER ANSI Y 14.5M - 1994

COMPANY CONFIDENTIAL

EMERSON
Network Power

**Connectivity
Solutions**

TITLE
SMA JACK TO N PLUG

SHEET 1 OF 1
DRAWING NO. 29-3840
SIZE C

- NOTES:
- ELECTRICAL SPECIFICATIONS
N IMPEDANCE: 50 OHM
SMA IMPEDANCE: 50 OHM
WORKING VOLTAGE: 500 VOLTS RMS AT SEA LEVEL
DIELECTRIC WITHSTANDING VOLTAGE: 1500 VOLTS RMS AT SEA LEVEL
INSULATION RESISTANCE: 5000 MEGOHMS MIN
 - ENVIRONMENTAL SPECIFICATIONS
TEMPERATURE RANGE: -55 °C TO +85 °C
 - MECHANICAL CHARACTERISTICS:
DURABILITY: 500 CYCLES
 - PRODUCT SHOULD BE RoHS COMPLIANCE
 - PACKAGING REQUIREMENT FOLLOWS ENGINEERING DOCUMENT P/N 836-40200001XX

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY LINDA.WU	DATE 12-26-06
DECIMALS	mm	CHECKED BY BETTY.YU	DATE 12-26-06
X	+ 0.5	APPROVED BY THOMAS	DATE 12-26-06
X.X	+ 0.2		
X.XX	+ 0.1		
ANGLES	+ 0.5°	U/M	mm
THIS DRAWING WAS PRODUCED BY COMPUTER, DO NOT SCALE DRAWING OR UPDATE MANUALLY.			