

# International Rectifier

## 2KBB SERIES

### 1.9A single phase rectifier bridge

#### Maximum Ratings and Characteristics


		2KBB..	Units
$I_O$		1.9	A
$I_{FSM}$	50Hz	50	A
	60Hz	52	A
$I^2t$	50Hz	17.7	A <sup>2</sup> s
	60Hz	16.1	A <sup>2</sup> s
$V_{RRM}$		100 to 1000	V
$T_J$		-40 to 150	°C

#### Description/Features

A 1.9A single phase diode bridge rectifier assembly consisting of four silicon junction diodes in a plastic encapsulation, intended for general applications in industrial and consumer equipment.

- Suitable for printed circuit board mounting
- Leads on standard 2.54mm (0.1in.) grid
- Compact construction
- High surge current capability
- Polarized package
- Equivalent to standard DIN parts
- RoHS Compliant

Part number	DIN code equivalent
2KBB05	B20C1500
2KBB10	B40C1500
2KBB20	B80C1500
2KBB40	B125C1500
2KBB60	B250C1500
2KBB80	B380C1500
2KBB100	B500C1500

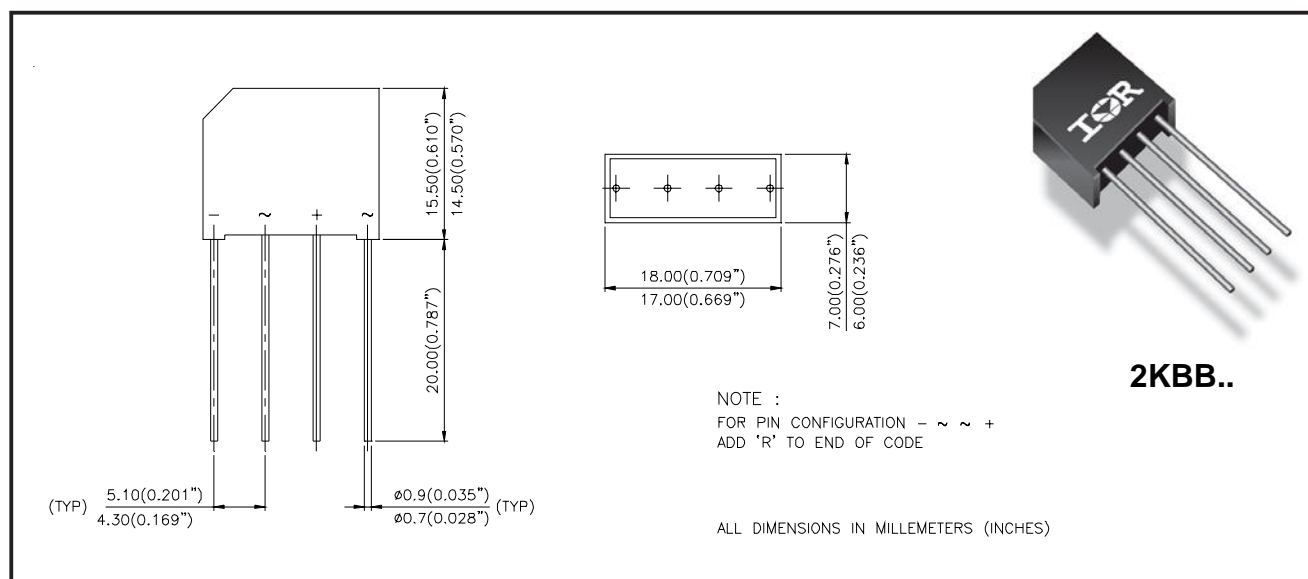

### Reverse voltage ratings and application data

Part number	$V_{RRM}$ , $V_{RSM}$ max. peak rev. voltage $T_J = 15^\circ\text{C}$	$I_{RM}$ , typical peak rev. current per diode at rated $V_{RRM}$ $T_J = 150^\circ\text{C}$		Application data (see figure 3)		
				$V_{RSM}$ max. recommended AC supply voltage	$C_{max}$ max. load capacitance	$R_{min}$ min. source resistance
	V	$\mu\text{A}$	$\mu\text{A}$	V	$\mu\text{F}$	$\Omega$
2KBB05, 2KBB05R	50	10	500	20	7000	0.3
2KBB10, 2KBB10R	100	10	500	40	5000	0.5
2KBB20, 2KBB20R	200	10	500	80	3300	0.8
2KBB40, 2KBB40R	400	10	500	125	1600	1.5
2KBB60, 2KBB60R	600	10	500	250	1200	2.5
2KBB80, 2KBB80R	800	10	500	380	800	3.0
2KBB100, 2KBB100R	1000	10	500	500	600	5.0

## Electrical Specification

### Forward Conduction

Parameters	2KBB...	Unit	Conditions
$I_O$ Maximum DC output current	1.9	A	$T_C = 45^\circ\text{C}$ , Resistive & inductive load
	1.5		$T_C = 45^\circ\text{C}$ , Capacitive load
$I_{FSM}$ Maximum peak, one-cycle non-repetitive surge current,	50		$t = 6\text{ms}$ Following any rated load condition, and with rated
	52		$t = 5\text{ms}$ $V_{RRM}$ applied following surge
$I^2t$ Maximum $I^2t$ for fusing, initial $T_J = T_{Jmax}$	12.5	$\text{A}^2\text{s}$	$t = 10\text{ms}$ Rated $V_{RRM}$ applied following
	11.3		$t = 8.3\text{ms}$ surge, initial $T_J = 150^\circ\text{C}$
	17.7	$\text{A}^2\text{s}$	$t = 10\text{ms}$
	16.1		$t = 8.3\text{ms}$
$I^2\sqrt{t}$ Maximum $I^2\sqrt{t}$ capability for fusing	177	$\text{A}^2\sqrt{\text{s}}$	$V_{RRM}$ following surge = 0, $t = 0.1$ to $10\text{ms}$ $I^2t$ for time $t_x = I^2\sqrt{t} \cdot \sqrt{t_x}$
$V_{FM}$ Maximum peak forward voltage per diode	1.1	V	$I_O = 1.9\text{A}$ (3.0 A pk)
f Operating frequency range	40 to 2000	Hz	

## Thermal and Mechanical Specifications

Parameters	2KBB...	Unit	Conditions
$T_J$ Operating and storage $T_{stg}$ temperature range	-40 to 150	$^\circ\text{C}$	
Wt Approximate weight	4 (0.14)	g (oz)	

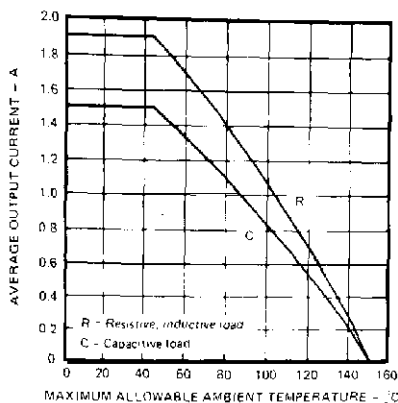


Fig. 1 - Average (DC) Output Current Vs. Maximum Allowable Ambient Temperature

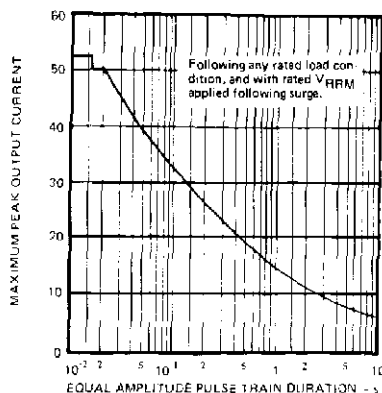


Fig. 2 - Maximum Non-repetitive Surge Current Vs. Pulse Train Duration ( $f = 50$  Hz)

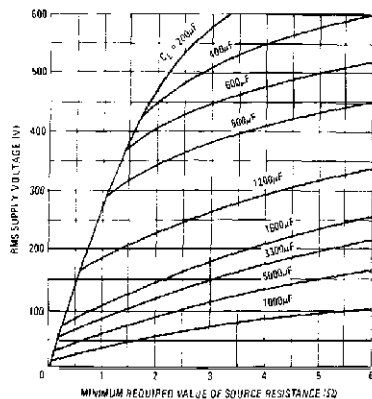


Fig. 3 - Minimum Required Source Resistance Vs. RMS Supply Voltage and Load Capacitance

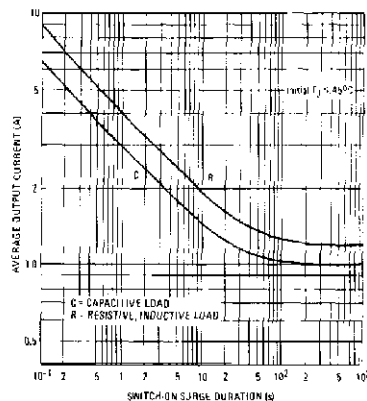


Fig. 4 - Maximum Switch-On Surge Current Vs. Surge Duration



### Notice

The products described herein were acquired by Vishay Intertechnology, Inc., as part of its acquisition of International Rectifier's Power Control Systems (PCS) business, which closed in April 2007. Specifications of the products displayed herein are pending review by Vishay and are subject to the terms and conditions shown below.

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

International Rectifier®, IR®, the IR logo, HEXFET®, HEXSense®, HEXDIP®, DOL®, INTERO®, and POWIRTRAIN® are registered trademarks of International Rectifier Corporation in the U.S. and other countries. All other product names noted herein may be trademarks of their respective owners.