

CATALOG LISTING

2NT1-50 SERIES CHART 1

PAGE 1 OF 1

RELEASE NO. PR-21800

CHECK

REVISIONS

A CO-94328

S A V

22 NOV 99

CHECK

22 NOV 99

JAF

CHECK

22 NOV 99

PTC/CAD 2D

DRAWN

S A V

22 NOV 99

REPLACES



MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH - TOGGLE


CATALOG LISTING
2NT1-50 SERIES
CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH



CATALOG LISTING	AVAILABLE LOCKING COMBINATIONS FOR CONFIGURATION SEE LETTERED DETAILS	STYLE NUMBER	CURRENT CAPACITY (AMPS)							
			RESISTIVE LOAD				LAMP LOAD		INDUCTIVE LOAD	
			DC VOLTS	AC VOLTS	AC VOLTS	AC VOLTS	28 VDC	125 VAC	28 VDC	125 VAC
2NT1-50	NONE	1	18	.75	.5	11	6	5	2	10
2NT1-50/4	E, F, K, L, M, N	2								

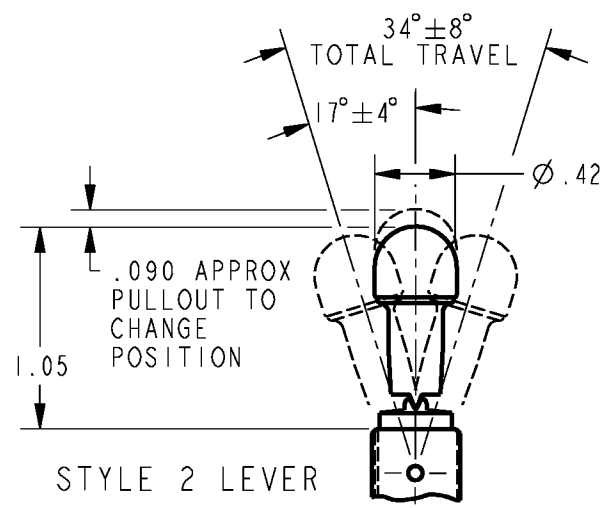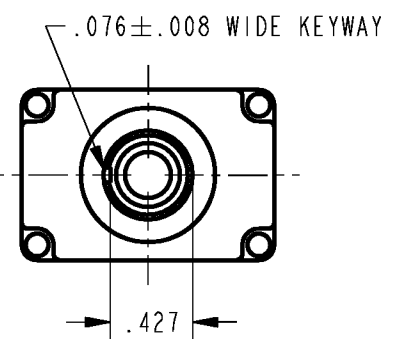

"A" 4 LOCKED IN THREE POSITIONS	"B" 4 LOCKED IN CENTER AND EXTREME POS. (KEYWAY SIDE)	"D" 4 LOCKED OUT OF CENTER POSITION	"E" 4 LOCKED IN CENTER POSITION	"F" 4 LOCKED IN EXTREME POS. (OPP. KEYWAY)	"G" 4 LOCKED IN EXTREME POS. (KEYWAY SIDE)
"H" 4 LOCKED OUT OF CENTER AND EXTREME POS. (KEYWAY SIDE)	"J" 4 LOCKED OUT OF CENTER AND EXTREME POS. (OPP. KEYWAY)	"K" 4 LOCKED IN CENTER AND EXTREME POS. (OPP. KEYWAY)	"L" 4 LOCKED OUT OF EXTREME POS. (KEYWAY SIDE)	"M" 4 LOCKED OUT OF AND INTO EXTREME POS. (OPP. KEYWAY)	"N" 4 LOCKED OUT OF EXTREME POS. (OPP. KEYWAY)

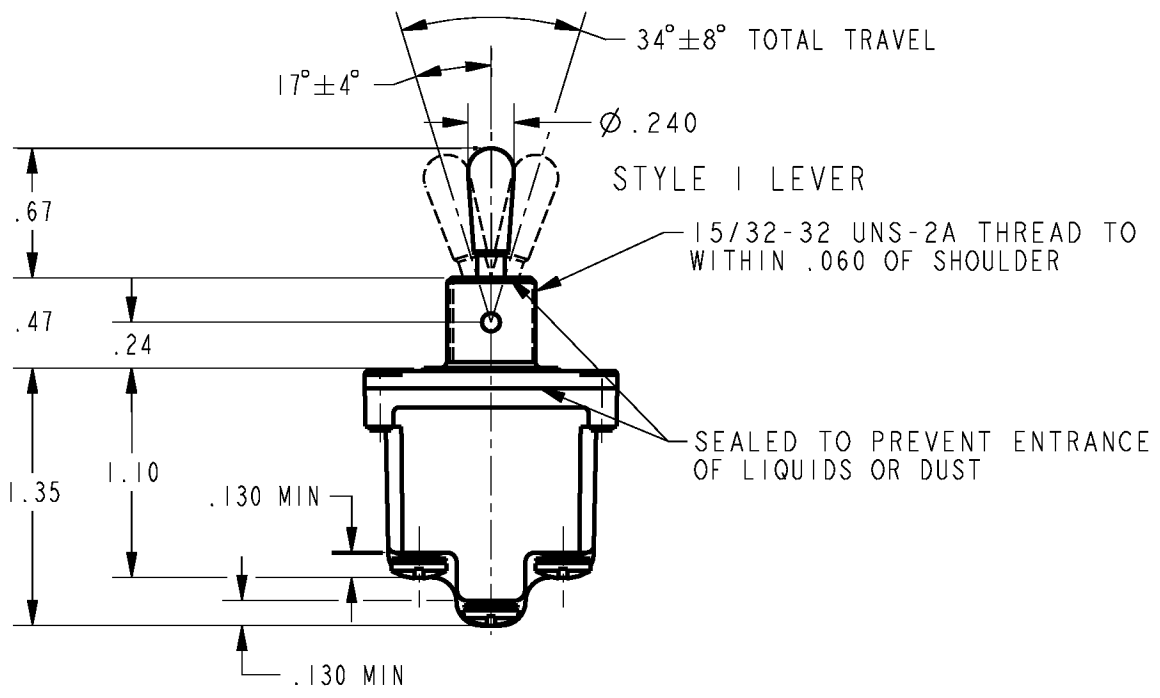

CIRCUIT MADE WITH TOGGLE LEVER IN	KEYWAY SIDE	CENTER	OPPOSITE KEYWAY
	MOMENTARY POSITION	MAINTAINED POSITION	MAINTAINED POSITION

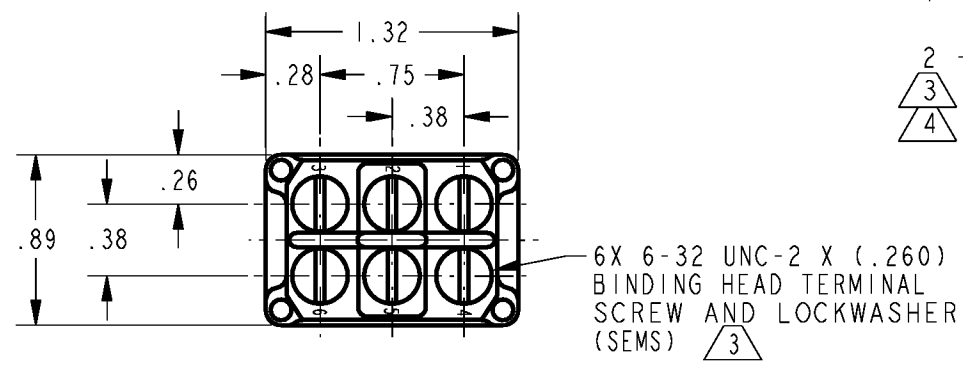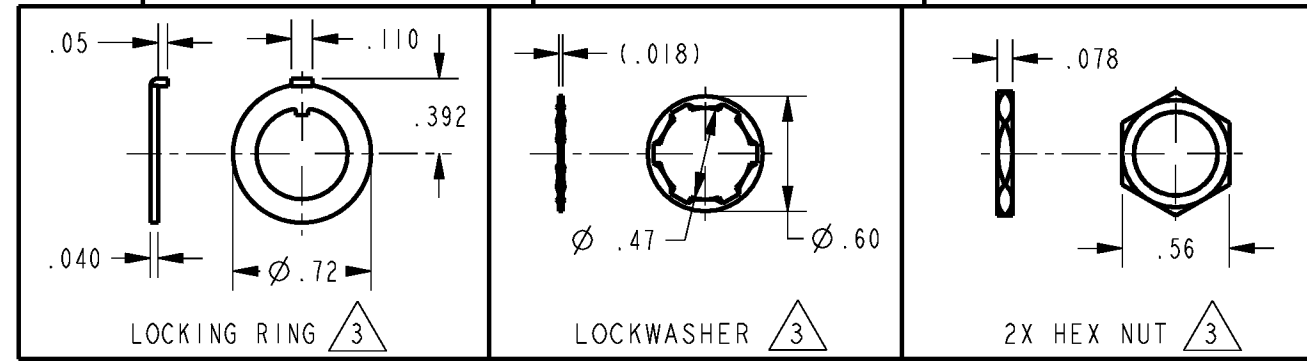

- NOTES
- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
 - 2 - MICRO SWITCH CAT. LIST. MARKED ON SIDE OF SWITCH FURNISHED UNASSEMBLED SUFFIX LETTER MUST BE ADDED FOR DESIRED TYPE OF TOGGLE LOCKING. SEE CHART FOR AVAILABLE LOCKING COMBINATIONS

ELECTRICAL RATING	
L192	10A 125, 250, 277 VAC
	1/4HP 125 VAC
	1/2HP 250, 277 VAC
	3A 125 VAC "L"



THIRD ANGLE PROJECTION	
SCALE	FULL
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE	(.0) ±.030
TWO PLACE	(.00) ±.015
THREE PLACE	(.000) ±.005
ANGLES	±
WEIGHT	.12 LBS APPROX