


RECOMMEND P.C.B. LAYOUT






CIRCUIT: 3PDT

CONTACT CONFIGURATION

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
DN	NONE	DN
2-3-5-6	OPEN	2-1-5-4
8-9		8-7

NOTES:

1. ALL DIMENSIONS IN MM
2. TERMINAL NUMBERS FOR REF ONLY
3. PLATING MATERIAL, SILVER
4. RATING: 2A @250VAC, 5A @120VAC DR 28VDC
5. ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES AT FULL LOAD
6. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
7. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
8. OPERATING TEMP:-30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.

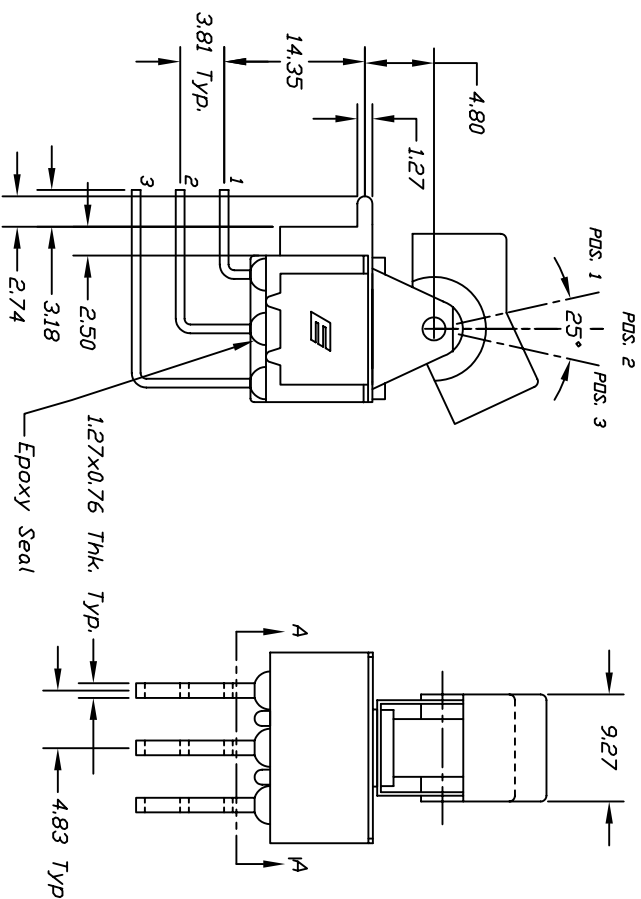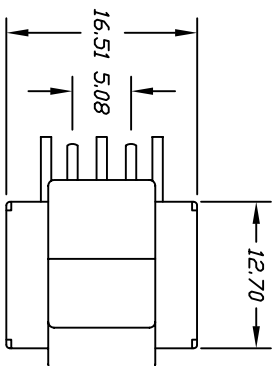

REV.	ECN NO.	DESCRIPTION	DATE	CHKD
A		RELEASED FOR PRODUCTION	8/5/05	PV
B	15140	REVISED/ADD NOTES 4-10		

TOLERANCES		TITLE	
0.0	±0.4	SCALE	2:1
0.00	±0.25	DATE	6/1/98
		DR	MM
		DWG	T331006
		REV	B

E-SWITCH®

300 3P1 J1 M7 Q E