


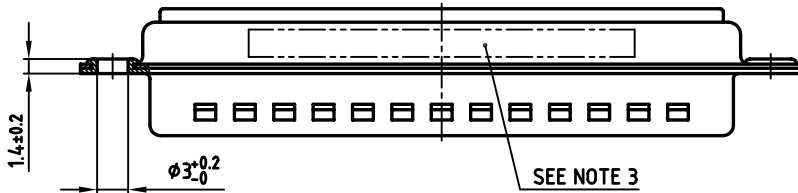
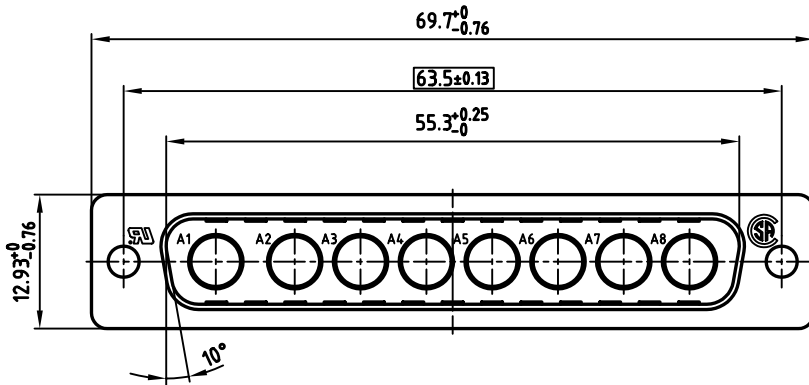


used for: D-SUB COMBINATION

5:1

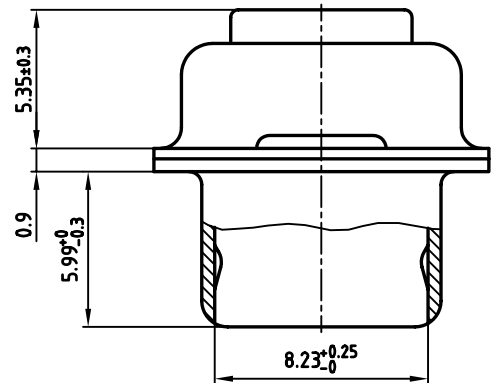

NOTES:

1. METAL SHELLS: STEEL; TIN PLATED
2. INSULATORS: PBTP/GF UL 94 V-0; BLACK
3. CONNECTOR IS PART MARKED: PART NO: CONEC Y/WW
4. = CRITICAL DIMENSION

Directive 2002/95/EC
RoHS
Compliant

APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance		 dim. in mm
1997	date	
drawn	29.07.	name
appd.	29.07.	Mickenbecker
norm		
d-old		

CONEC

scale:	2:1 (5:1)
material:	SEE NOTES
title:	
D-SUB COMBINATION MALE	
8W8P	
dwg no:	AutoCAD/REL.13 DIN-A
16K11BLA	
sh: 1/1	
part no: 3008W8PXX99A10X	