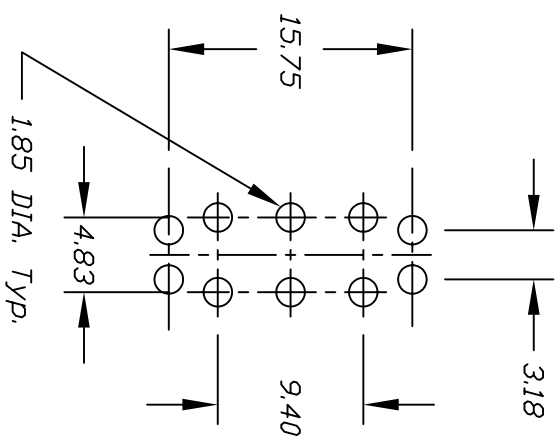
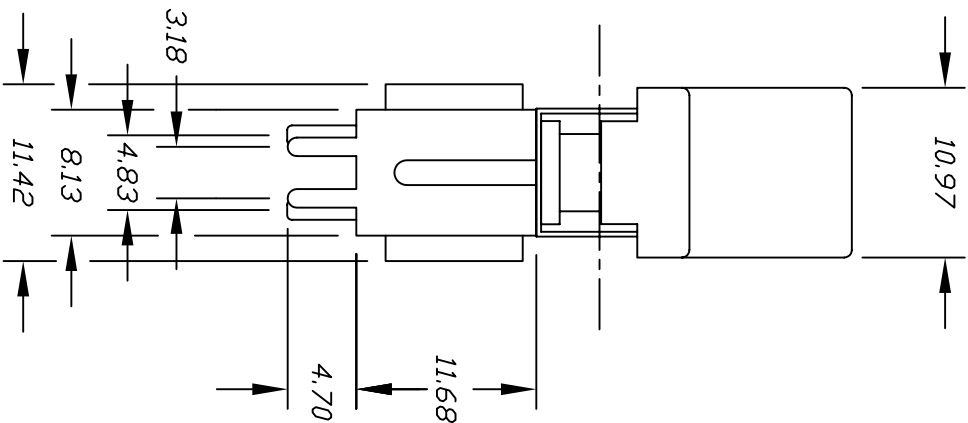
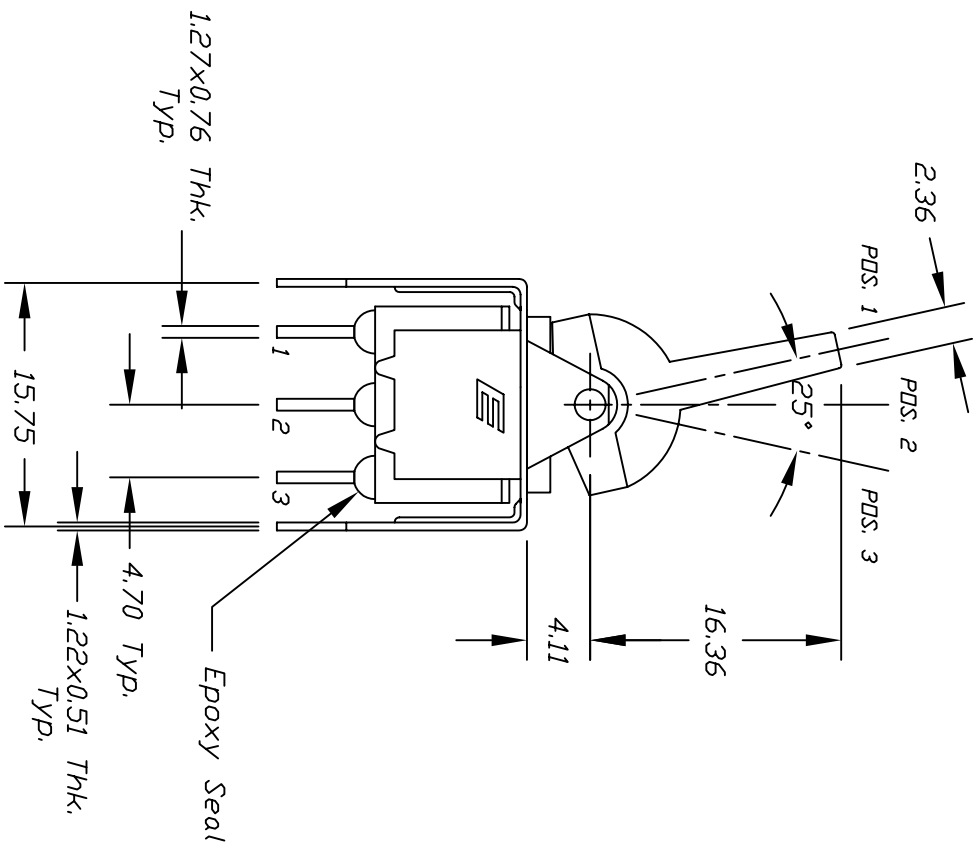



CONTACT CONFIGURATION

SWITCH FUNCTION			
POS. 1	POS. 2	POS. 3	
DN	NONE	DN	
2-3,5-6	OPEN	2-1,5-4	

NOTES:

1. ALL DIMENSIONS IN MM
2. TERM. NOS. FOR REF ONLY
3. RATING: 0.4 (VA) Max. @20V Max. (AC or DC)

2. IERM. NLS. FLUR RELY UNLY							
3. RATING: 0.4 (VA) Max. @20V Max. (AC or DC)							
A	RELEASED FOR PRODUCTION						
REV.	DESCRIPTION	DATE	CHKD				
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED							
TOLERANCES							
0.0		±0.4					
0.00		±0.25					
TITLE							
300 DP-1 J6 (BLK.) V52 R E							
SCALE	DATE	DR	DWG	REV			
2:1	8/20/98	MM	T321042	A			