

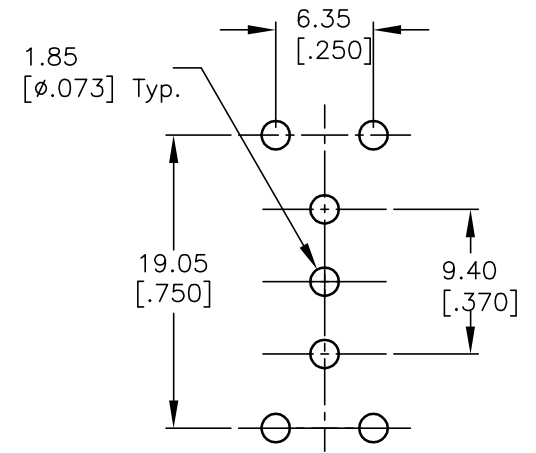
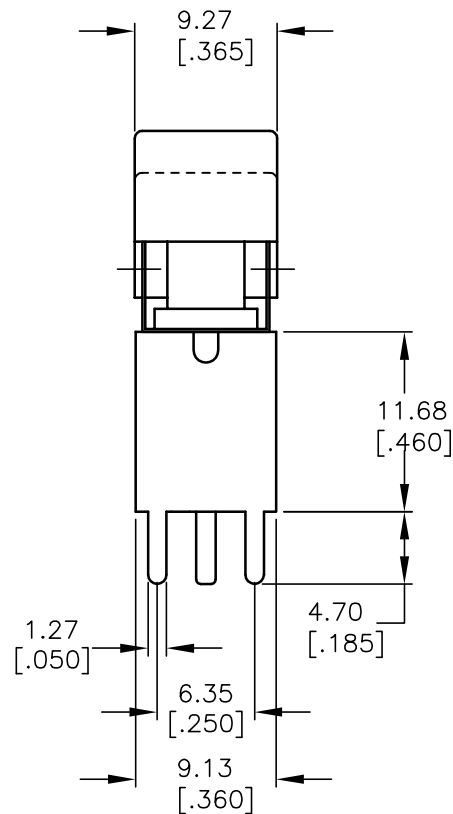


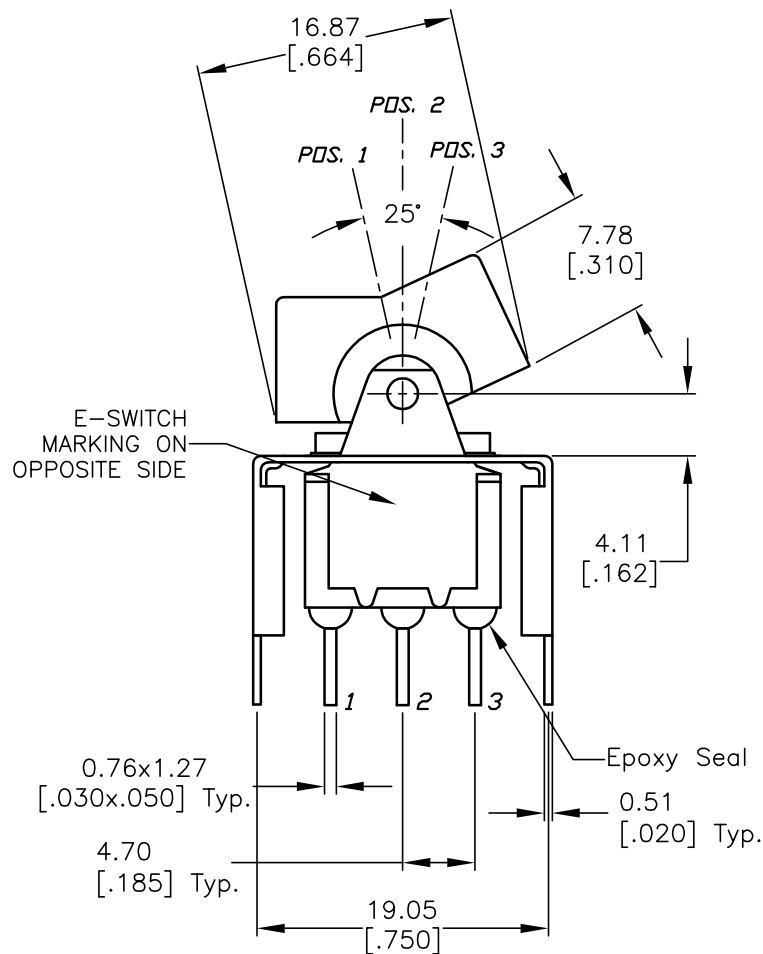

RECOMMEND P.C.B. LAYOUT



CIRCUIT: SPDT

CONTACT CONFIGURATION

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
ON	NONE	ON
2-3	OPEN	2-1

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: 0.0=±0.4
0.00=±0.25
- TERM. NOS. FOR REF. ONLY
- CONTACT RATING: 5A, @120VAC or 28VDC; 2A, @250VAC.
- ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
- INSULATION RESISTANCE: 1,000 M Ohms min.
- DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
- OPERATING TEMP.: -30°C to 85°C
- FIXED TERMINAL & MOVING CONTACT: Silver plated copper alloy

E-SWITCH®

TITLE

300 SP-1 J1 (Wht.) VS4 Q E

SCALE

2:1

DATE

12/28/99

DR

MM

DWG

T311032

REV

A

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

A	10482	RELEASED FOR PRODUCTION		
REV.	ECN No.	DESCRIPTION	DATE	CHKD