

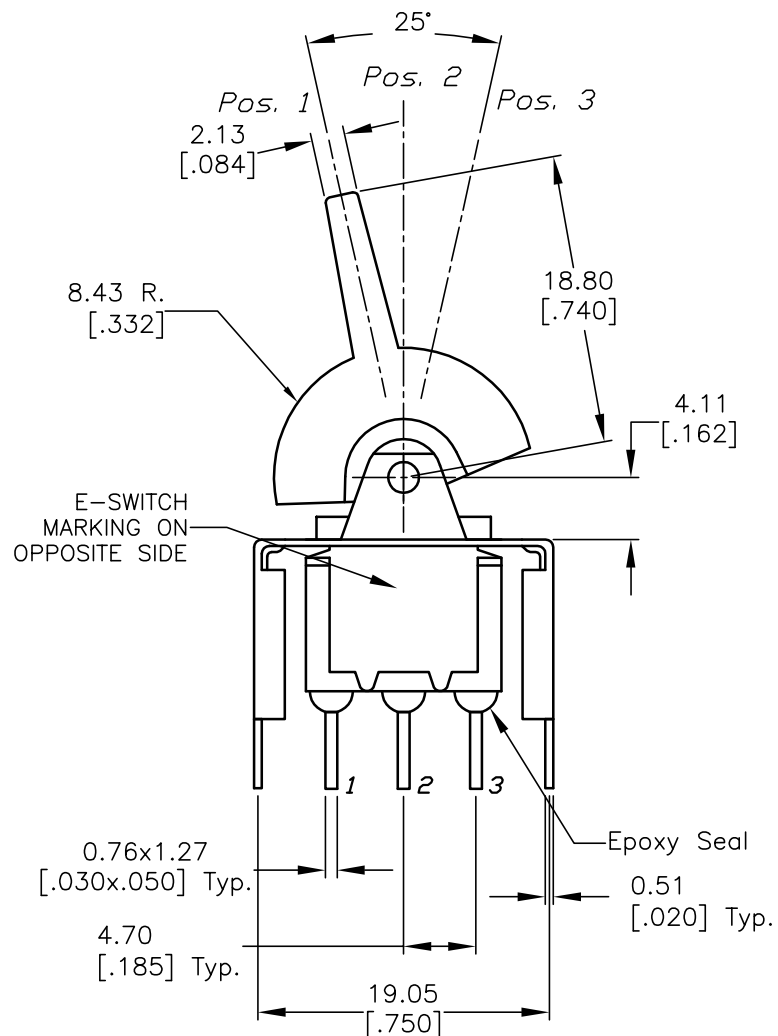


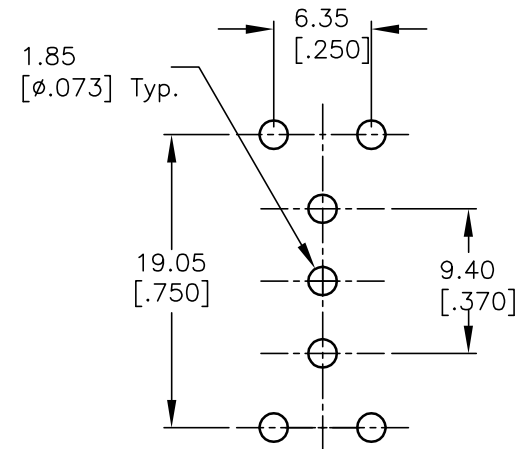


## NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE:  $0.0 \pm 0.4$   
 $0.00 \pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 5A, @120VAC or 28VDC; 2A, @250VAC.
5. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
6. INSULATION RESISTANCE: 1,000 M Ohms min.
7. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
8. OPERATING TEMP.: -30°C to 85°C

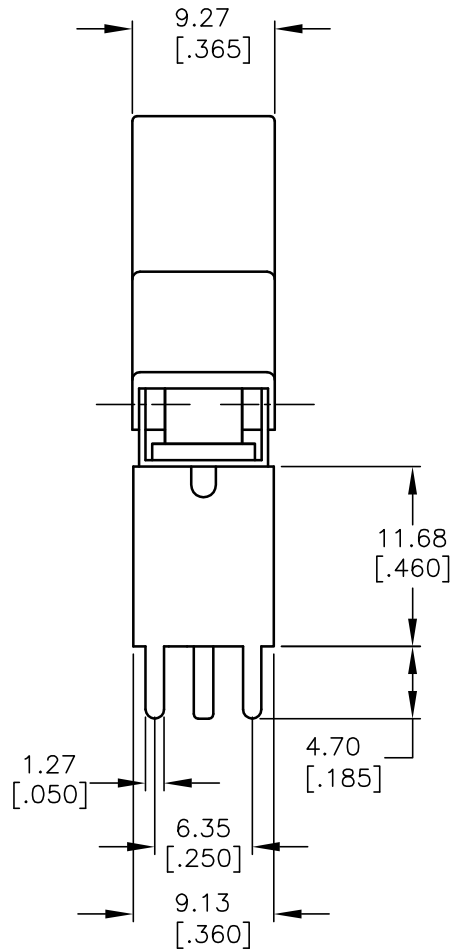

RECOMMEND P.C.B. LAYOUT



CIRCUIT: SPDT

CONTACT CONFIGURATION

| SWITCH FUNCTION |        |        |
|-----------------|--------|--------|
| POS. 1          | POS. 2 | POS. 3 |
| <ON>            | OFF    | <ON>   |
| 2-3             | OPEN   | 2-1    |



(&lt;)=Momentary

**E-SWITCH®**

TITLE

300SP4J2BLKVS4QE

SCALE

2:1

DATE

4/14/00

DR

MM

DWG

T314015

REV

B

THE INFORMATION CONTAINED IN THIS DOCUMENT  
IS PROPRIETARY TO E-SWITCH AND IS  
NOT TO BE COPIED OR TRANSFERRED

|      |         |                         |          |      |
|------|---------|-------------------------|----------|------|
| B    | 14542   | CORRECT SWITCH FUNCTION | 11/28/04 | AR   |
| A    | 10604   | RELEASED FOR PRODUCTION | 4/14/00  | MM   |
| REV. | ECN No. | DESCRIPTION             | DATE     | CHKD |