
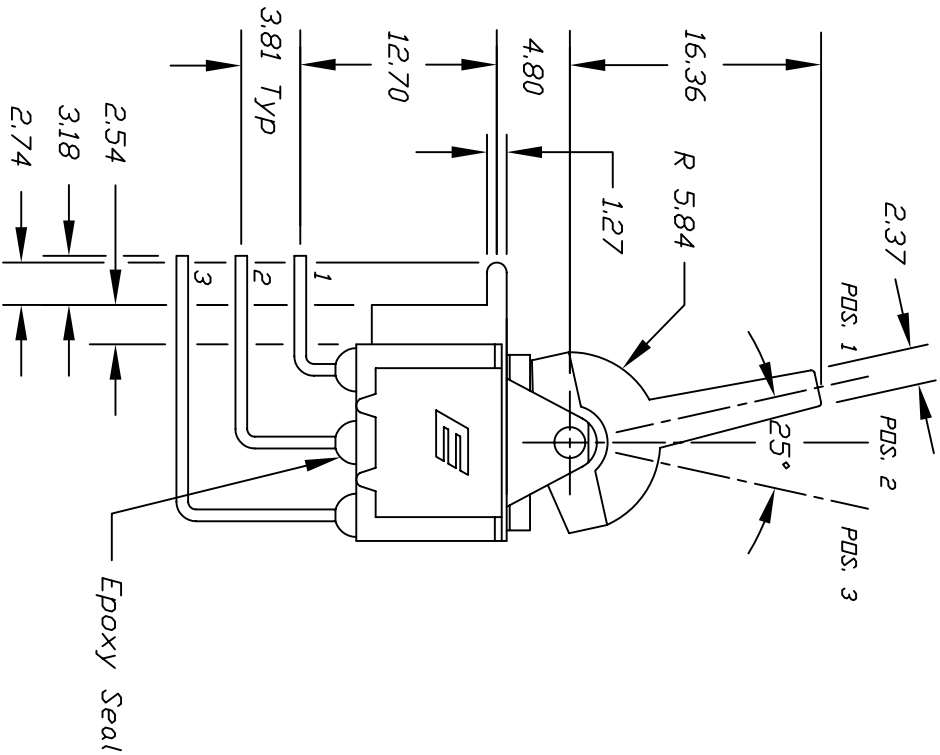


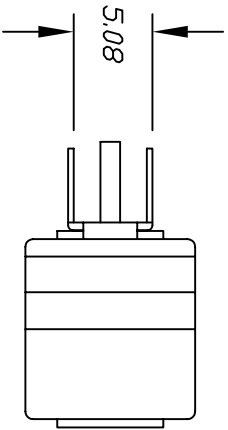



NOTES:

- 1. ALL DIMENSIONS IN MM
- 2. TERM. NOS. FOR REF. ONLY
- 3. RATING: 5A @120VAC OR 28VDC; 2A @250VAC.


REV.	DESCRIPTION	DATE	CHKD
A	RELEASED FOR PRODUCTION		
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			

TOLERANCES	
0.0	±0.4
0.00	±0.25

TITLE			
300 SP-4 J6 M7 Q E			
SCALE	DATE	DR	DWG
2:1	12/3/97	MM	T314001
REV			A

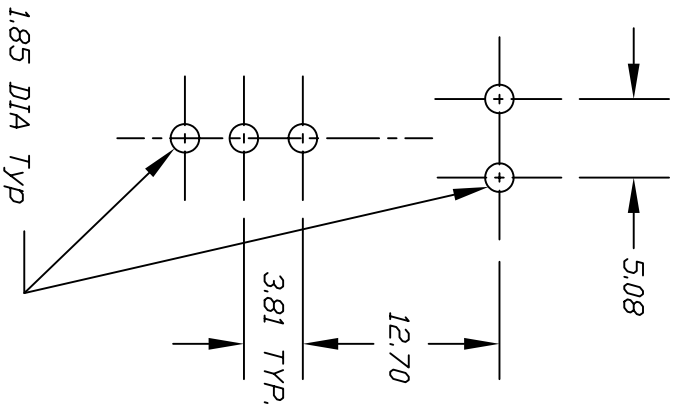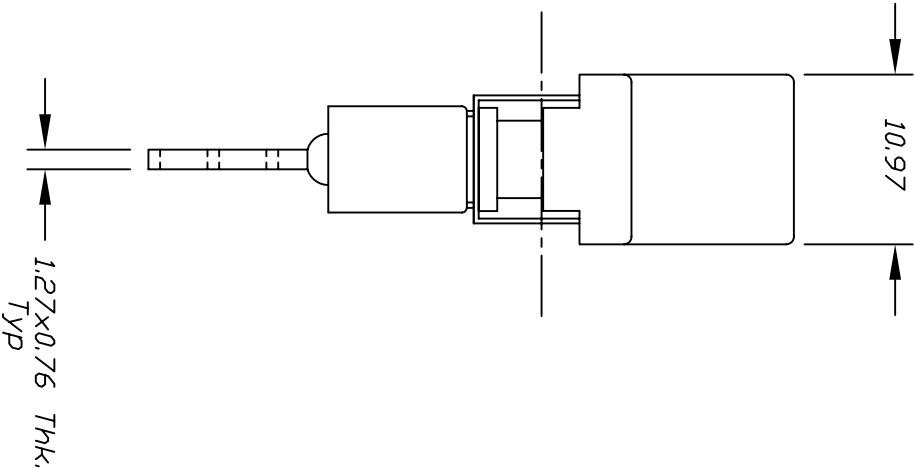

RECOMMEND P.C.B. LAYOUT



CIRCUIT: SPDT

CONTACT CONFIGURATION

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
<DN>	OFF	<DN>
2-3	OPEN	2-1

()=Momentary

E-SWITCH®