
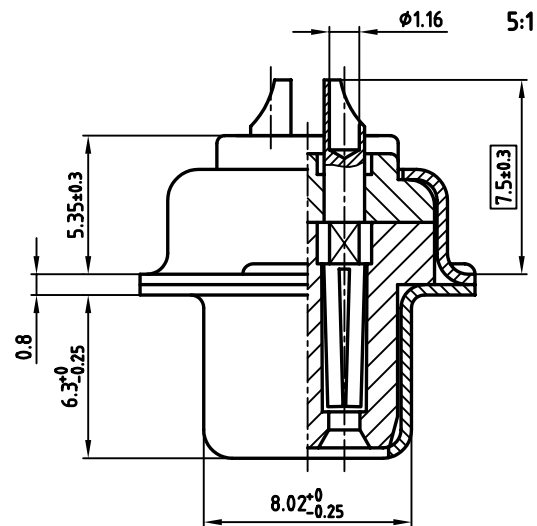
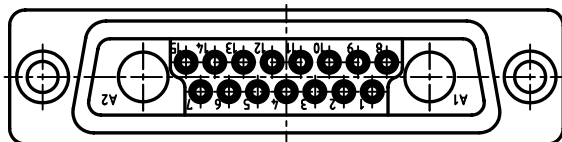
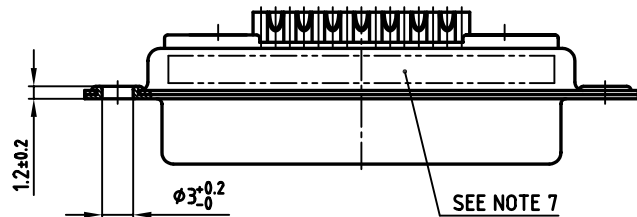


PART-NO.	CFM PART-NO.
3017W2SCM99A10X	CFMP17W2S-K121

NOTES:

- METALSHELLS: STEEL; min. 320µ" TIN
- INSULATORS: PBT GF UL 94 V-0, GREEN
- SIGNAL CONTACTS: COPPER ALLOY
- PLATING: min. 30µ" HARD GOLD OVER min. 50µ" NICKEL
- SOLDER CUP ACCEPTS CABLE AWG 20
- NO CONTACTS ON POS A1 + A2
- CONNECTOR IS PART MARKED: PART NO: CONEC Y/WW
- = CRITICAL DIMENSION: SPC

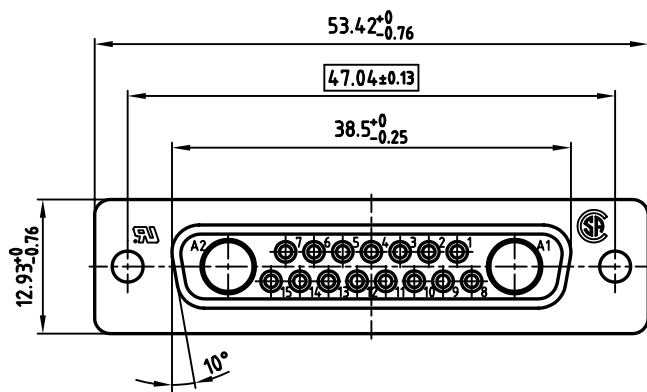

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
2002	date		name
drawn	02.08.		Schmidt
appd.	02.08.		E. Mickenbecker
norm			
d-old			

tolerance	scale:
	2:1 (5:1)
	material: SEE NOTES
	title: D-SUB COMBINATION FEMALE 17W2S SOLDER CUP
	dwg no: AutoCAD 2000 DIN-A 3 sh: 1/1
	part no: SEE TABLE

