
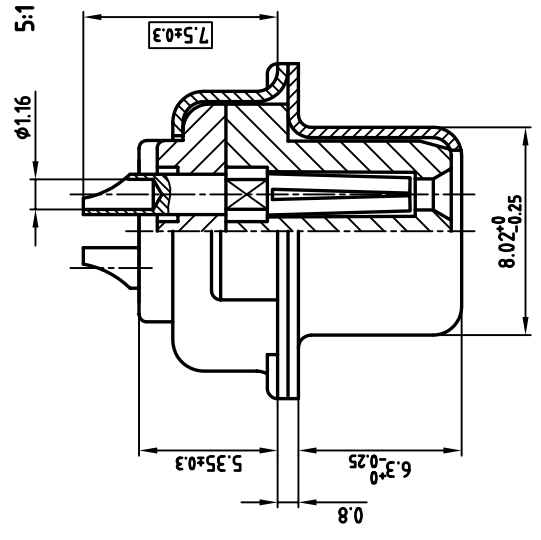

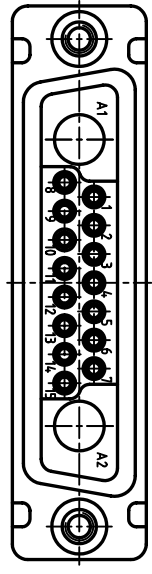
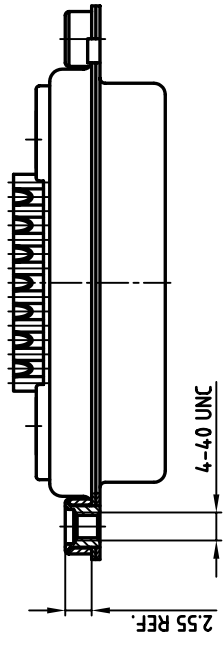


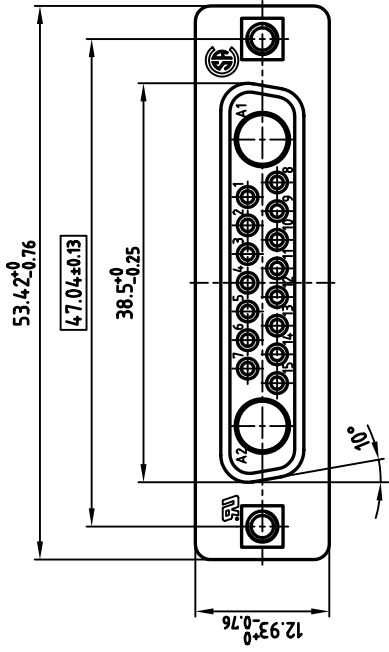

NOTES:

1. METAL SHELLS: STEEL; min. 320µ" TIN
2. INSULATORS: PBT GF UL 94 V-0, GREEN
3. SIGNAL CONTACTS: COPPER ALLOY
4. PLATING: min. 30µ" HARD GOLD OVER min. 50µ" NICKEL
5. SOLDER CUP ACCEPTS CABLE AWG 20
6. NO CONTACTS ON POS A1 + A2
7. THREADED INSERT: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
8. COLLAR: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
9. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
10. = CRITICAL DIMENSION: SPC

Directive 2002/95/EC
RoHS
Compliant

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GMBH
DO NOT ALTER CAD DRAWING BY HAND

tolerance		scale:	
		2:1 (5:1)	
material:		SEE NOTES	
title:		D-SUB COMBINATION FEMALE	
name		17W2S SOLDER CUP	
date		with threaded insert	
2001	06.12.	E. Mickenbecker	
drawn	07.12.	norm	
appd.		d-old	
rev.			
CONEC®		AutoCAD 2000	
dwg no:		13K1A427A	
part no:		3017W2SCM99A30X	

used for: D-SUB COMBINATION