
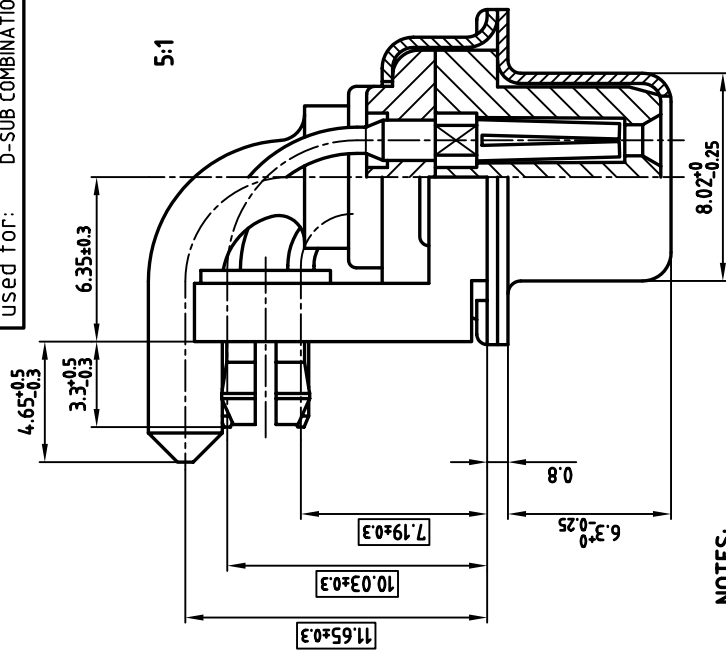

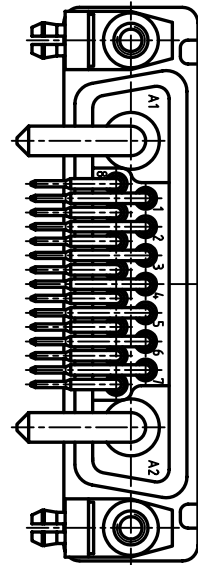
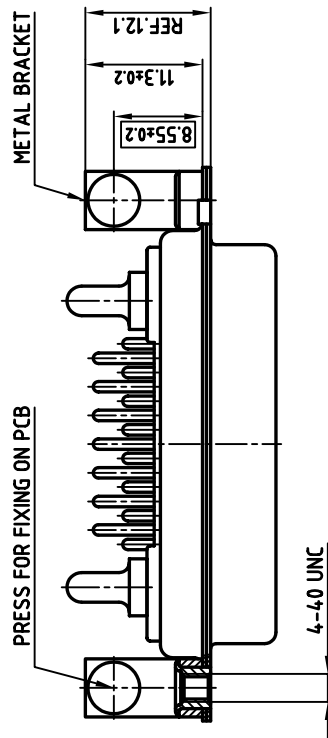


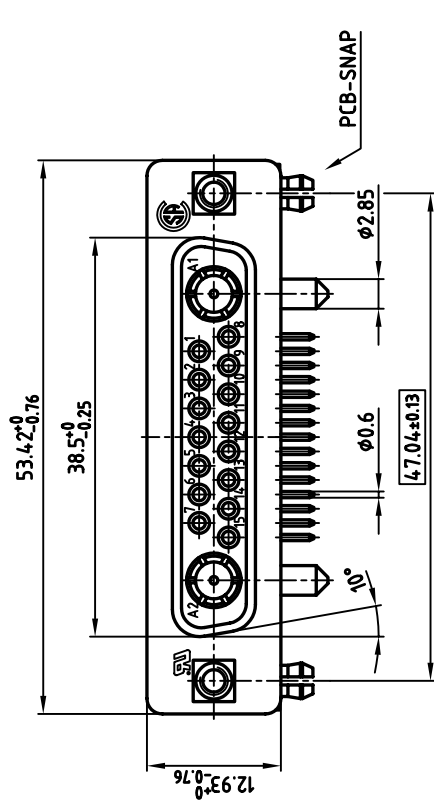

NOTES:

1. METAL SHELLS: STEEL; min. 320μ" TIN
2. INSULATORS: PBT GF UL 94 V-0, GREEN
3. SIGNAL CONTACTS: COPPER ALLOY
4. PLATING: min. 30μ" HARD GOLD OVER min. 50μ" NICKEL
5. HIGH POWER CONTACTS 20A: COPPER ALLOY
6. PLATING: min. 30μ" HARD GOLD OVER min. 50μ" NICKEL
7. METAL BRACKET: STEEL; min. 320μ" TIN over 80μ" NICKEL
8. THREADED INSERT: COPPER ALLOY; min. 200μ" TIN over 80μ" NICKEL
9. PCB-SNAP: COPPER ALLOY; min. 200μ" TIN over 80μ" NICKEL
PCB-HOLE: $\phi 3.1 \pm 0.1$; PCB THICKNESS 1.6mm
10. P.C.B. HOLE DRILLINGS ON SHEET 2
11. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
12.

--

 = CRITICAL DIMENSION: SPC

Directive 2002/95/EC
"RoHS"
Compliant

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GMBH

		tolerance						
			2001	date	name			
			drawn	22.08.	Parel			
			appd.	22.08.	E. Mickenbecker			
			norm					
			d-old					

D-SUB COMBINATION FEMALE 90°
17W25 0.318inch

dwg no:	AutoCAD 2000	DIN-A
---------	--------------	-------

13K1A320A

part no: 3017W2SCT56N40X