


Customer & part number :
 Toko sample number :

302MXPR-1225G

Dimensions.

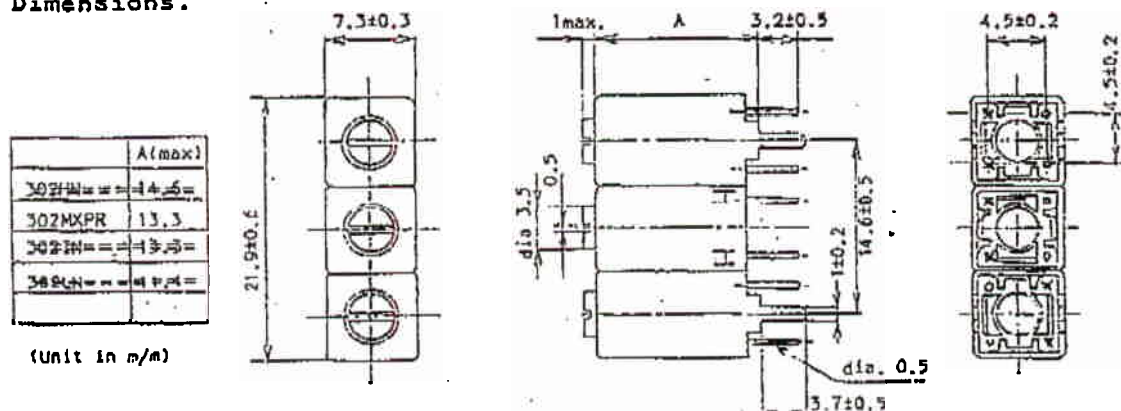


Electrical characteristics.

Center frequency (Fo)	:	510MHz
Bandwidth	:	33MHz min.
- 1 db bandwidth at Fo	:	33MHz min.
Insertion loss at Fo	:	1.5dB max.
Selectivity		
Fo + 50 Mhz	:	9.0dB min.
Fo - 50 Mhz	:	10dB min.
Ripple in pass band	:	1.0dB max.
Input impedance	:	50-ohm
Output impedance	:	50-ohm

Connections.

(Bottom view)

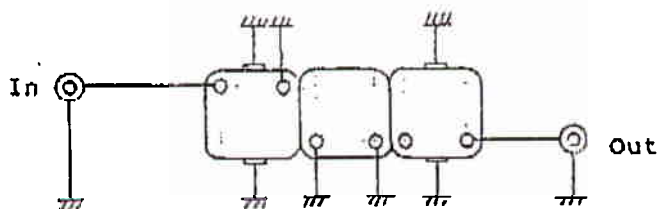

Remarks.

- Please return one copy with your signature when samples are approved under the above specification.

* Modified from 302MN-069G.

Orig	08-MAR-95	1
Issues		Sig
Toko Inc		
1-17, 2-Chome, Higashi-Yukigaya, Ohta-Ku Tokyo		
Fax. 03-728-4697		

Date	Approved by	Made by
Jun 21, 89	H. Ohtuka	H. Saitoh

302MXPR-1225G

89.06.20 13:55

MKR(250):510MHz

A(*):MAGTD

-0.72dB

5dB/


-0.71dB

B(*):B

-0.70dB

1dB/

0.00dB

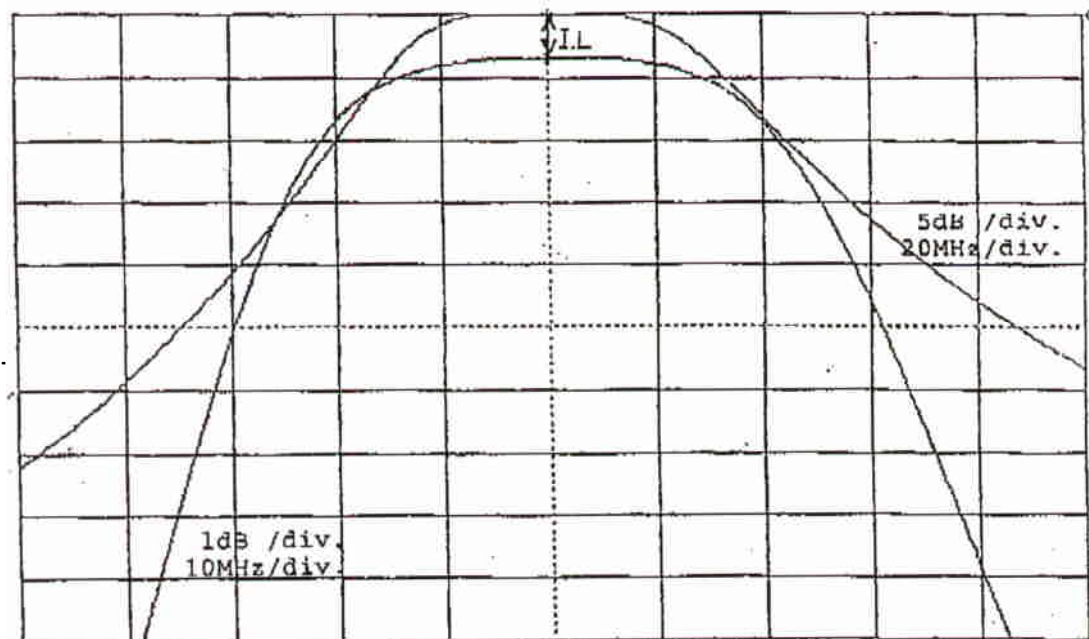

CF:510MHz

OUT(B):0.00dBm

ST:3.90sec

SPAN:200MHz

EL:0.00um

IRG(R):0dBm

IRG(T):0dBm

RBW:10kHz


VBW:10kHz

50 Ω

MAGTD

OFFSET TOP

TEST CIRCUIT

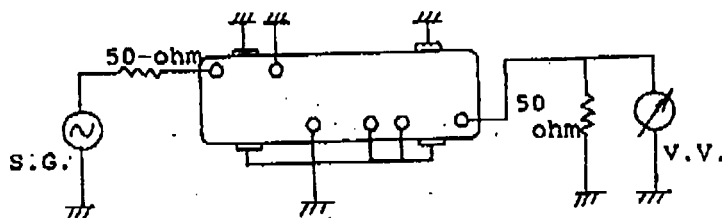

(Bottom View)