

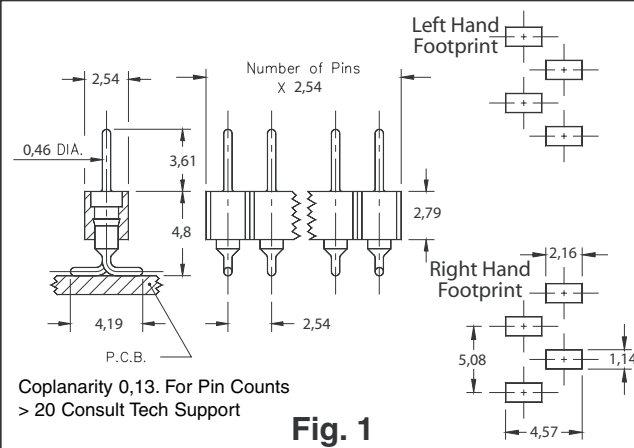


Fig. 1

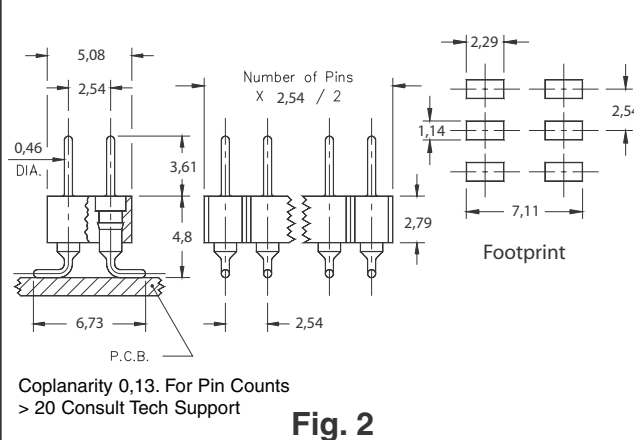


Fig. 2

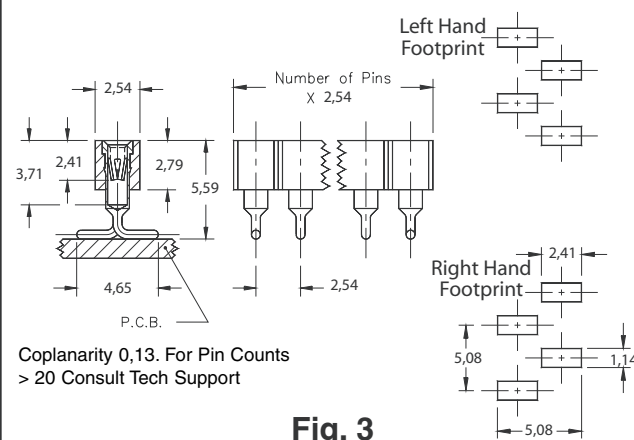


Fig. 3


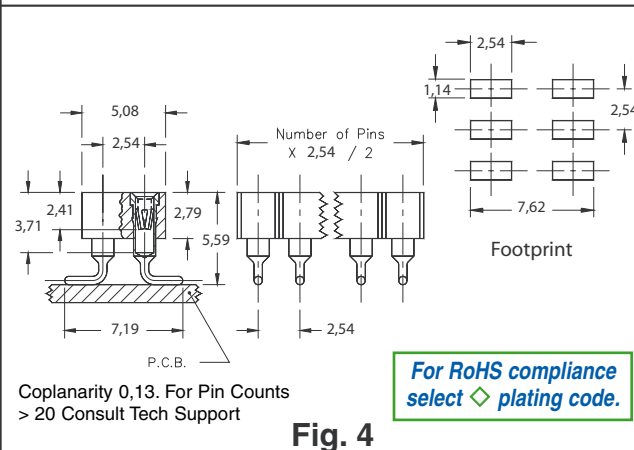


Fig. 4

*For RoHS compliance
select ◇ plating code.*

- Headers (350 & 450) use MM# 3404 pins. See page 170 for details.
- Sockets (310 & 410) use MM# 1005 receptacles and accept pin diameters from 0,36-0,64. See page 135 for details.

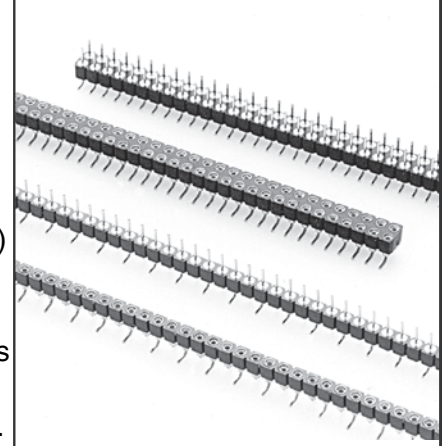

- Coplanarity 0,13 (Single Row max 10 pins; Double Row max 20 pins) for higher pin counts contact tech support.
- Insulators are high temp. thermoplastic.



Ordering Information

Fig. 1L	Single Row Header, Left Hand Footprint Odd or Even # of pins			
	350-XX-1 _ -00-106000 Specify # of pins → 02-64			
Fig. 1R	Single Row Header, Right Hand Footprint Even # of pins			
	350-XX-1 _ -00-107000 Specify even # of pins → 02-64			
Fig. 2	Double Row Header, Even # of pins			
	450-XX-2 _ -00-106000 Specify even # of pins → 02-72			
SPECIFY PLATING CODE XX=		10◇	90	40◇
Pin Plating		0,25µm Au	5,08µm Sn/Pb	5,08µm Sn
Fig. 3L	Single Row Socket, Left Hand Footprint Odd or Even # of pins			
	310-XX-1 _ -41-105000 Specify # of pins → 02-64			
Fig. 3R	Single Row Socket, Right Hand Footprint Even # of pins			
	310-XX-1 _ -41-107000 Specify even # of pins → 02-64			
Fig. 4	Double Row Socket, Even # of pins			
	410-XX-2 _ -41-105000 Specify even # of pins → 02-72			
SPECIFY PLATING CODE XX=				43◇
Sleeve (Pin)				5,08µm Sn
Contact (Clip)				0,76µm Au