


HONEYWELL
PART NUMBER

311SM6-T

PRODUCT CODE

TZA1350

REV	DOCUMENT	CHANGED BY	CHECK
6	0038444	KVS 09APR08	ASD

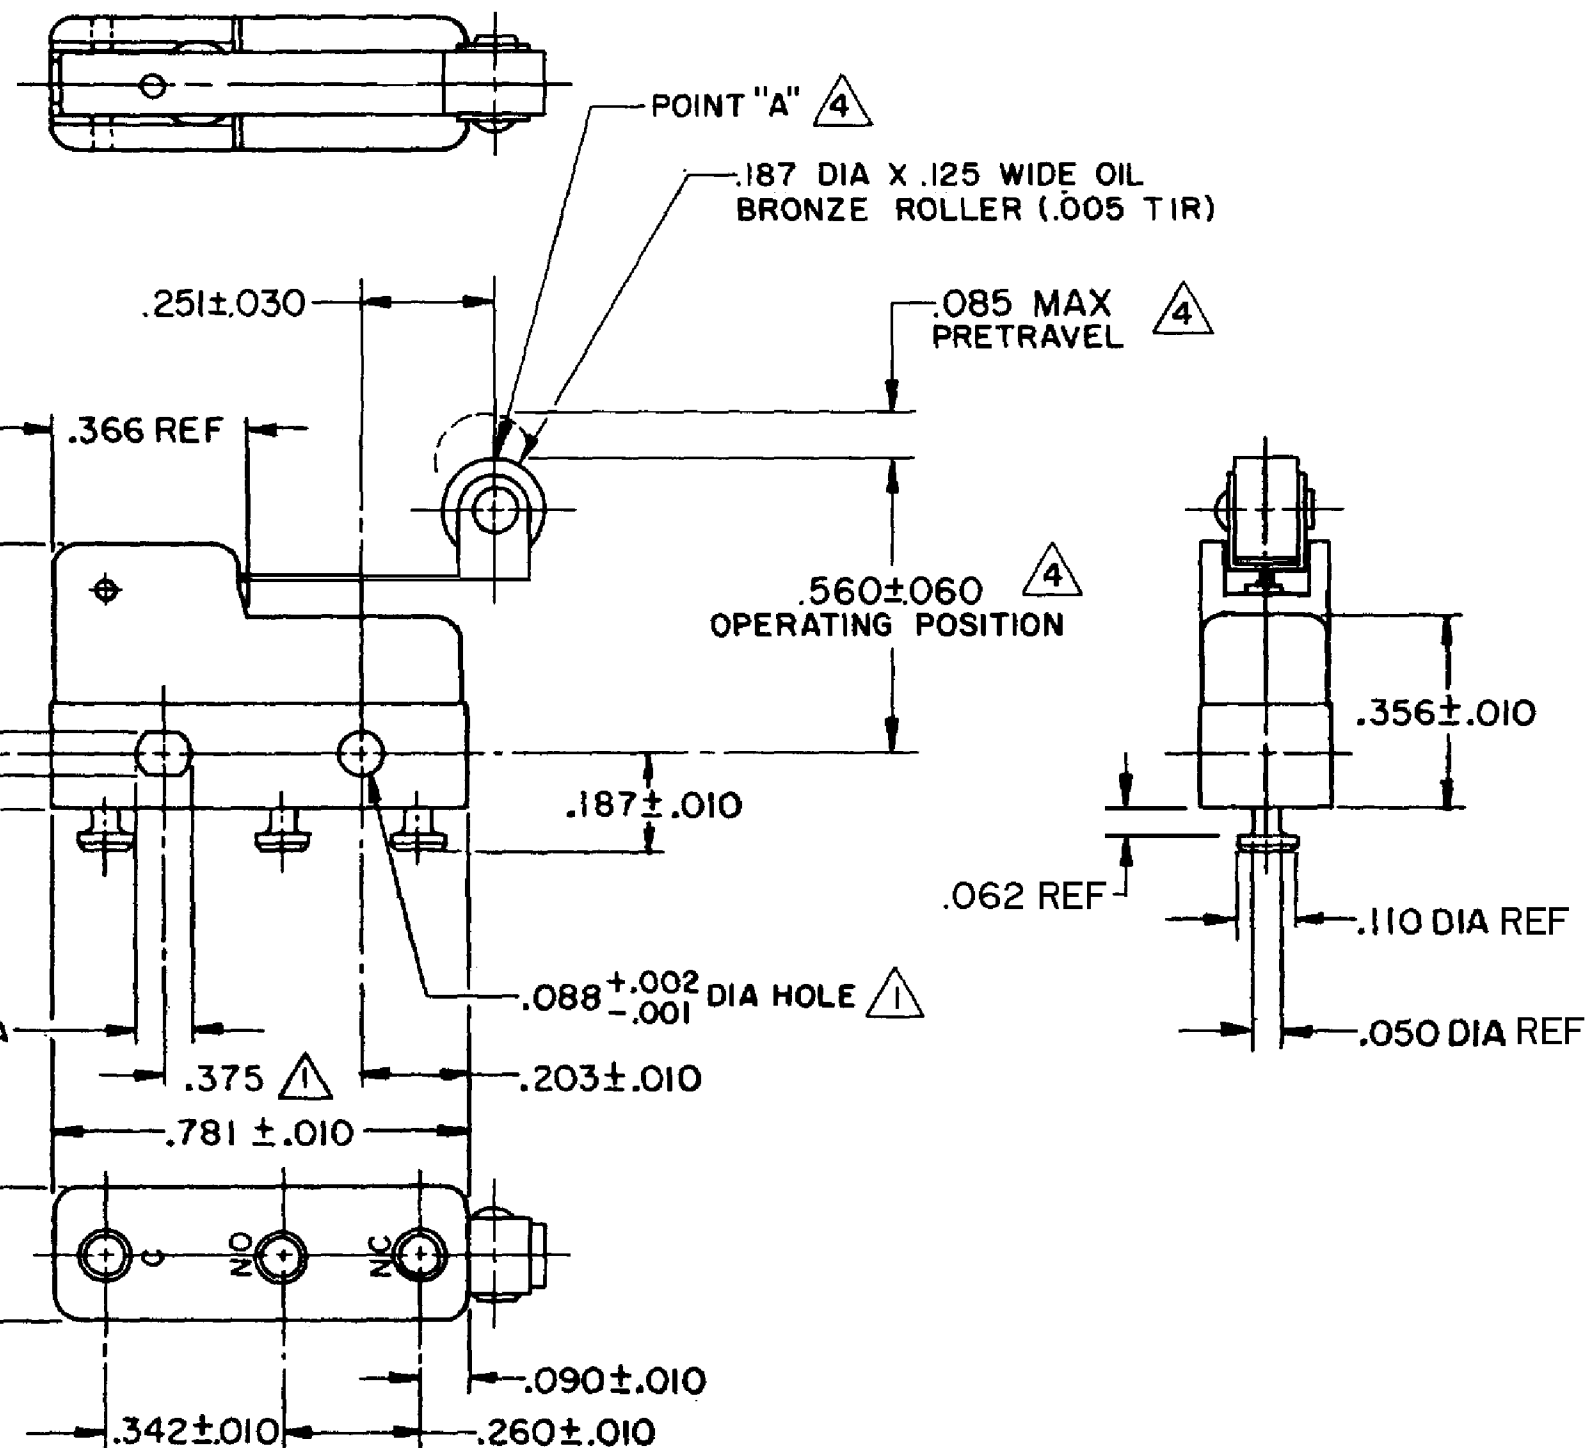

NOTE -

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
- 2- SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
- 3- TERMINALS ARE PLATED FOR SOLDERING
- 4 CHARACTERISTICS TAKEN AT POINT "A"

RELEASE NO. SR-11750

REPLACES -

CHARACTERISTICS 4

OPERATING FORCE -- 40 GRAM MAX

RELEASE FORCE -- 7 GRAM MIN

DIFFERENTIAL TRAVEL -- .019 MAX

OVERTRAVEL -- .018 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

30 VOLTS DC RATING

	SEA LEVEL	50,000 FT
INDUCTIVE	3 AMP	2.5 AMP
RESISTIVE	5 AMP	5 AMP

MAXIMUM INRUSH 24 AMP

APPROVALS	UL, CSA	5A, 250 VAC ~	UL	SP	BRAND	L4
-----------	---------	---------------	----	----	-------	----

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE	X	±
ONE PLACE	.X	±
TWO PLACE	.XX	±
THREE PLACE	.XXX	±
FOUR PLACE	.XXXX	±
ANGLES		±

THIRD ANGLE PROJECTION



DRAWN	VK	20FEB 08
CHECK	RJ	20FEB 08
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		

RASTER

Honeywell

TITLE

SWITCH - BASIC

SIZE	TYPE	DRAWING NAME	REV
B	I	311SM6-T	6
SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1