


REV.	DATE	DESCRIPTION
A	05/21/02	MODIFY PART DESCRIPTION

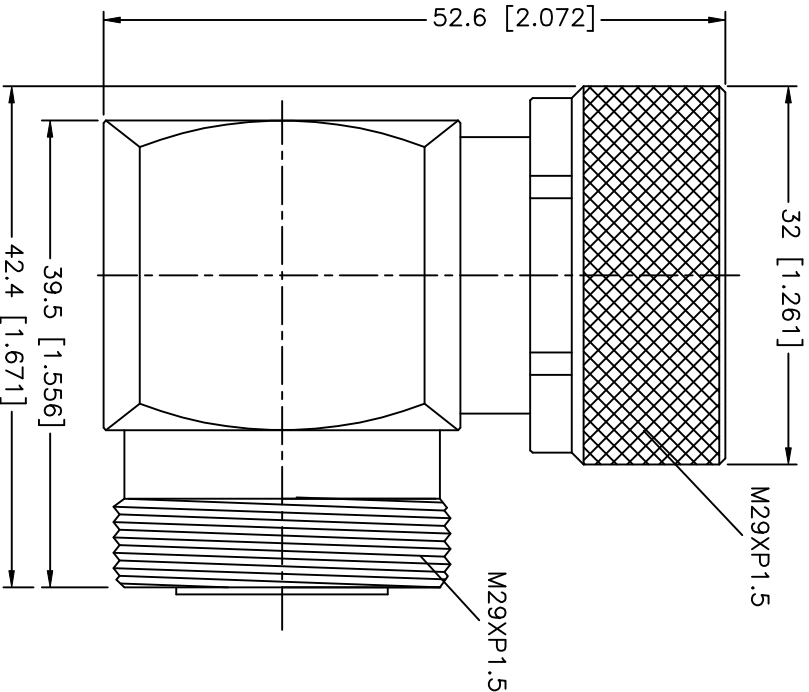

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
 2. SILVER PL. 120 MIN. THICK OVER COPPER STRIKE.
 3. BERYLLIUM COPPER PER QQ-C-530.
 4. SILVER PL. 200 MIN. THICK OVER COPPER STRIKE.
 5. TEFLON MIL-P-19468

						Amphenol - Connex CONNECTOR CORPORATION TITLE 7/16 RIGHT ANGLE PLUG/ JACK ADAPTOR																
8																UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS		APPROVALS		DATE		
7																DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY		DRAWN	G.R.S.	05/21/02		
6																		CHECKED				
5																		ISSUED				
4																						
3	CONTACT PIN	BER. COPPER		SILVER												UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .XXX = ± 0.005" .XX = ± 0.010" .X = ± 0.020"						
2	INSULATOR	TEFLON		NATURAL																		
1	BODY	BRASS		SILVER																		
DESCRIPTION					MATERIAL											FINISH	DO NOT SCALE DRAWING					