


HONEYWELL
PART NUMBER

313SX2-T

PRODUCT CODE
VDT0050

REV	DOCUMENT	CHANGED BY	CHECK
12	0038558	SS 08MAY08	BLR

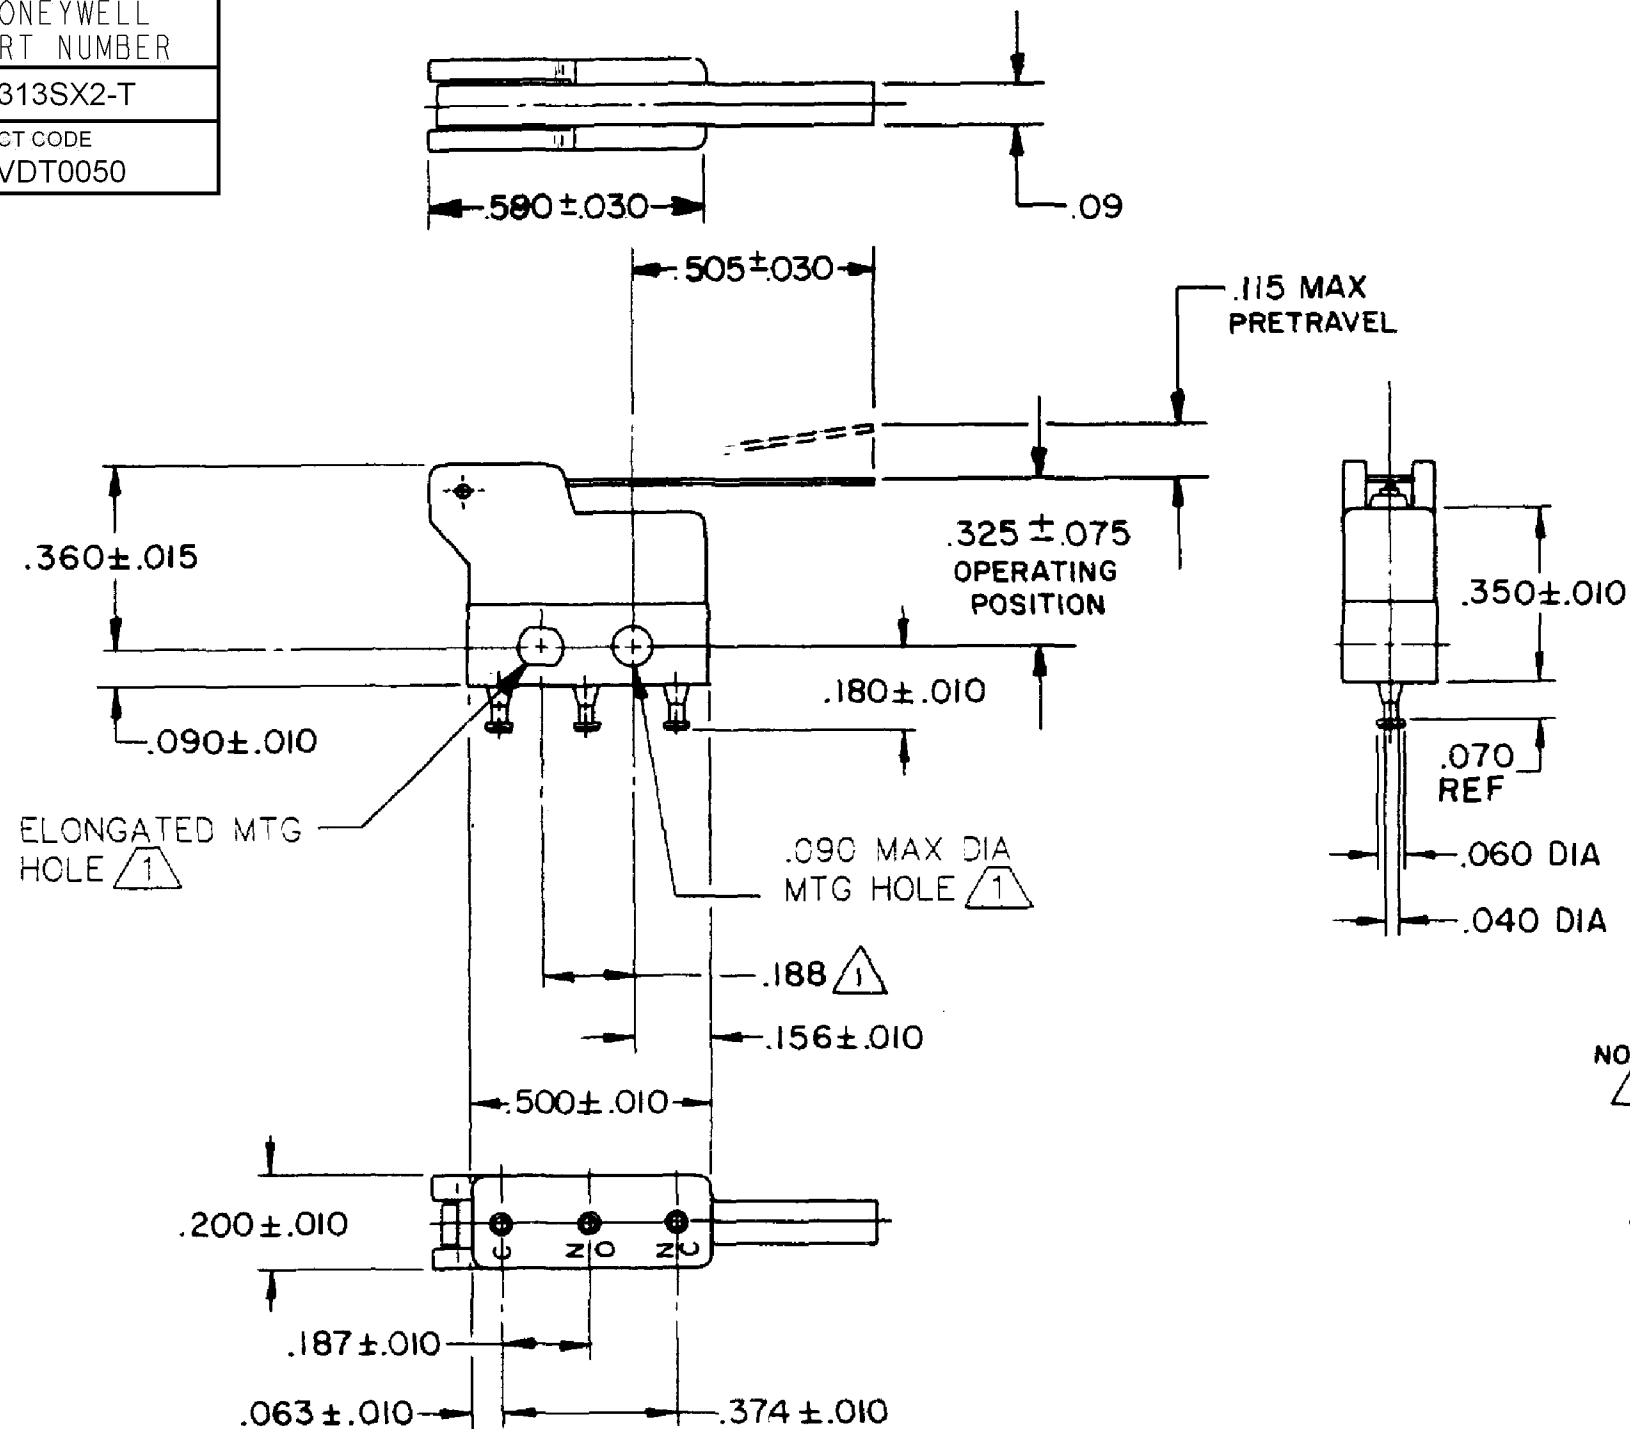

NOTE -

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON $.188 \pm .002$ CENTERS
- 2 - TERMINALS ARE SOLDER DIPPED WITH RoHS-COMPLIANT TIN/COPPER/SILVER SOLDER.
- 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F
- 4 - MOVABLE CONTACT MATERIAL - 24 SOLID GOLD OVERLAY
- 5 - STATIONARY CONTACT MATERIAL - GOLD ALLOY

RELEASE NO.
PR-3162

REPLACES

CHARACTERISTICS

OPERATING FORCE ----- 30 GRAMS MAX

RELEASE FORCE ----- 5 GRAMS MIN

DIFFERENTIAL TRAVEL --- .035 MAX

OVERTRAVEL ----- .025 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

30 VOLTS DC RATING

	SEA LEVEL	50,000 FT
INDUCTIVE	0.5 AMP	0.5 AMP
RESISTIVE	1 AMP	1 AMP

MAXIMUM INRUSH 2 AMP

APPROVALS	KEMA, CE	1A 250 V ~ T125 25E3	CE
	UL, CSA	1A 125 VAC	UL

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE	X	±
ONE PLACE	.X	±
TWO PLACE	.XX	±
THREE PLACE	.XXX	±
FOUR PLACE	.XXXX	±
ANGLES		±

THIRD ANGLE PROJECTION



DRAWN	SPK	27FEB08
CHECK	RJ	27FEB08

THIS DRAWING COVERS A PROPRIETARY ITEM
AND IS THE PROPERTY OF HONEYWELL.
THIS DRAWING IS NOT TO BE COPIED OR USED
WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ANSI Y14.5M-1982
OTHER HONEYWELL ENGINEERING
STANDARDS MAY APPLY

RASTER

Honeywell

TITLE

SWITCH - BASIC

SIZE	TYPE	DRAWING NAME	REV
B	I	313SX2-T	12
SCALE	-	WEIGHT:	SHEET 1 OF 1