
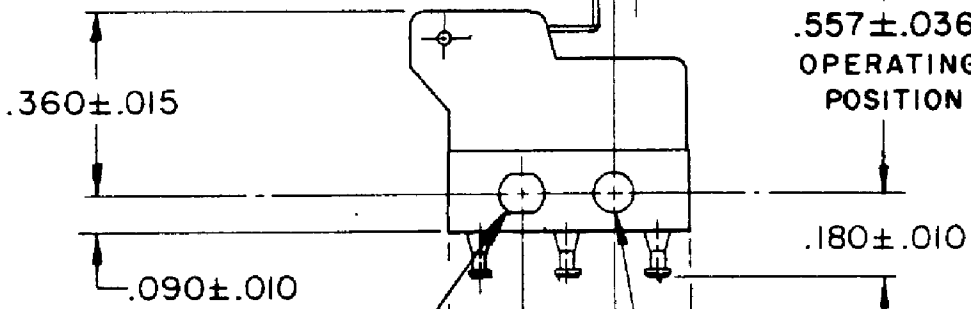
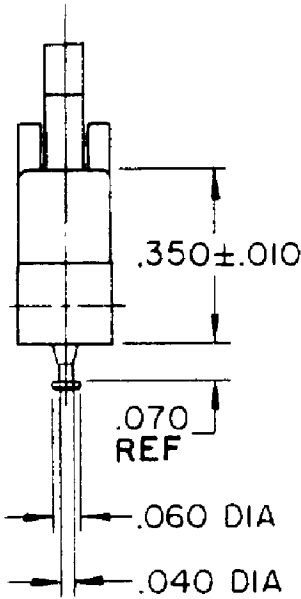




HONEYWELL PART NUMBER
313SX4-T
PRODUCT CODE VDT0060

REV	DOCUMENT	CHANGED BY	CHECK
12	0038558	SS 08MAY08	BLR

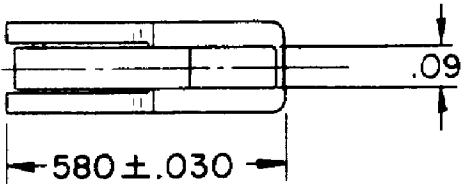

ELONGATED MTG
HOLE (triangle 1)

.090 MAX DIA
MTG HOLE (triangle 1)

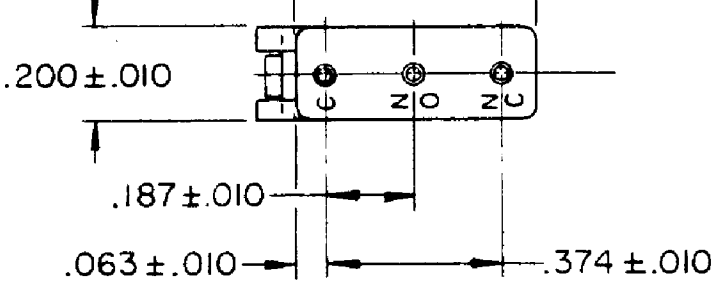

NOTES

- (triangle 1) MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188 ± .002 CENTERS
- 2 - TERMINALS ARE SOLDER DIPPED WITH RoHS-COMPLIANT TIN/COPPER/SILVER SOLDER.
- 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F
- 4 - MOVABLE CONTACT MATERIAL - 24 K SOLID GOLD OVERLAY
- 5 - STATIONARY CONTACT MATERIAL - GOLD ALLOY
- (triangle 6) CHARACTERISTICS ARE TAKEN AT POINT 'A'

RELEASE NO.	PR-2588
REPLACES	

CHARACTERISTICS (triangle 6)
OPERATING FORCE ----- 60 GRAMS MAX
RELEASE FORCE ----- 11 GRAMS MIN
DIFFERENTIAL TRAVEL --- .015 MAX
OVERTRAVEL ----- .010 MIN

ELECTRICAL DATA			
CONTACT ARRANGEMENT S P D T			
30 VOLTS DC RATING			
		SEA LEVEL	50,000 FT
INDUCTIVE		0.5 AMP	0.5 AMP
RESISTIVE		1 AMP	1 AMP
MAXIMUM INRUSH 2 AMP			
APPROVALS	KEMA, CE	1A 250 V ~ T125 25E3	 05 
	UL, CSA	1A 125 VAC	  BRAND L22J

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:
NO PLACE X ±
ONE PLACE .X ±
TWO PLACE .XX ±
THREE PLACE .XXX ±
FOUR PLACE .XXXX ±
ANGLES ±
THIRD ANGLE PROJECTION

DRAWN	SPK	27FEB08
CHECK	RJ	27FEB08
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell			
TITLE			
SWITCH - BASIC			
SIZE	TYPE	DRAWING NAME	REV
B	I	313SX4-T	12
SCALE	-	WEIGHT: .003 LB MAX	SHEET 1 OF 1