


HONEYWELL
PART NUMBER

313SX5-T

PRODUCT CODE
VDT0065

REV	DOCUMENT	CHANGED BY	CHECK
10	0038558	SS 08MAY08	BLR

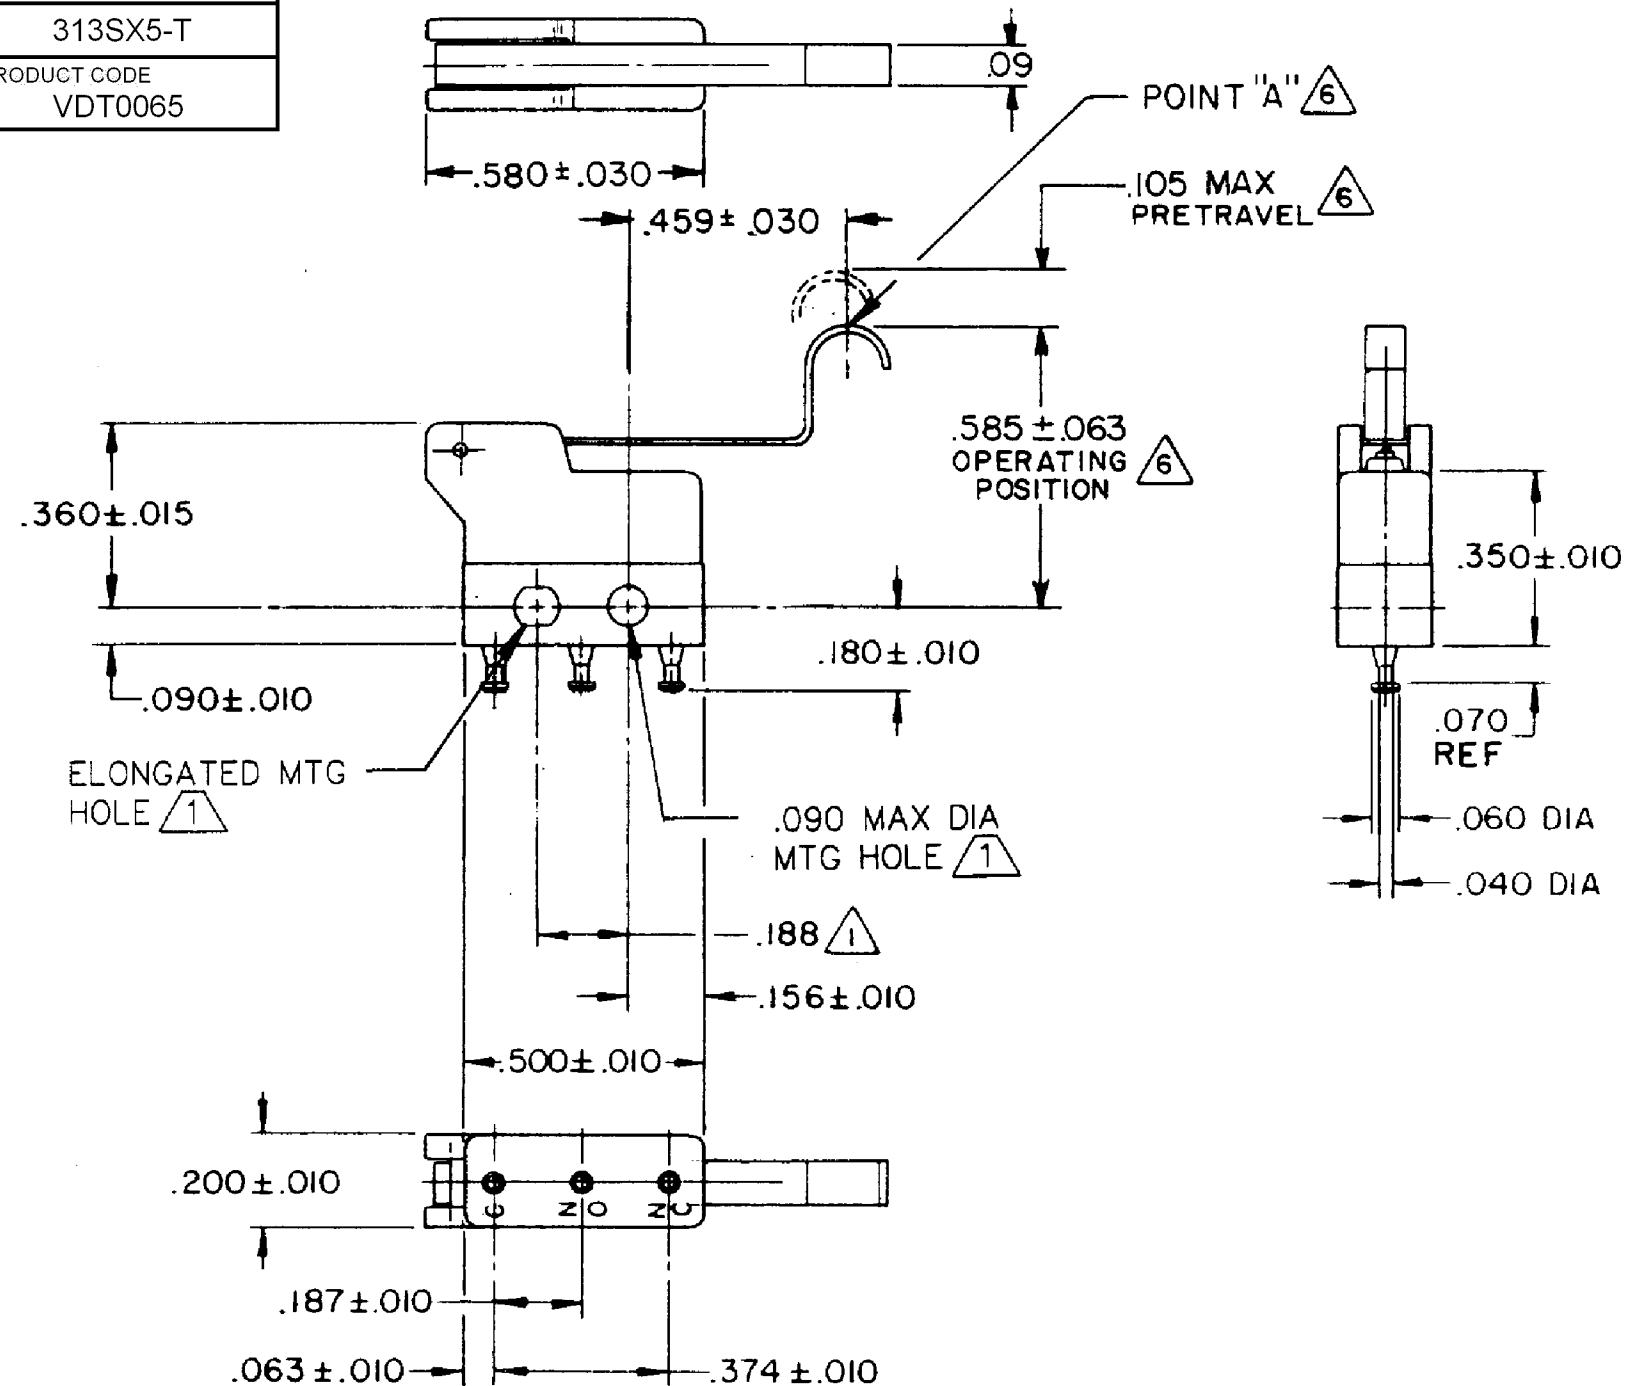

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188 ± .002 CENTERS
- 2 - TERMINALS ARE SOLDER DIPPED WITH RoHS-COMPLIANT TIN/COPPER/SILVER SOLDER.
- 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F
- 4 - MOVABLE CONTACT MATERIAL-24 K SOLID GOLD OVERLAY
- 5 - STATIONARY CONTACT MATERIAL-GOLD ALLOY
- 6 - CHARACTERISTICS ARE TAKEN AT POINT A

RELEASE NO. PR-2877

REPLACES

CHARACTERISTICS 6

OPERATING FORCE----- 30 GRAMS MAX

RELEASE FORCE----- 5 GRAMS MIN

DIFFERENTIAL TRAVEL--- .035 MAX

OVERTRAVEL----- .022 MIN

ELECTRICAL DATA			
CONTACT ARRANGEMENT S P D T			
30 VOLTS DC RATING			
		SEA LEVEL	50,000 FT
INDUCTIVE		0.5 AMP	0.5 AMP
RESISTIVE		1 AMP	1 AMP
MAXIMUM INRUSH 2 AMP			
APPROVALS	KEMA, CE	1A 250 V ~ T125 25E3	 
	UL, CSA	1A 125 VAC	  BRAND
			L22J

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE X ±

ONE PLACE .X ±

TWO PLACE .XX ±

THREE PLACE .XXX ±

FOUR PLACE .XXXX ±

ANGLES ±

THIRD ANGLE PROJECTION



DRAWN	SPK	27FEB08
CHECK	RJ	27FEB08
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		

RASTER

Honeywell

TITLE

SWITCH - BASIC

SIZE	TYPE	DRAWING NAME	REV
B	I	313SX5-T	10
SCALE	-	WEIGHT:	SHEET 1 OF 1