

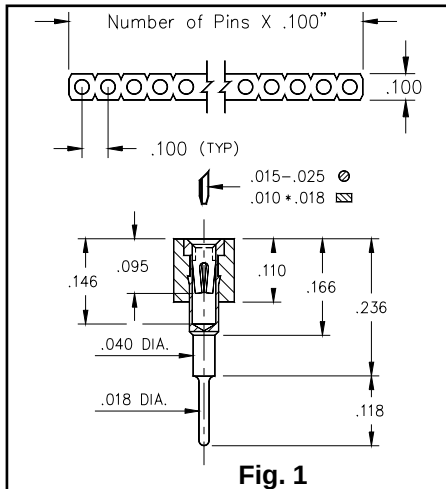


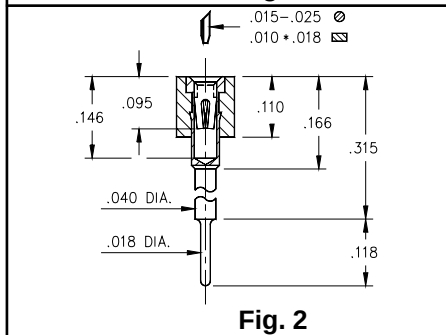

- Elevated socket strips are available in 5 different heights.




316...006 uses pin # 0153-1
 316...003 uses pin # 0153-2
 316...007 uses pin # 0153-3
 316...008 uses pin # 0153-4
 316...001 uses pin # 0153-5

- Hi-Rel, 4-finger BeCu #30 clip rated at 3 amps. See page 208 for details.

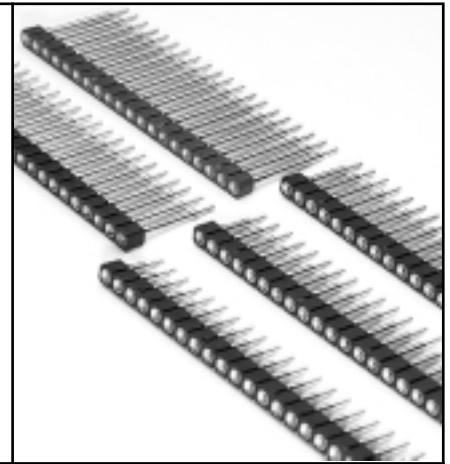

Ordering Information

Fig. 1	Series 316...006	Standoff Height = .236
	316-XX-1__-41-006 Specify # of pins → 01-64	
Fig. 2	Series 316...003	Standoff Height = .315
	316-XX-1__-41-003 Specify # of pins → 01-64	
Fig. 3	Series 316...007	Standoff Height = .402
	316-XX-1__-41-007 Specify # of pins → 01-64	
Fig. 4	Series 316...008	Standoff Height = .472
	316-XX-1__-41-008 Specify # of pins → 01-64	
Fig. 5	Series 316...001	Standoff Height = .594
	316-XX-1__-41-001 Specify # of pins → 01-64	

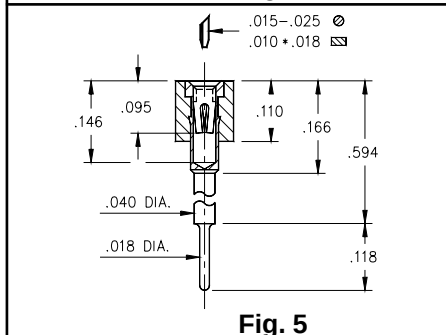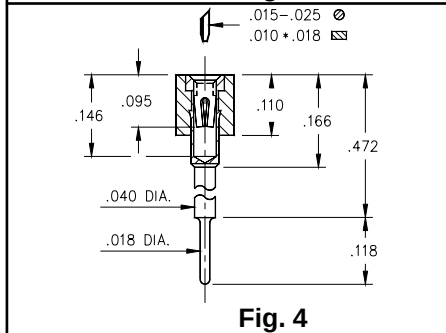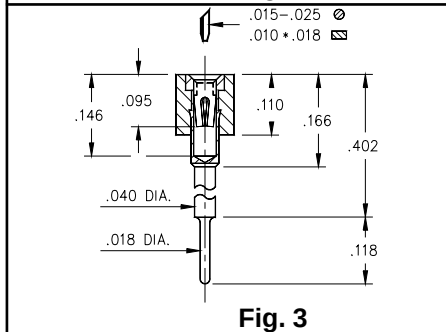

**XX= Plating Code
See Below**

**For High Temperature
Insulators Add '100'
To End Of
Part Numbers**

SPECIFY PLATING CODE XX=			93	
Sleeve (Pin)			200μ" Sn/Pb	
Contact (Clip)			30μ" Au	