

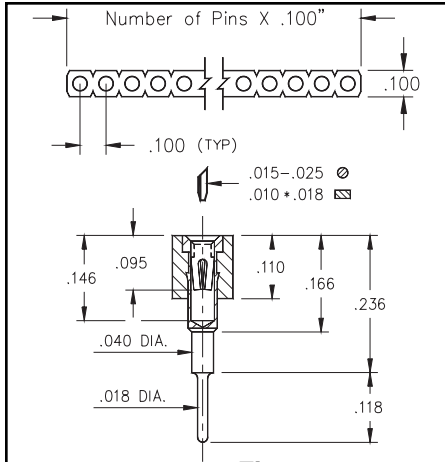


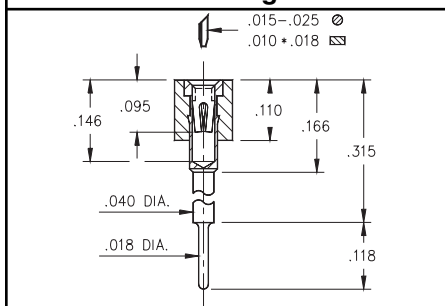


**Fig. 1**


- Elevated socket strips are available in 5 different heights:
- 316...006 uses pin # 0153-1
- 316...003 uses pin # 0153-2
- 316...007 uses pin # 0153-3
- 316...008 uses pin # 0153-4
- 316...001 uses pin # 0153-5
- See page 136 for details.
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 208 for details.
- Insulators are high temp. thermoplastic.

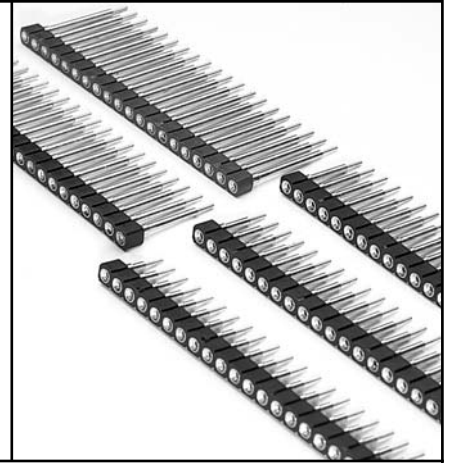


**Fig. 2**

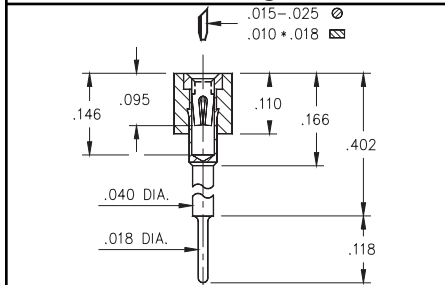

**Fig. 3**

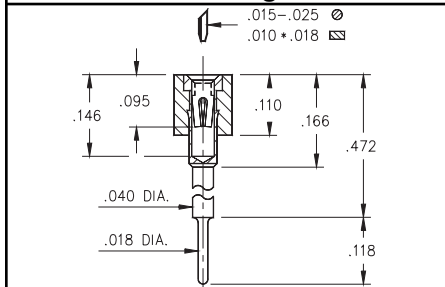

**Fig. 4**

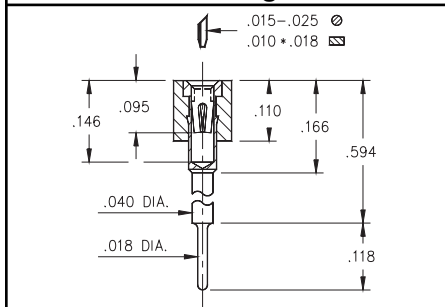

**Fig. 5**

### Ordering Information

|               |                         |                               |
|---------------|-------------------------|-------------------------------|
| <b>Fig. 1</b> | <b>Series 316...006</b> | <b>Standoff Height = .236</b> |
|               | 316-XX-1_-41-006000     | Specify # of pins → 01-64     |
| <b>Fig. 2</b> | <b>Series 316...003</b> | <b>Standoff Height = .315</b> |
|               | 316-XX-1_-41-003000     | Specify # of pins → 01-64     |
| <b>Fig. 3</b> | <b>Series 316...007</b> | <b>Standoff Height = .402</b> |
|               | 316-XX-1_-41-007000     | Specify # of pins → 01-64     |
| <b>Fig. 4</b> | <b>Series 316...008</b> | <b>Standoff Height = .472</b> |
|               | 316-XX-1_-41-008000     | Specify # of pins → 01-64     |
| <b>Fig. 5</b> | <b>Series 316...001</b> | <b>Standoff Height = .594</b> |
|               | 316-XX-1_-41-001000     | Specify # of pins → 01-64     |



**XX=Plating Code  
See Below**

**For RoHS compliance  
select ◇ plating code.**

|                          |  |  |             |  |  |            |  |
|--------------------------|--|--|-------------|--|--|------------|--|
| SPECIFY PLATING CODE XX= |  |  | <b>93</b>   |  |  | <b>43◇</b> |  |
| Sleeve (Pin)             |  |  | 200μ" Sn/Pb |  |  | 200μ" Sn   |  |
| Contact (Clip)           |  |  | 30μ" Au     |  |  | 30μ" Au    |  |