

4

3


2

1


used for:

D-SUB

POS.	A -0.76	B -0.25	C	Part-No.
9	31.19	16.46	25.00 $^{+0.12}_{-0.13}$	320X12519X
15	39.52	24.79	33.30 $^{+0.15}_{-0.1}$	320X12539X
25	53.42	38.50	47.04 ± 0.13	320X10559X
37	69.70	54.96	63.50 ± 0.13	320X12559X

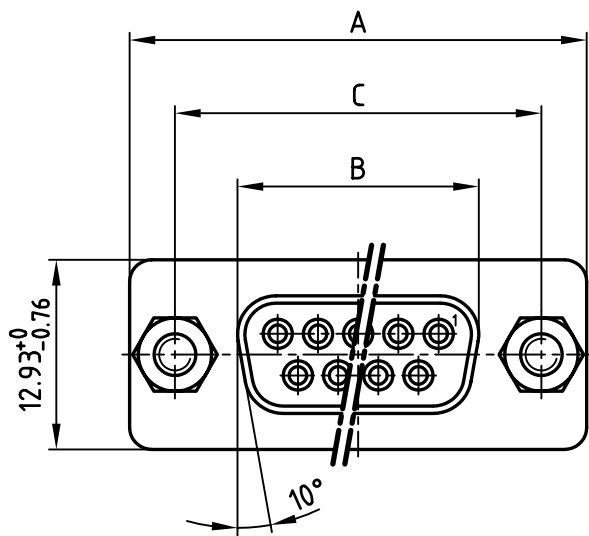


4-40 UNC

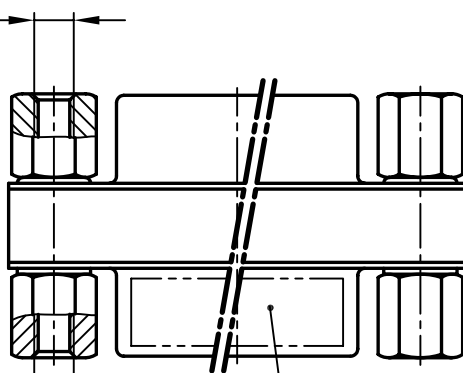

4-40 UNC

SEE NOTE 5

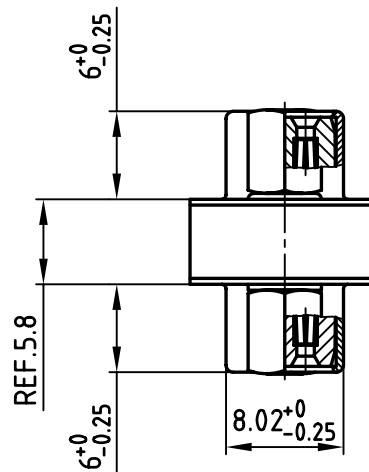


NOTES:

1. METAL SHELLS: STEEL; min. 320µ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLUE
3. CONTACTS: COPPER ALLOY
PLATING: 8µ" HARD GOLD OVER min. 50µ" NICKEL
4. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
5. CONNECTOR IS PART MARKED: PART-NO. CONEC ABC

APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

				tolerance		 dim. in mm
				2006	date	name
				drawn	03.02.	Lehmenkühler
				appd.	03.02.	Mickenbecker
				norm	DIN 41652	
				d-old		
a	Origin					
rev.	description	date	name			

scale:	2:1	
material:	SEE NOTES	
title:	D-SUB GENDER CHANGER 2 x SOCKET CONNECTOR 9-37pos.	
dwg no:	AutoCAD 2004	DIN-A
	16K1A1724	4
		sh: 1/1
part no:	SEE TABLE	

4

3

2

1