

4


3

2

1


used for:

D-SUB

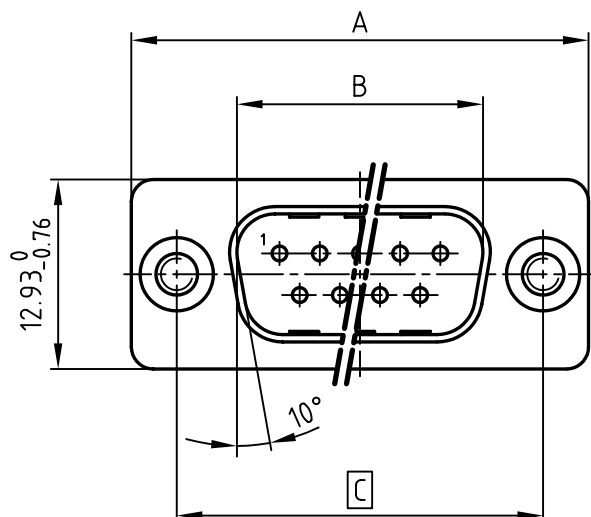


| POS. | A $-0.76$ | B $+0.25$ | C                        | D $-0.3$ | Part NO.   |
|------|-----------|-----------|--------------------------|----------|------------|
| 9    | 31.19     | 16.79     | 25.00 $+0.12$<br>$-0.13$ | 6.12     | 320X12509X |
| 15   | 39.52     | 25.12     | 33.30 $+0.15$<br>$-0.1$  | 6.12     | 320X12529X |
| 25   | 53.42     | 38.84     | 47.04 $\pm 0.13$         | 5.99     | 320X10549X |
| 37   | 69.70     | 55.30     | 63.50 $\pm 0.13$         | 5.99     | 320X12549X |

4-40 UNC

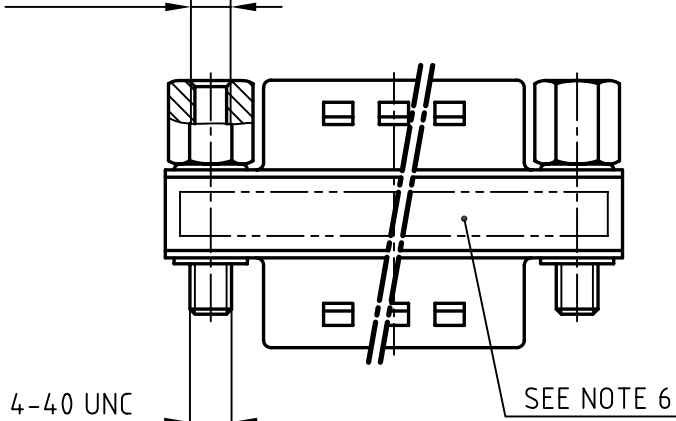

4-40 UNC

SEE NOTE 6

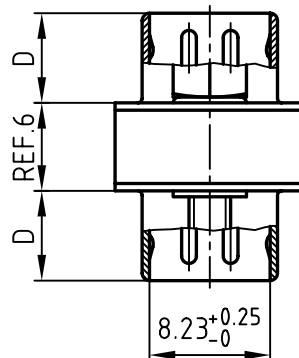

## NOTES:

1. METAL SHELLS: STEEL; min. 320µ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLUE (b)
3. CONTACTS: COPPER ALLOY
4. PLATING: HARD GOLD OVER NICKEL
5. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
6. CONNECTOR IS PART MARKED: PART-NO. CONEC Y/WW
7.   = CRITICAL DIMENSION

THIS DRAWING MAY NOT BE COPIED OR  
REPRODUCED IN ANY WAY, AND MAY NOT  
BE PASSED ON TO A THIRD PARTY WITHOUT  
WRITTEN PERMISSION.  
OWNERSHIP AND COPYRIGHT OF CONEC GmbH  
DO NOT ALTER CAD DRAWING BY HAND

|       |             |            |      |                                                                                     |           |                                                                                     |
|-------|-------------|------------|------|-------------------------------------------------------------------------------------|-----------|-------------------------------------------------------------------------------------|
|       |             |            |      | tolerance                                                                           |           |  |
|       |             |            |      | 2002                                                                                | date      | name                                                                                |
|       |             |            |      | drawn                                                                               | 30.04.    | Parei                                                                               |
|       |             |            |      | appd.                                                                               | 30.04.    | E. Mickenbecker                                                                     |
|       |             |            |      | norm                                                                                | DIN 41652 |                                                                                     |
|       |             |            |      | d-old                                                                               |           |                                                                                     |
|       |             |            |      |  |           |                                                                                     |
| 1 x b | Ä 2202      | 07.04.2005 | HS   |                                                                                     |           |                                                                                     |
| rev.  | description | date       | name |                                                                                     |           |                                                                                     |

|           |                                                  |         |
|-----------|--------------------------------------------------|---------|
| scale:    | 2:1                                              |         |
| material: | SEE NOTES                                        |         |
| title:    | GENDER CHANGER<br>2 x plug connector<br>9-37pos. |         |
| dwg no:   | AutoCAD 2000                                     | DIN-A   |
|           | 16K1A557                                         | 4       |
| part no:  | SEE TABLE                                        |         |
|           |                                                  | sh: 1/1 |

4

3

2

1