


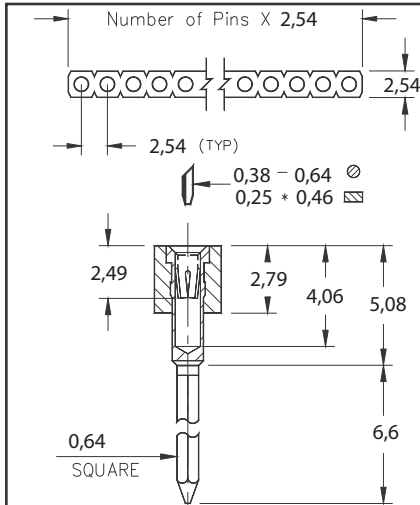


Fig. 1

- Wraposts available in 1 - 4 levels using MM pin numbers:
1-Level uses pin # 0040-1
2-Level uses pin # 0089-2
3-Level uses pin # 0088-3
4 Level uses pin # 0086-4
See page 162 for details.
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 208 for details.
- Insulators are high temp. thermoplastic.

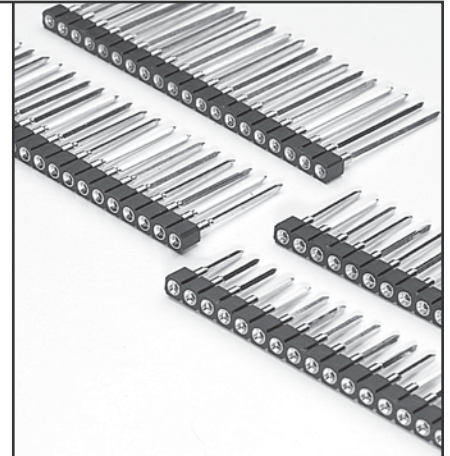

Ordering Information

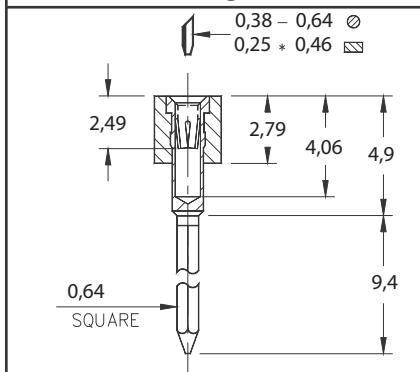


Fig. 2

Fig. 1

Series 321...001 1 Level Wrapost

321-13-1_ _ -41-001000
Specify # of pins → 01-64

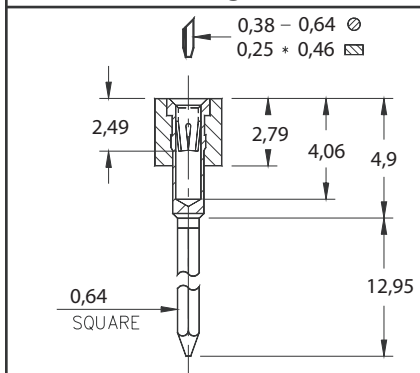


Fig. 3

Fig. 2

Series 322...001 2 Level Wrapost

322-XX-1_ _ -41-001000
Specify # of pins → 01-64

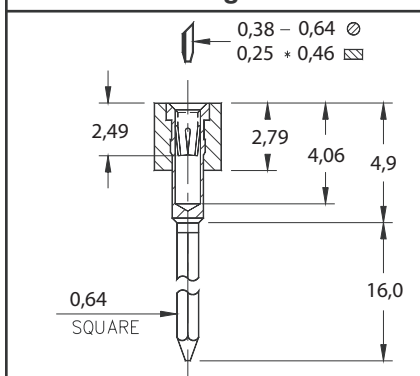


Fig. 4

Fig. 3

Series 323...001 3 Level Wrapost

323-XX-1_ _ -41-001000
Specify # of pins → 01-64

Series 324...002 4 Level Wrapost

324-XX-1_ _ -41-002000
Specify # of pins → 01-64



**XX=Plating Code
See Below**

**For RoHS compliance
select ◇ plating code.**

SPECIFY PLATING CODE XX=	13◇		93			43◇	
Sleeve (Pin)		0,25µm Au		5,08µm Sn/Pb		5,08µm Sn	
Contact (Clip)		0,76µm Au		0,76µm Au		0,76µm Au	