

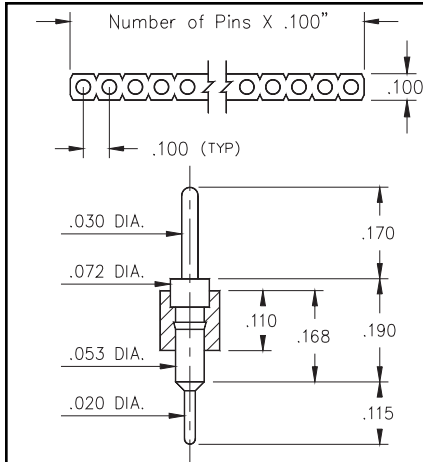


Fig. 1

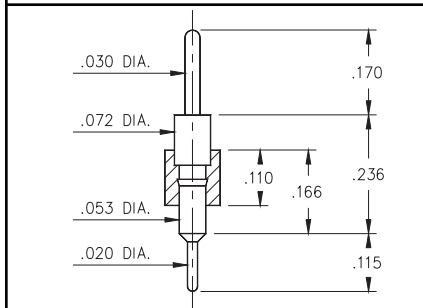


Fig. 2

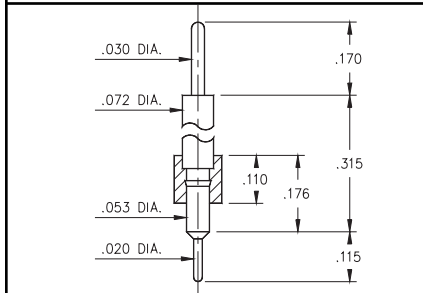


Fig. 3

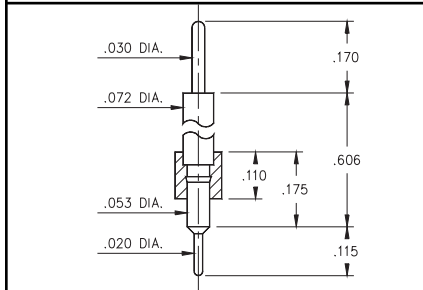


Fig. 4

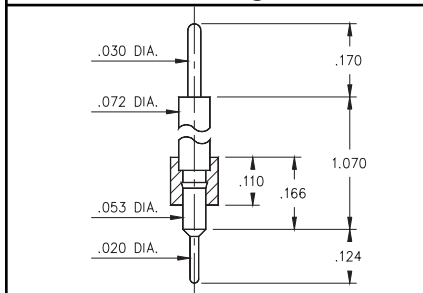


Fig. 5

- Series 334 Interconnect header strips are available in 5 lengths:

334...020 uses pin #3402 (L = .190")  
334...010 uses pin #3401 (L = .236")  
334...050 uses pin #3405 (L = .315")  
334...000 uses pin #3400 (L = .606")  
334...100 uses pin #3410 (L = 1.070")  
See pages 173 for details.

- Strips come with .020" pluggable solder tails at one end and .030" tails at the other.
- Insulators are high temp. thermoplastic.



## Ordering Information

|        |                                                      |
|--------|------------------------------------------------------|
| Fig. 1 | Series 334...020 .020 / .030 Solder Tails            |
|        | 334-XX-1 _ _ -00-020000<br>Specify # of pins → 01-64 |
| Fig. 2 | Series 334...010 .020 / .030 Solder Tails            |
|        | 334-XX-1 _ _ -00-010000<br>Specify # of pins → 01-64 |
| Fig. 3 | Series 334...050 .020 / .030 Solder Tails            |
|        | 334-XX-1 _ _ -00-050000<br>Specify # of pins → 01-64 |
| Fig. 4 | Series 334...000 .020 / .030 Solder Tails            |
|        | 334-XX-1 _ _ -00-000000<br>Specify # of pins → 01-64 |
| Fig. 5 | Series 334...100 .020 / .030 Solder Tails            |
|        | 334-XX-1 _ _ -00-100000<br>Specify # of pins → 01-64 |

For RoHS compliance  
select ◇ plating code.

XX=Plating Code  
See Below



|                          |         |             |          |  |
|--------------------------|---------|-------------|----------|--|
| SPECIFY PLATING CODE XX= | 10 ◇    | 90          | 40 ◇     |  |
| Pin Plating              | 10μ" Au | 200μ" Sn/Pb | 200μ" Sn |  |