

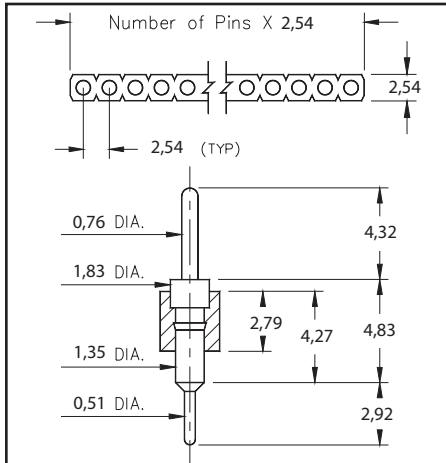


Fig. 1

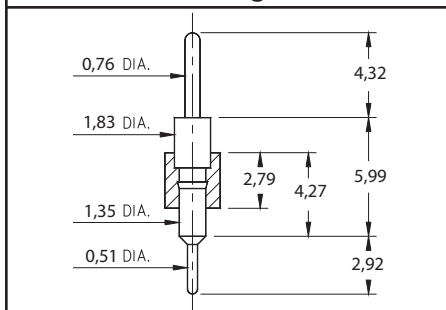


Fig. 2

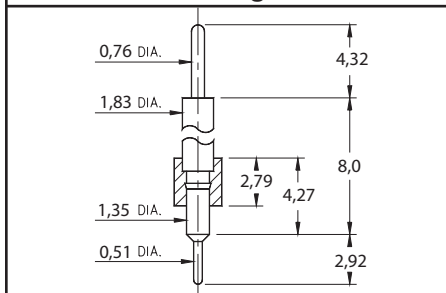


Fig. 3

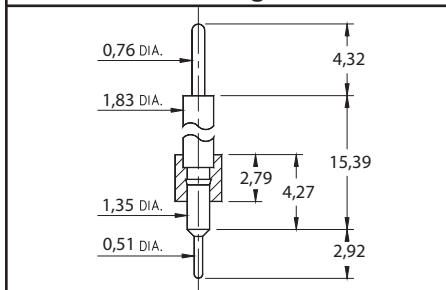


Fig. 4

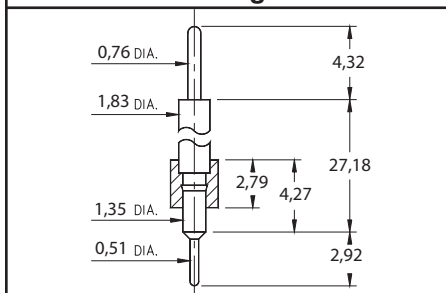


Fig. 5

- Series 334 Interconnect header strips are available in 5 lengths:

334...020 uses pin #3402 (L = 4,83)
334...010 uses pin #3401 (L = 5,99)
334...050 uses pin #3405 (L = 8,0)
334...000 uses pin #3400 (L = 15,39)
334...100 uses pin #3410 (L = 27,18)
See pages 173 for details.

- Strips come with 0,51 pluggable solder tails at one end and 0,76 tails at the other.
- Insulators are high temp. thermoplastic.



Ordering Information

Fig. 1	Series 334...020	0,51 / 0,76 Solder Tails
	334-XX-1 _ _ -00-020000 Specify # of pins → 01-64	
Fig. 2	Series 334...010	0,51 / 0,76 Solder Tails
	334-XX-1 _ _ -00-010000 Specify # of pins → 01-64	
Fig. 3	Series 334...050	0,51 / 0,76 Solder Tails
	334-XX-1 _ _ -00-050000 Specify # of pins → 01-64	
Fig. 4	Series 334...000	0,51 / 0,76 Solder Tails
	334-XX-1 _ _ -00-000000 Specify # of pins → 01-64	
Fig. 5	Series 334...100	0,51 / 0,76 Solder Tails
	334-XX-1 _ _ -00-100000 Specify # of pins → 01-64	

For RoHS compliance
select plating code.

XX=Plating Code
See Below

RoHS
2002/95/EC

SPECIFY PLATING CODE XX=	10	90	40	
Pin Plating	0,25µm Au	5,08µm Sn/Pb	5,08µm Sn	