

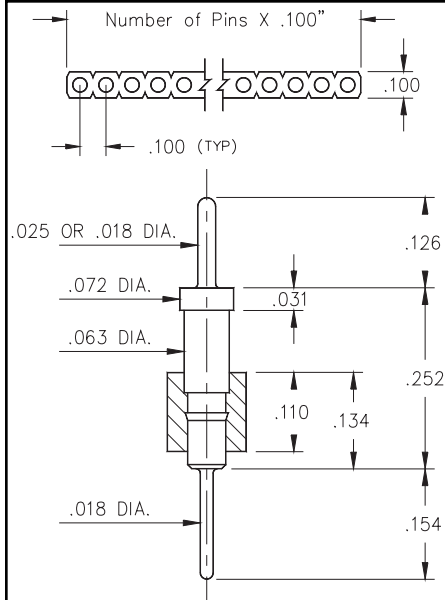


Fig. 1

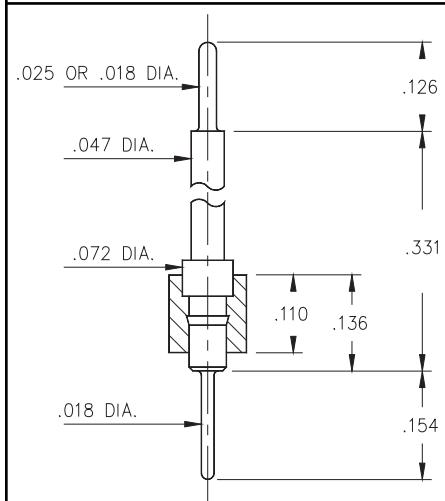


Fig. 2

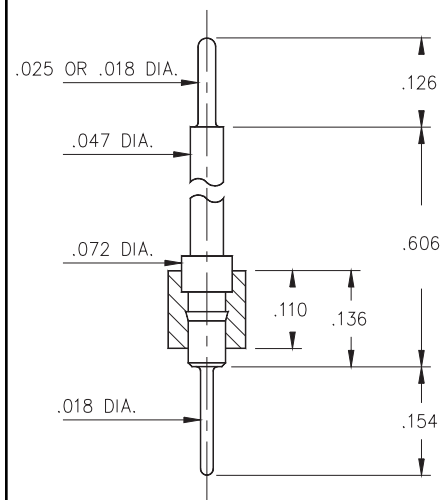


Fig. 3

- Series 351 Interconnect header strips come in three lengths with .018" dia. pluggable solder tails at one end and .025" dia. pins at the other, see series:
351...003 uses pin #5503
351...004 uses pin #5504
351...005 uses pin #5505
- .018" pluggable solder tails are available at both ends, please see series:
351...009 uses pin #5509
351...010 uses pin #5510
351...011 uses pin #5511
See pages 170 & 172 for details.
- Insulators are high temp. thermoplastic.



Ordering Information

Fig. 1

Series 351...003 .018 / .025 Solder Tails

351-XX-1__-00-003000

Specify # of pins → 01-64

Series 351...009 .018 / .018 Solder Tails

351-XX-1__-00-009000

Specify # of pins → 01-64

Fig. 2

Series 351...004 .018 / .025 Solder Tails

351-XX-1__-00-004000

Specify # of pins → 01-64

Series 351...010 .018 / .018 Solder Tails

351-XX-1__-00-010000

Specify # of pins → 01-64

Fig. 3

Series 351...005 .018 / .025 Solder Tails

351-XX-1__-00-005000

Specify # of pins → 01-64

Series 351...011 .018 / .018 Solder Tails

351-XX-1__-00-011000

Specify # of pins → 01-64

For RoHS compliance
select ◇ plating code.


XX=Plating Code
See Below



SPECIFY PLATING CODE XX=

10◇

Pin Plating



10μ" Au