

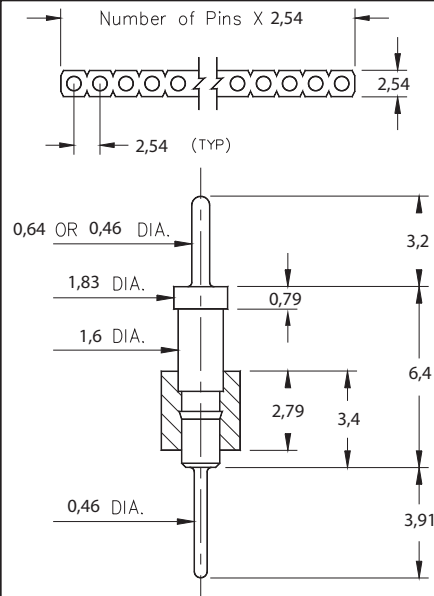


Fig. 1

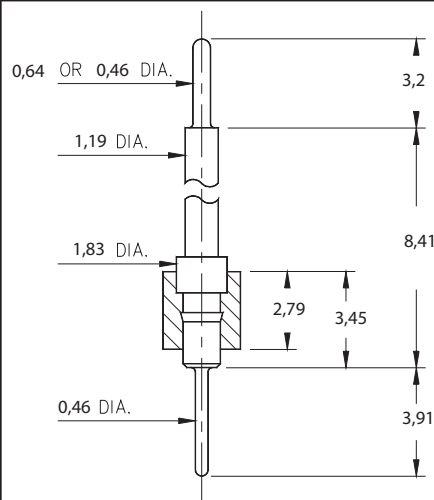


Fig. 2

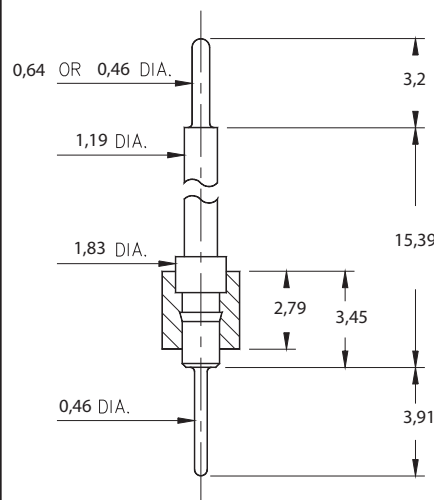


Fig. 3

- Series 351 Interconnect header strips come in three lengths with 0,46 dia. pluggable solder tails at one end and 0,64 dia. pins at the other, see series:
351...003 uses pin #5503
351...004 uses pin #5504
351...005 uses pin #5505
- 0,46 pluggable solder tails are available at both ends, please see series:
351...009 uses pin #5509
351...010 uses pin #5510
351...011 uses pin #5511
See pages 170 & 172 for details.
- Insulators are high temp. thermoplastic.



Ordering Information

Fig. 1	Series 351...003	0,46 / 0,64	Solder Tails		
	351-XX-1__-00-003000				
	Specify # of pins		01-64		
	Series 351...009	0,46 / 0,46	Solder Tails		
Fig. 2	351-XX-1__-00-009000				
	Specify # of pins		01-64		
	Series 351...004	0,46 / 0,64	Solder Tails		
	351-XX-1__-00-004000				
Fig. 3	Specify # of pins		01-64		
	Series 351...010	0,46 / 0,46	Solder Tails		
	351-XX-1__-00-010000				
	Specify # of pins		01-64		
Fig. 3	Series 351...005	0,46 / 0,64	Solder Tails		
	351-XX-1__-00-005000				
	Specify # of pins		01-64		
	Series 351...011	0,46 / 0,46	Solder Tails		
Fig. 3	351-XX-1__-00-011000				
	Specify # of pins		01-64		
For RoHS compliance select  plating code. XX=Plating Code See Below RoHS 2002/95/EC					
SPECIFY PLATING CODE XX=		10 			
Pin Plating 		0,25µm Au			