


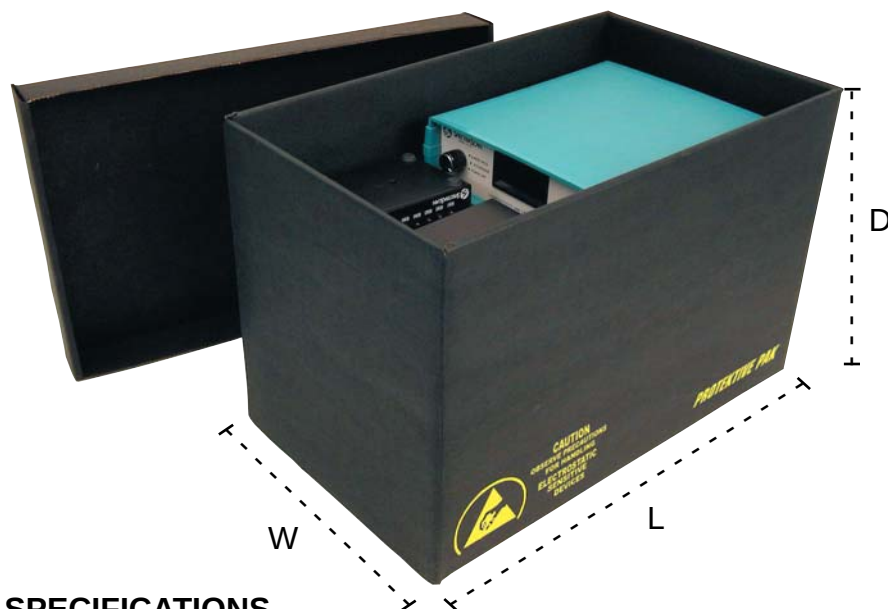

Features

- Provides ESD and physical protection for ESD sensitive components; with lid in place, shielding creates "Faraday Cage" restricting electrostatic charges to exterior to ship or store ESD sensitive items outside an ESD protected area
- Available with optional lid, steel reinforcing frame for additional strength and durability, ESD handles, and permanently static dissipative bottom foam pad for cushioning
- Impregnated corrugated material; greater durability than coated or printed material
- Constructed with double sides, double (boxes under 6" deep) or triple (boxes over 6" deep) ends, and single (boxes under 6" deep) or double (boxes over 6" deep) thickness bottom for greater durability
- Static dissipative surface of $10^7 - 10^9$ ohms - minimizing the potential of rapid discharge or sparking
- Buried shielding layer minimizing the potential of sloughing and rub-off contamination
- Made from 100% recycled material, and is 100% recyclable
- No tooling cost
- Easy assembly without the need for tape, glue, or staples
- Reusable, ensuring low cost

SPECIFICATIONS

Properties

Electrostatic Decay

Surface Resistivity

Surface Resistivity, Low R.H. Cut-off

High-Voltage Discharge Resistance

Static Shielding

Charged Device Model (CDM) Safety

Current-Carrying Hazard

Corrosivity

Antistat Transfer

Water & Isopropyl Alcohol Extraction

Tests for Antistat Permanence

Sloughing Test

Recyclability

Biodegradability

Volume Conductivity

Shelf Life

Typical Values

0.01 seconds at 72°F and 11.8% R.H.

$10^7 - 10^8$ ohms/sq. after 11 days at 68°F and 12% R.H. for surface. $10^3 - 10^4$ ohms/sq. for buried shielding layer 4% R.H.

Failure rate 0/5 (no oxide damage in five consecutive tests)

99.9% attenuation at 10kV; 99.6% attenuation at 30kV

RTG $>10^7$ ohms at 86% R.H. or less

10^3 mA at 110V; 10^3 mA at 220V

Contains 1-3 ppm reducible sulfur

No transfer

Surface resistivity $10^8 - 10^9$ ohms/square at 74°F and 36% R.H.

Negligible surface damage at 10 cycles and <5% of surface damage at 200 cycles in Taber Abrasion Test.

No conductive particles abraded from surface

Complete recyclability of package

Biodegradation in or on moist soil

Conductivity from wall to wall as well as across surface to assure permanence of the antistatic property

Indefinite

Test Procedures/Method

FED-STD-101, Method 4046

ASTM D257

Rockwell International Test Report of December 20, 1991

Rockwell International Test Report of December 20, 1991

EIA 541, appendix E, capacitive probe test

Rockwell International Test Report of December 20, 1991

ESD from A to Z

FED-STD-101, Method 3005 for reducible sulfur

Rockwell International Test Report of January 8, 1992

Rockwell International Test Report of January 8, 1992

ASTM D4060 at 70 rpm with CS-17 abrasive-coated wheels and 1000 grams load

Rockwell International Test Report of January 8, 1992

Rockwell International Test Report of January 8, 1992

Rockwell International Test Report of January 8, 1992

**See reverse side
for available sizes.**



Made in America

STORAGE CONTAINERS

PROTEKTIVE PAK

PROTEKTIVE PAK
13520 MONTE VISTA AVENUE, CHINO, CA 91710
PHONE (909) 627-2578, FAX (909) 363-7331
www.protektivepak.com

DRAWING NUMBER
37500


DATE:
7/05

Item No.	REF#	Box Size I.D. - L x W x D	Handles	Lid	Wire	Foam
37508	411-BX	16-7/8 x 10 x 3-1/2	N/A	37550	N/A	37451
37501	401-BX	16-7/8 x 10 x 5-3/8	N/A	37550	N/A	37451
37509	422-BX	17 x 9-7/8 x 2-1/2	N/A	37550	N/A	37451
37500	400-BX	17 x 9-7/8 x 7-1/4	37450	37550	N/A	37451
37502	402-BX	17 x 9-7/8 x 11-5/8	37450	37550	N/A	37451
37511	436-BX	17 x 13 x 6-3/4	37450	37551	37456	37452
37512	438-BX	17 x 13 x 8-3/4	37450	37551	37456	37452
37513	439-BX	17 x 13 x 10-3/4	37450	37551	37456	37452
37503	403-BX	17 x 13 x 12-5/8	37450	37551	37456	37452
37510•	434-BX	17 x 13 x 14-3/4	37450	37551	37456	37452
37520•	456-BX	18-3/8 x 12-3/8 x 6-3/4	37450	37553	37458	37454
37522•	458-BX	18-3/8 x 12-3/8 x 8-3/4	37450	37553	37458	37454
37523•	459-BX	18-3/8 x 12-3/8 x 10-3/4	37450	37553	37458	37454
37519•	455-BX	18-3/8 x 12-3/8 x 14-3/4	37450	37553	37458	37454
37518	452-BX	18-3/8 x 12-3/8 x 12-3/4	37450	37553	37458	37454
37521	457-BX	18-3/8 x 12-3/8 x 17-1/8	37450	37553	37458	37454
37505	405-BX	18-1/2 x 12-3/8 x 18-3/4	37450	37553	37458	37454
37506	406-BX	18-5/8 x 15 x 5-7/8	37450	37554	37459	37455
37527	468-BX	18-5/8 x 15 x 8	37450	37554	37459	37455
37524	460-BX	18-5/8 x 15 x 10	37450	37554	37459	37455
37525	462-BX	18-5/8 x 15 x 12	37450	37554	37459	37455
37526	464-BX	18-5/8 x 15 x 14	37450	37554	37459	37455
37516	446-BX	22-7/8 x 12-7/8 x 6	37450	37552	37457	37453
37517	448-BX	22-7/8 x 12-7/8 x 8	37450	37552	37457	37453
37514	440-BX	22-7/8 x 12-7/8 x 10	37450	37552	37457	37453
37504	404-BX	22-7/8 x 12-7/8 x 12-5/8	37450	37552	37457	37453
37515	445-BX	22-7/8 x 12-7/8 x 15-1/4	37450	37552	37457	37453
37507	408-BX	22-7/8 x 12-7/8 x 18-1/4	37450	37552	37457	37453

• These items made to order

ACCESSORIES


- ESD Handles
- Wire Frames
- Foam Pads



Conductive Plastic Handles



Steel wire perimeter reinforcing frame for extra strength and durability



Permanently static dissipative crosslink bottom foam to cushion circuit boards

Item	Description	Size
37450	ESD Handles	1" x 4"
37451	Bottom Foam	1/4" x 9-3/4" x 16-3/4"
37453	Bottom Foam	1/4" x 12-1/4" x 22-5/8"
37454	Bottom Foam	1/4" x 12-1/2" x 18-1/2"
37452	Bottom Foam	1/4" x 12-5/8" x 16-5/8"
37455	Bottom Foam	1/4" x 14-3/4" x 18-3/8"
37458	Wire Frame	1/4" x 12-1/2" x 18-11/16"
37457	Wire Frame	1/4" x 12-3/4" x 23-1/8"
37456	Wire Frame	1/4" x 13-1/4" x 17-1/4"
37459	Wire Frame	1/4" x 15-1/8" x 18-13/16"