


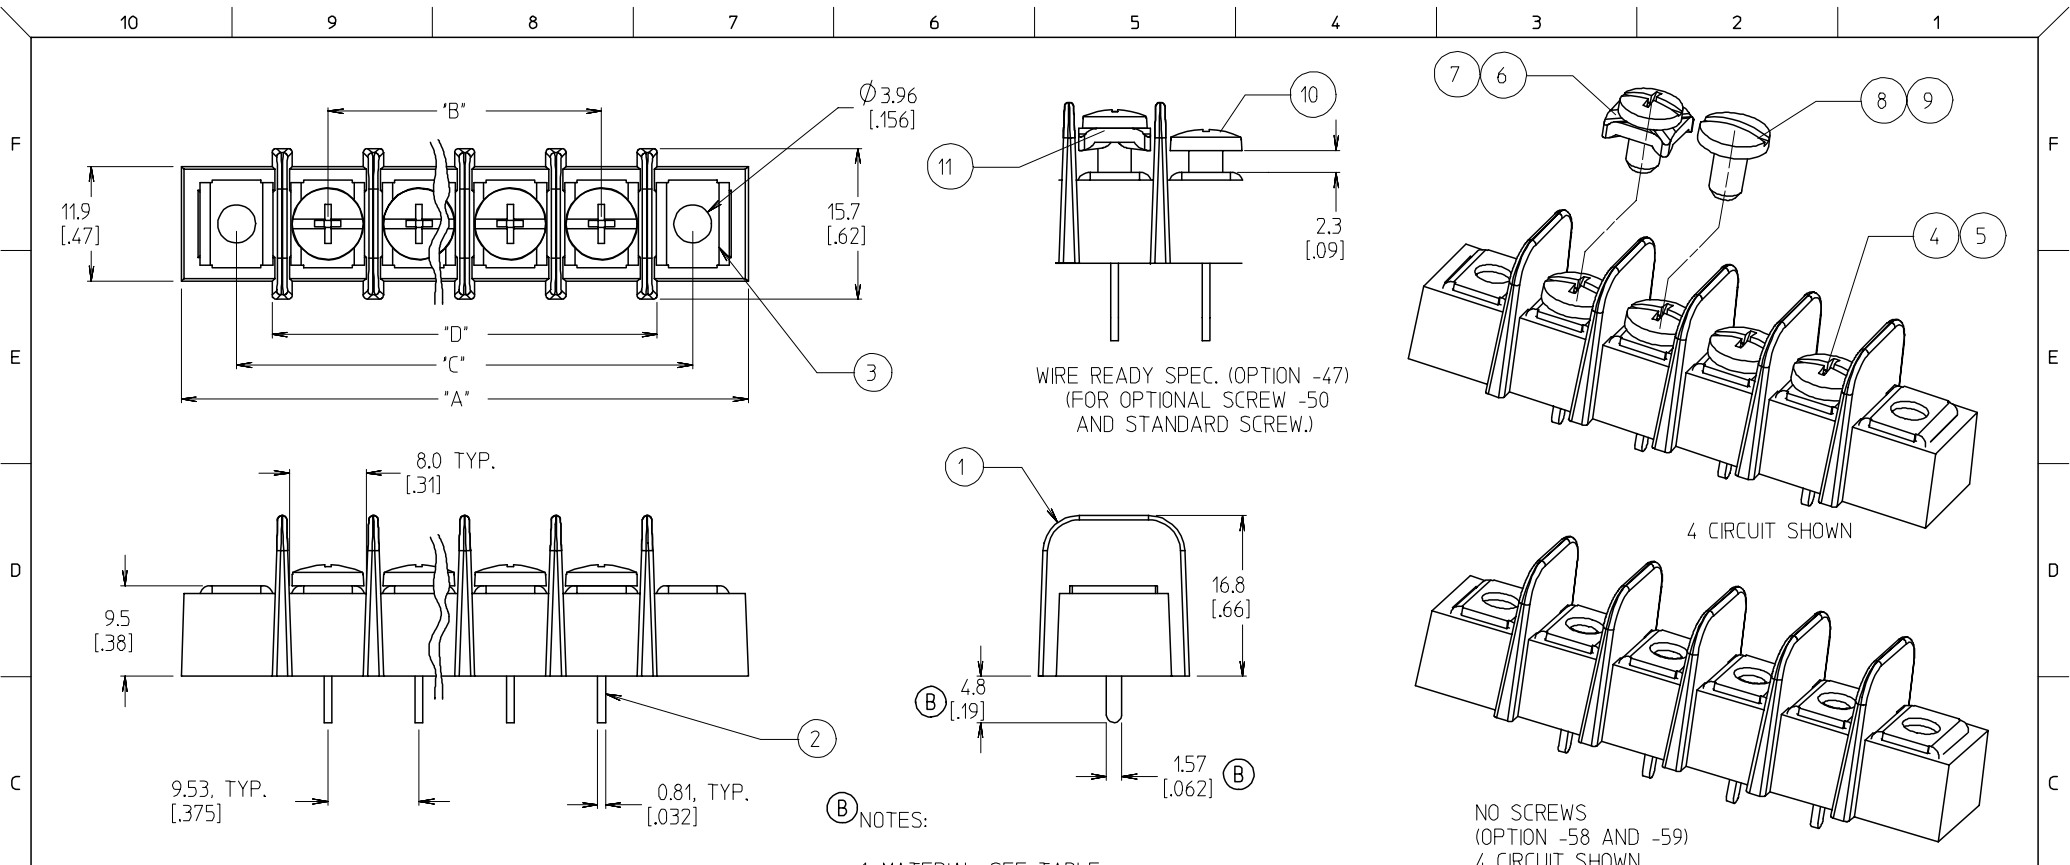

11	XX	#6-32 WRDY W/WASH SCR (-47,-50)	STEEL	ZN, CLEAR CHROMATE
10	XX	#6-32 PH/SLOT WRDY SCR (OPT -47)	STEEL	ZN, CLEAR CHROMATE
9	XX	#6-32 SLOTTED SCREW (OPT -56)	STAINLESS STEEL	PASSIVATE
8	XX	#6-32 SLOTTED SCREW (OPT -45)	STEEL	ZN, CLEAR CHROMATE
7	XX	#6-32 PH/SL W/WASH SCR (-49,-50)	BRASS	NICKEL
6	XX	#6-32 PH/SL W/WASH SCR (OPT -50)	STEEL	ZN, CLEAR CHROMATE
5	XX	#6-32 PH/SLOTTED SCREW (OPT -49)	BRASS	NICKEL
4	XX	#6-32 PH/SLOTTED SCREW (STD)	STEEL	ZN, CLEAR CHROMATE
3	2	MOUNTING PLATE	BRASS	NICKEL
2	XX	TERMINAL	BRASS	BRT.TIN/CU
1	1	INSULATOR, SINGLE ROW	PBT	BLACK
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

1. MATERIAL: SEE TABLE
2. FINISHES: SEE TABLE
3. INCH DIMENSIONS ARE IN BRACKETS [XXX].
4. REFER TO SD-38120-001 FOR IMPRINTING OPTIONS 10A AND 11A.
5. REFER TO SD-38120-007 FOR IMPRINTING OPTION 12A.
6. "XX" REFERS TO THE QUANTITY OF CIRCUITS.
7. ALL COMPONENTS ARE ROHS COMPLIANT.

ADD. MAT. NO. EC NO: ETC2007-0166
DRAWN BY: J. YOK 2006/10/19
CHKD: J. MACNEIL 2006/10/20
APPR: J. MACNEIL 2006/10/20

QUALITY SYMBOLS
=0
=0

DESCRIPTION
REV

GENERAL TOLERANCES (UNLESS SPECIFIED)
mm INCH
4 PLACES ± --- ± ---
3 PLACES ± --- ± .005
2 PLACES ± 0.13 ± .01
1 PLACE ± 0.3 ± ---
ANGULAR ± 2 °

DRAFT WHERE APPLICABLE
MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE
MM/IN

SCALE
2:1

DESIGN UNITS
INCH

THIRD ANGLE PROJECTION

DRAWN BY: W. HOWARD DATE: 2003/10/16
CHECKED BY: R. KEMP DATE: 2003/10/16
APPROVED BY: P. WALTZ DATE: 2003/10/16

MATERIAL NO. SEE SHT. 2


DOCUMENT NO. SD-38720-001

SHEET NO. 1 OF 2

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

	10	9	8		7	6	5		4	3	2	1	
	MATERIAL NO. (OPT 12A)	MATERIAL NO. (OPT 11A)	MATERIAL NO. (OPT 10A)	MATERIAL NO. (OPT -59)	MATERIAL NO. (OPT -58)	MATERIAL NO. (OPT -56)	MATERIAL NO. (OPT -50)	MATERIAL NO. (OPT -49,-50)	MATERIAL NO. (OPT -49)	MATERIAL NO. (OPT -47,-50)	MATERIAL NO. (STD)	NUMBER OF CIRCUITS 'XX'	
F			38729-1039		38729-0750	38729-0659	38720-7402	38729-1381	38720-6802	38720-6201	01		F
						38729-0791	38720-7403		38720-6803	38720-6202	02		
	38729-0872	38729-0025	38729-0014			38729-0117	38720-7404			38720-6203	03		
			38729-0940	38729-0945		38729-0839	38720-7404	38729-1159	38720-6804	38720-6204	04		
	38729-0256		38729-0346			38729-1253	38720-7405	38729-1382	38720-6805	38720-6205	05		
				38729-0400	38729-0386	38729-0980	38720-7406	38729-1383	38720-6806	38720-6206	06		
			38729-0423	38729-0407	38729-0435	38729-0440	38720-7407		38720-6807	38720-6207	07		
	38729-0497				38729-0508	38729-0532	38720-7408		38720-6808	38720-6208	08		
			38729-0548		38729-0560		38720-7409		38720-6809	38720-6209	09		
			38729-1011	38729-0598	38729-0598		38720-7410		38720-6810	38720-6210	10		
E						38729-1252	38720-7411			38720-6211	11		E
			38729-0720			38729-0735	38720-7412		38720-6812	38720-6212	12		
					38729-0809		38720-7413			38720-6213	13		
					38729-0004		38720-7414		38720-6814	38720-6214	14		
										38720-6215	15		
										38720-6216	16		
										38720-6217	17		
										38720-6218	18		
										38720-6219	19		
										38720-6220	20		
D										38720-6221	21		D
										38720-6222	22		
										38720-6223	23		
										38720-6224	24		
										38720-6225	25		
										38720-6226	26		

	NUMBER OF CIRCUITS 'XX'	DIM. 'A'	DIM. 'B'	DIM. 'C'	DIM. 'D'	
C	01	30.7 [1.21]	-	19.1 [0.75]	11.6 [0.46]	B
	02	40.1 [1.58]	9.53 [0.375]	28.6 [1.13]	21.1 [0.83]	
	03	49.7 [1.96]	19.05 [0.750]	38.1 [1.50]	30.6 [1.21]	
	04	59.2 [2.33]	28.58 [1.125]	47.6 [1.88]	40.1 [1.58]	
	05	68.7 [2.71]	38.10 [1.500]	57.2 [2.25]	49.7 [1.96]	
	06	78.2 [3.08]	47.63 [1.875]	66.7 [2.63]	59.2 [2.33]	
	07	87.8 [3.46]	57.15 [2.250]	76.2 [3.00]	68.7 [2.71]	
	08	97.3 [3.83]	66.68 [2.625]	85.7 [3.38]	78.2 [3.08]	
	09	106.8 [4.21]	76.20 [3.000]	95.3 [3.75]	87.8 [3.46]	
	10	116.3 [4.58]	85.73 [3.375]	104.8 [4.13]	97.3 [3.83]	
B	11	125.9 [4.96]	95.25 [3.750]	114.3 [4.50]	106.8 [4.21]	
	12	135.4 [5.33]	104.78 [4.125]	123.8 [4.88]	116.3 [4.58]	
	13	144.9 [5.71]	114.30 [4.500]	133.4 [5.25]	125.9 [4.96]	
	14	154.4 [6.08]	123.83 [4.875]	142.9 [5.63]	135.4 [5.33]	
	15	164.0 [6.46]	133.35 [5.250]	152.4 [6.00]	144.9 [5.71]	
	16	173.5 [6.83]	142.88 [5.625]	161.9 [6.38]	154.4 [6.08]	
	17	183.0 [7.21]	152.40 [6.000]	171.5 [6.75]	164.0 [6.46]	
	18	192.5 [7.58]	161.93 [6.375]	181.0 [7.13]	173.5 [7.21]	
	19	202.1 [7.96]	171.45 [6.750]	190.5 [7.50]	192.5 [7.58]	
	20	211.6 [8.33]	180.98 [7.125]	200.0 [7.88]	202.1 [7.96]	
	21	221.1 [8.71]	190.50 [7.500]	209.6 [8.25]	211.6 [8.33]	
A	22	230.6 [9.08]	200.03 [7.875]	219.1 [8.63]	221.1 [8.71]	
	23	240.2 [9.46]	209.55 [8.250]	228.6 [9.00]	230.6 [9.08]	
	24	249.7 [9.83]	219.08 [8.625]	238.1 [9.38]	230.6 [9.08]	
	25	259.2 [10.21]	228.60 [9.000]	247.7 [9.75]	240.2 [9.46]	
	26	268.7 [10.58]	238.13 [9.375]	257.2 [10.13]	249.7 [9.83]	

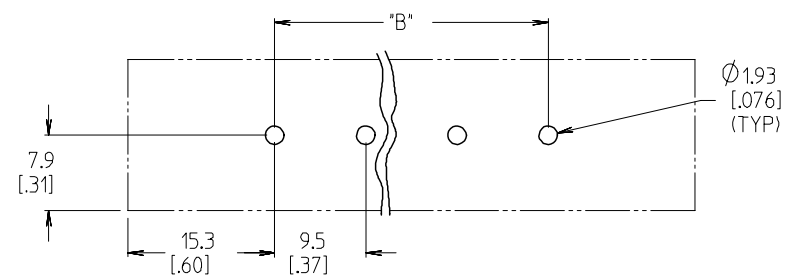

PTH PATTERN

SEE SHEET 1 EC NO: ETC2007-0166 DRWN: CLYORK 2006/10/19 CHKD: JMACNEIL 2006/10/20 APPR: JMACNEIL 2006/10/20	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ±.005 2 PLACES ± 0.13 ±.01 1 PLACE ± 0.3 ± --- ANGULAR ± 2 °	DIMENSION STYLE MM/IN		SCALE 2:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
			DRAWN BY W. HOWARD		DATE 2003/10/16	TITLE 9.53MM [0.375] SR BTS, PC ASSY	
			CHECKED BY R. KEMP		DATE 2003/10/16	APPROVED BY P. WALTZ	
			DATE 2003/10/16		MATERIAL NO. SD-38720-001		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE CHART		DOCUMENT NO.		SHEET NO. 2 OF 2
SIZE B			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				