





11MM DIMENSIONS IN METRIC DO NOT SCALE DRAWING

EDP NO. SEE SHEET 2 OF 2
ENG. NO. SD-5558****
SHEET 1 OF 2

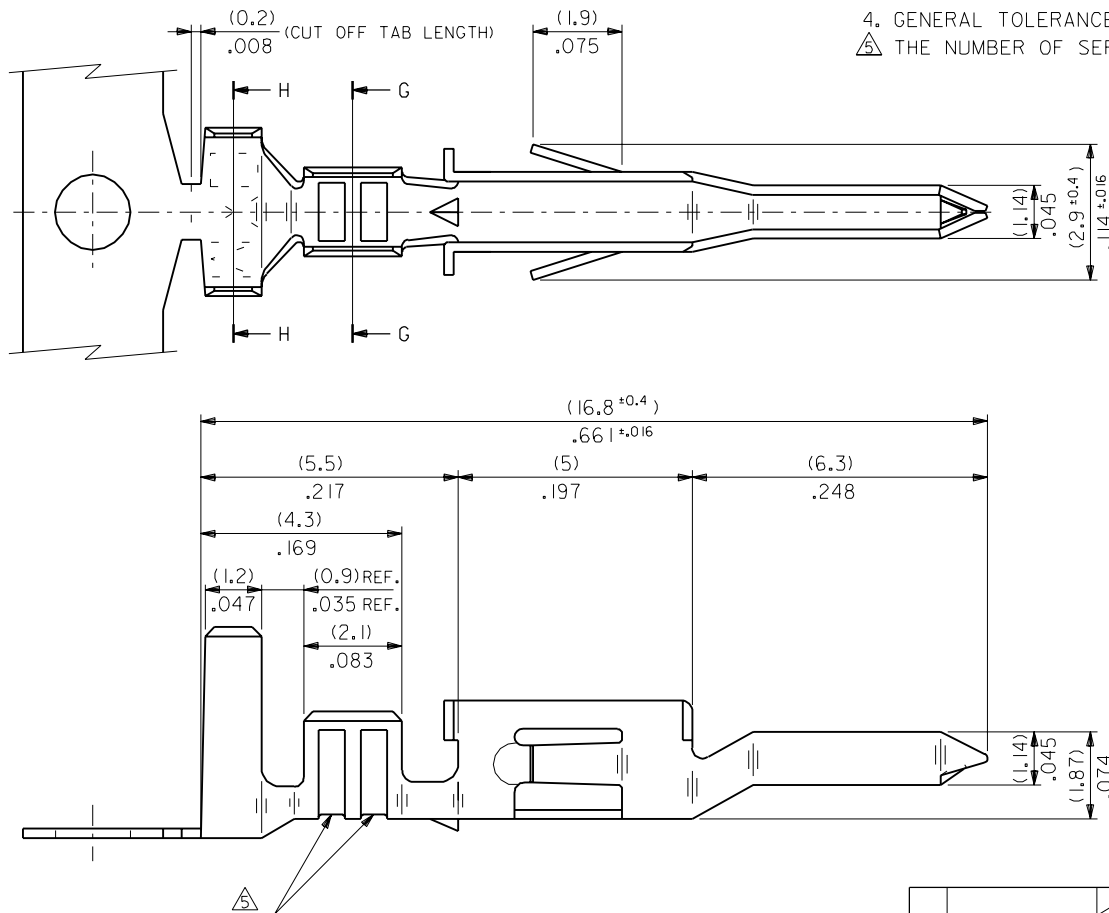

NOTES

1. APPLICABLE HOUSING : 5559 SERIES
2. MATES WITH TERMINAL : 5556 SERIES
3. (METRIC) VALUES SHOWN GOVERN OVER ENGLISH CONVERSION VALUES.
4. GENERAL TOLERANCES OF ENGLISH CONVERSION VALUES : ±.008 INCH
5. THE NUMBER OF SERRATIONS TO BE ONE FOR WIRE RANGE #22-28.

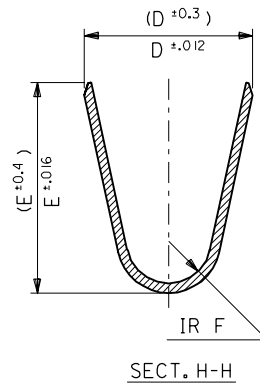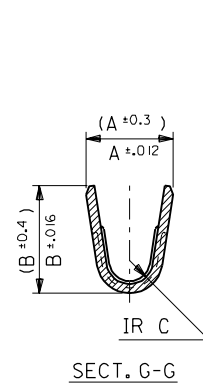

					材料 MATERIAL	SEE SHEET 2 OF 2	MOLEX-JAPAN CO.,LTD. 日本モレックス株式会社	
		K	REVISED (JC90012)	Y.K. S.K.	'98/1/6	仕上げ FINISH	SEE SHEET 2 OF 2	EDP. NO.
		J	REVISED (JC80619)	Y.K. S.K.	'98/5/6	適用電線範囲 WIRE RANGE	SEE SHEET 2 OF 2	SEE SHEET 2 OF 2
角度 ANGLE	+3°	H	REVISED (J20428)	H.H. Y.Y.	'92/5/20	被覆外径 INS. RANGE	SEE SHEET 2 OF 2	ENG. NO.
30 以上 OVER	+0.3	G	REVISED (J10381)	H.H. Y.Y.	'91/6/25	DRAWN BY '91/3/2 H.HIRAMOTO	CHK'D BY '98/7/7 K.T. S.KUNISHI	SHEET 1 OF 2
10 以上 30 未満 OVER UNDER	+0.25	F	REVISED & REDRAWN (J10202)	H.H. Y.Y.	'91/4/27	APP'D BY '98/7/7 M.FUKUSHIMA	尺度 SCALE 10 - 1	REV K
10 未満 UNDER	+0.2	記号 LTR	変更内容 REVISION RECORD	DR. CHK.	DATE	TITLE 名称		
一般公差 GENERAL TOLERANCES		REVISE ONLY ON CAD SYSTEM				NEW MINI. FIT CONN. CRIMP PIN		

— DIMENSIONS IN METRIC DO NOT SCALE DRAWING

TIN PLATED PHOSPHOR BRONZE	(0.9) .035	(4.5) .177	(3.6) .142	(0.6) .024	(2.7) .106	(2.3) .091	Ø (3.1) .122 MAX.	# 16	39-00-0084	5558 PBT3L	LOOSE
									↑ -0083	↑ PBT3	CHAIN
	(0.6) .024	(2.3) .091	(2.3) .091	(0.4) .016	(1.65) .065	(1.8) .071	Ø (0.9-1.8) .035-.071	#22-28	-0068	PBT2L	LOOSE
									-0067	PBT2	CHAIN
	(0.9) .035	(4.5) .177	(3.6) .142	(0.5) .020	(2.3) .091	(1.9) .075	Ø (1.3-3.1) .051-.122	# 18-24	-0062	PBTL	LOOSE
									-0061	PBT	CHAIN
TIN OVER COPPER PLATED BRASS	(0.9) .035	(4.5) .177	(3.6) .142	(0.6) .024	(2.7) .106	(2.3) .091	Ø (3.1) .122 MAX.	# 16	-0082	T3L	LOOSE
									-0081	T3	CHAIN
	(0.6) .024	(2.3) .091	(2.3) .091	(0.4) .016	(1.65) .065	(1.8) .071	Ø (0.9-1.8) .035-.071	#22-28	-0049	T2L	LOOSE
									-0048	T2	CHAIN
	(0.9) .035	(4.5) .177	(3.6) .142	(0.5) .020	(2.3) .091	(1.9) .075	Ø (1.3-3.1) .051-.122	# 18-24	↓ -0041	↓ TL	LOOSE
									39-00-0040	5558 T	CHAIN
MATERIAL	F	E	D	C	B	A	INS. RANGE	WIRE RANGE	EDP NO.	ENG. NO.	FORM

						材料 MATERIAL		SEE CHART		 MOLEX-JAPAN CO.,LTD. 日本モレックス株式会社	
						THICKNESS : (0.203) / .008					
		K	SEE SHEET 1 OF 2	Y.K. S.K.	98/1/6	仕上げ FINISH		SEE CHART		EDP. NO.	
		J	SEE SHEET 1 OF 2	Y.K. S.K.	98/5/6					SEE CHART	
角度 ANGLE	+3°	H	SEE SHEET 1 OF 2	H.H. Y.Y.	92/5/20	適用電線範囲 WIRE RANGE		SEE CHART		ENG. NO.	
30 以上 OVER	+0.3	G	SEE SHEET 1 OF 2	H.H. Y.Y.	9/6/25	被覆外径 INS. RANGE		SEE CHART		SHEET 2 OF 2	
10 以上 30 未満 OVER 30 UNDER	+0.25	F	SEE SHEET 1 OF 2	H.H. Y.Y.	9/1/21					REV K	
10 未満 UNDER	+0.2	記号 LTR	変更内容 REVISION RECORD	DR. CHK.	日付 DATE	DRAWN BY 9/13/2 H.HIRAMOTO		CHK'D BY 98/1/7 K.T. S.KUNISHI		TITLE 名称	
一般公差 GENERAL TOLERANCES		REVISION ONLY ON CAD SYSTEM				APPD BY 98/1/7 M.FUKUSHIMA		尺度 SCALE 10 - 1		NEW MINI. FIT CONN. CRIMP PIN	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX(JAPAN) AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
本図面は日本モレックス(株)の所有する情報を含むもので 当社の許可なく複製を禁止する。