
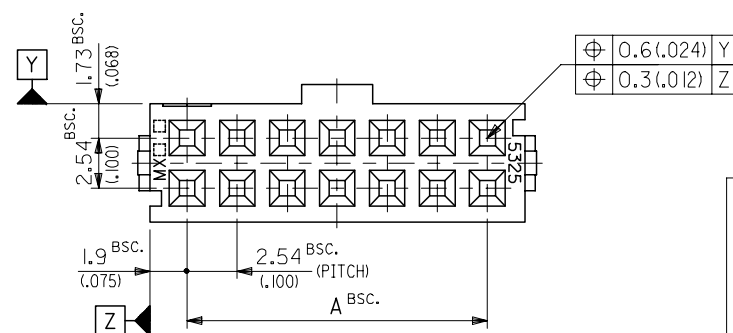

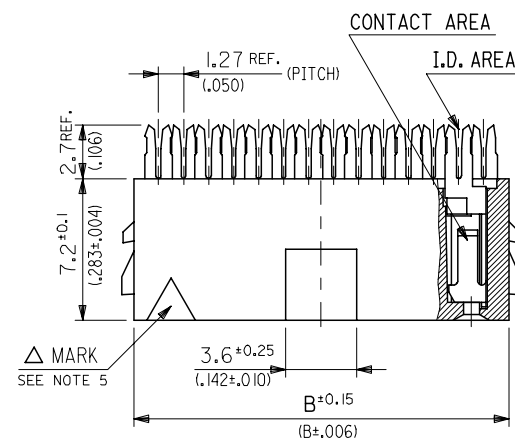
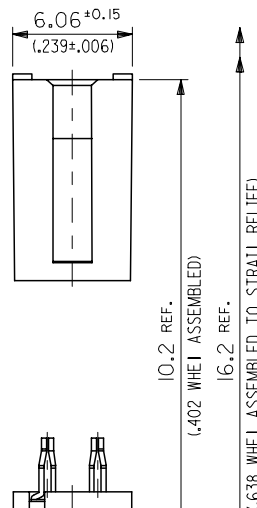


10	9	8	7	6	5	4	3	2	1					
1. 材料 ハウジング : ガラス繊維 15% 入り PBTP (UL94V-0), 黒色 ターミナル : リン青銅 MATERIAL HOUSING : PBTP (15%G.F.), UL94V-0, BLACK TERMINAL : PHOS.BRO. 2. 適用電線 : 1.27ピッチリボンケーブル より線 : AWG#26 ~ #28 (芯線 7本構成) 単線 : AWG#28 FOR USE WITH AWG#26 & #28 STRANDED WIRE (CONSISTS OF 7 CONDUCTORS) AND #28 SOLID WIRE. 1.14 DIA. MAX. INSULATION RIBBON CABLE WITH 1.27 CENTERS. 3. 適合ストレーンリリーフ : 5328-N MATES WITH STRAIN RELIEF OF 5328 SERIES	4. 嵌合相手 : 5330,5332,5340,5342 シリーズ MATES WITH CONNECTOR SERIES OF 5330,5332,5340 & 5342 5. 使用符号の説明 LEGEND ベースナンバー BASE NUMBER 極数 CIRCUIT SIZE アッパハウジング分離タイプ UNLOADED UPPER HOUSING ターミナルのメッキコード PLATING CODE OF TERMINAL ハウジングの色 MATERIAL COLOR BLANK : BLACK GY : GRAY	△ トレードマーク : MX プラス 1 文字の製造工場を示すアルファベットにて構成 但し, "J" は JAPAN を示す。(例 MX J) キャビティ番号 : 1 桁の数字で表示 金型番号 : アルファベット 1 文字にて構成。 部品番号 : 5327 と表示 FORMED BY MX AND 1 MORE LETTER OF ALPHABET WHICH MEAN THE MANUFACTORY, BUT "J" MEANS JAPAN. (TO TRADE MARK) (e.g. MXJ) AND BY 1 DIGIT NUMBER (TO CAVITY NO.) AND BY 1 LETTER OF ALPHABET (TO MOLD NO.) PART NO. : INDICATE 5327	△ 部品番号 : 5325 と表示 その他は △ と同内容で記載 PART NO. : INDICATE 5325 INDICATE THE SAME △, OTHERWISE ENG.NO.											
39-53-5641	5320-64AGS37F-GY	39-53-5640	5320-64AGS27F-GY	39-53-4649	5320-64AGS17F-GY			39-53-3644	5320-64AGS37F	39-53-4647	5320-64AGS27F	39-53-4646	5320-64AGS17F	64
▲ -5601	▲ -60AGS37F-GY	▲ -5600	▲ -60AGS27F-GY	▲ -4609	▲ -60AGS17F-GY			▲ -3604	▲ -60AGS37F	▲ -4607	▲ -60AGS27F	▲ -4606	▲ -60AGS17F	60
	-5501		-50AGS37F-GY		-4509			-3504	-50AGS37F	-4507	-50AGS27F	-4506	-50AGS17F	50
								-3444	-44AGS37F			-4406	-40AGS17F	44
	-5401		-40AGS37F-GY		-4409			-3404	-40AGS37F	-4407	-40AGS27F	-4406	-40AGS17F	40
	-5341		-34AGS37F-GY		-4349		-4348	-3344	-34AGS37F	-4347	-34AGS27F	-4346	-34AGS17F	34
	-5301		-30AGS37F-GY		-4309			-3304	-30AGS37F	-4307	-30AGS27F	-4306	-30AGS17F	30
	-5261		-26AGS37F-GY		-4269		-4268	-3264	-26AGS37F	-4267	-26AGS27F	-4266	-26AGS17F	26
	-5201		-20AGS37F-GY		-4209			-3204	-20AGS37F	-4207	-20AGS27F	-4206	-20AGS17F	20
	-5161		-16AGS37F-GY		-4169		-4168	-3164	-16AGS37F	-4167	-16AGS27F	-4166	-16AGS17F	16
	-5141		-14AGS37F-GY		-4149		-4148	-3144	-14AGS37F	-4147	-14AGS27F	-4146	-14AGS17F	14
▼	▼	▼	▼	▼	▼			▼	▼	▼	▼	▼	▼	12
39-53-5101	5320-10AGS37F-GY	39-53-5100	5320-10AGS27F-GY	39-53-4109	5320-10AGS17F-GY			39-53-3104	5320-10AGS37F	39-53-4107	5320-10AGS27F	39-53-4106	5320-10AGS17F	10
EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	-NG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	NO. OF CKTS.
5320-NAGS37F-GY	-LEAD FREE-	5320-NAGS27F-GY	-LEAD FREE-	5320-NAGS17F-GY	-LEAD FREE-	5320-NAGS47F	-LEAD FREE-	5320-NAGS37F	-LEAD FREE-	5320-NAGS27F	-LEAD FREE-	5320-NAGS17F	-LEAD FREE-	
39-51-7647	5320-64AGS3-GY	39-51-7646	5320-64AGS2-GY	39-51-7645	5320-64AGS1-GY			39-51-2642	5320-64AGS3	39-51-2641	5320-64AGS2	39-51-2640	5320-64AGS1	64
▲ -7607	▲ -60AGS3-GY	▲ -7606	▲ -60AGS2-GY	▲ -7605	▲ -60AGS1-GY			▲ -2602	▲ -60AGS3	▲ -2601	▲ -60AGS2	▲ -2600	▲ -60AGS1	60
	-7507		-50AGS3-GY		-7506			-2502	-50AGS3	-2501	-50AGS2	-2500	-50AGS1	50
								-2442	-44AGS3					44
	-7407		-40AGS3-GY		-7406		-7405	-2402	-40AGS3	-2401	-40AGS2	-2400	-40AGS1	40
	-7347		-34AGS3-GY		-7346		-7345	-2342	-34AGS3	-2341	-34AGS2	-2340	-34AGS1	34
	-7307		-30AGS3-GY		-7306		-7305	-2302	-30AGS3	-2301	-30AGS2	-2300	-30AGS1	30
	-7267		-26AGS3-GY		-7266		-7265	-2262	-26AGS3	-2261	-26AGS2	-2260	-26AGS1	26
	-7207		-20AGS3-GY		-7206		-7205	-2202	-20AGS3	-2201	-20AGS2	-2200	-20AGS1	20
	-7167		-16AGS3-GY		-7166		-7165	▼ -8169	▼ -16AGS3	▼ -2161	▼ -16AGS2	▼ -2160	▼ -16AGS1	16
	-7147		-14AGS3-GY		-7146		-7145	▼ -8149	▼ -14AGS3	▼ -2141	▼ -14AGS2	▼ -2140	▼ -14AGS1	14
▼	▼	▼	▼	▼	▼			▼	▼	▼	▼	▼	▼	12
39-51-7107	5320-10AGS3-GY	39-51-7106	5320-10AGS2-GY	39-51-7105	5320-10AGS1-GY			39-51-2102	5320-10AGS3	39-51-2101	5320-10AGS2	39-51-2100	5320-10AGS1	10
EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	NO. OF CKTS.
5320-NAGS3-GY		5320-NAGS2-GY		5320-NAGS1-GY		5320-NAGS4		5320-NAGS3		5320-NAGS2		5320-NAGS1		
														64
						39-51-0605	5320-60AG3	15-29-3602	5320-60AG2	15-29-3601	5320-60AG1			60
39-52-1504	5320-50AT2	▲ -0505	▲ -50AG3	▲ -3502	▲ -50AG2	▲ -3501	▲ -50AG1							50
▲ -1404	▲ -40AT2	-0405	-40AG3	-3402	-40AG2	-3401	-40AG1							44
-1344	-34AT2	-0345	-34AG3	-3342	-34AG2	-3341	-34AG1							40
-1304	-30AT2					-3301	-30AG1							34
-1264	-26AT2	-0265	-26AG3	-3262	-26AG2	-3261	-26AG1							30
-1204	-20AT2	-0205	-20AG3	-3202	-20AG2	-3201	-20AG1							26
-1164	-16AT2	-0165	-16AG3	-3162	-16AG2	-3161	-16AG1							20
-1144	-14AT2	-0145	-14AG3	-3142	-14AG2	-3141	-14AG1							16
▼ -1124	▼ -12AT2	▼	▼	▼	▼	▼	▼							14
39-52-1104	5320-10AT2	39-51-0105	5320-10AG3	15-29-3102	5320-10AG2	15-29-3101	5320-10AG1							12
EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.							10
5320-NAT2	-LEAD FREE-	5320-NAG3		5320-NAG2		5320-NAG1								10
														10
														10
														10
														10
														10
														10
														10
														10
														10
														10
														10
														10
														10
														10
														10
														10
														10
														10
														10
														10
														10
														10
														10
														10
														10
														10
														10
														10
														10
														10
														10
														10
														10
														10
														10
														10
														10
														10

10 9 8 7 6 5 4 3 2 1

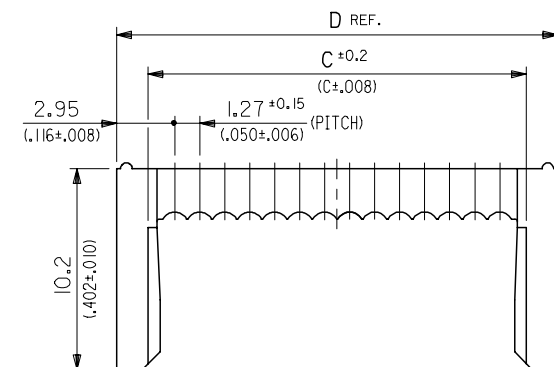

NOTES

- MATERIAL
HOUSING : G.F. 15% PBTP (UL94V-0)
TERMINAL : PHOSPHOR BRONZE
- FOR USE WITH AWG#26 & #28 STRANDED WIRE (CONSISTS OF 7 CONDUCTORS) AND #28 SOLID WIRE.
1.14(.045) DIA. MAX. INSULATION RIBBON CABLE WITH 1.27(.050) CENTERS.
- MATES WITH STRAIN RELIEF OF 5328 SERIES.
- MATES WITH CONNECTOR SERIES OF 5330,5332,5340,5342,5576 & 5578.
- LEGEND

5320 - N A * - *






BASE NUMBER _____ MATERIAL COLOR
CIRCUIT SIZE _____ BLANK : BLACK
UNLOADED UPPER HOUSING _____ GY : GREY
PLATING CODE OF TERMINAL _____

CODE : *	Δ MARK COLOR	CONTACT AREA PLATE	I. D. AREA PLATE	UNDER PLATE
GS1	YELLOW	GOLD 0.1μm(4μ") MIN.	TIN-LEAD 1 μm(39μ") MIN.	NICKEL 1 μm(39μ") MIN.
GS3	BLUE	GOLD 0.25μm(10μ") MIN.		
LEAD FREE GS17F	YELLOW	GOLD 0.1um(4u") MIN.	TIN 1 μm(39μ") MIN.	
LEAD FREE GS37F	BLUE	GOLD 0.25μm(10μ") MIN.		
LEAD FREE T2	BLACK	TIN 0.9μm(35μ") MIN. REFLOW (PRE-PLATED)	WITHOUT	WITHOUT

64	78.74 (3.100)	82.54 (3.250)	82.71 (3.256)	85.91 (3.382)
60	73.66 (2.900)	77.46 (3.050)	77.63 (3.056)	80.83 (3.182)
50	60.96 (2.400)	64.76 (2.550)	64.93 (2.556)	68.13 (2.682)
40	48.26 (1.900)	52.06 (2.050)	52.23 (2.056)	55.43 (2.182)
34	40.64 (1.600)	44.44 (1.750)	44.61 (1.756)	47.81 (1.882)
30	35.56 (1.400)	39.36 (1.550)	39.53 (1.556)	42.73 (1.682)
26	30.48 (1.200)	34.28 (1.350)	34.45 (1.356)	37.65 (1.482)
20	22.86 (.900)	26.66 (1.050)	26.83 (1.056)	30.03 (1.182)
16	17.78 (.700)	21.58 (.850)	21.75 (.856)	24.95 (.982)
14	15.24 (.600)	19.04 (.750)	19.21 (.756)	22.41 (.882)
12	12.70 (.500)	16.50 (.650)	16.67 (.656)	19.87 (.782)
10	10.16 (.400)	13.96 (.550)	14.13 (.556)	17.33 (.682)
NO. OF CKTS.	DIM. A	DIM. B	DIM. C	DIM. D

REVISED EC NO: J2006-0712 DRAWN: YANAGI MOTO 2005/10/03 CHKD: MITSUKAWA 2005/10/06 APPR: NUKITA 2005/10/14	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± 0.2	DRAWN BY HIRAMOTO	DATE 1990/07/11	TITLE QIK FLECS FEMALE ASSY ENGLISH ONLY				
		10 OVER 30 UNDER	± 0.25	CHECKED BY MSASAO	DATE					
		30 OVER	± 0.3	APPROVED BY HIKESUGI	DATE	MOLEX INCORPORATED				
		ANGULAR	± 3 °	MATERIAL NO.	DOCUMENT NO.					
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE SHEET 2 OF 2		SD-5320-002				
K	REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

[illegible]

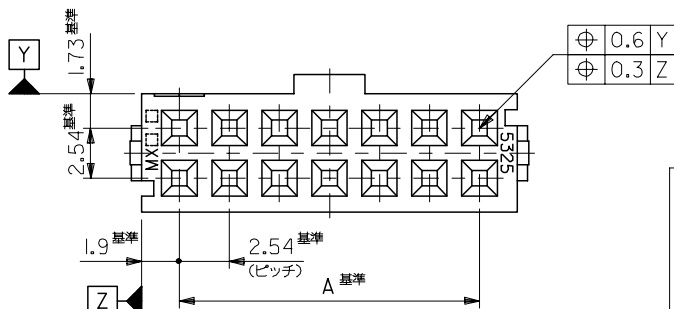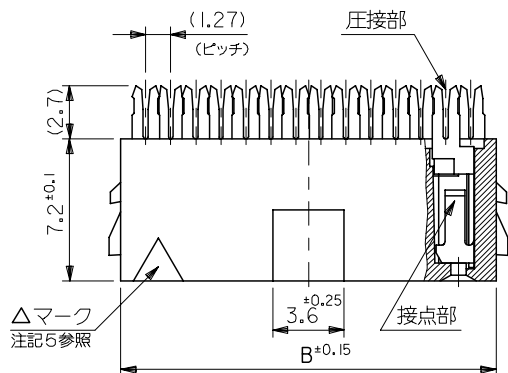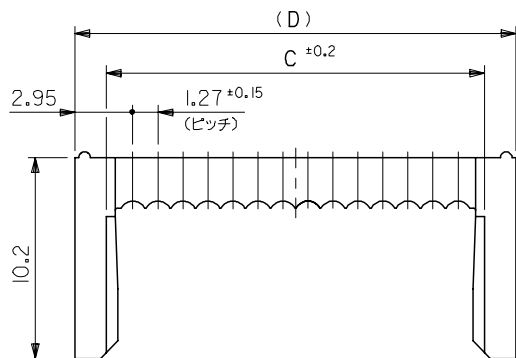

注記

- 材料 ハウジング : ガラス繊維 15% 入り PBTP (UL94V-0), 黒色
ターミナル : リン青銅
- 適用電線 : 1.27 ピッチリボンケーブル 被覆外径 : $\phi 1.14$ MAX.
より線 : AWG#26 ~ #28 (芯線 7 本構成)
単線 : AWG#28
- 適合ストレイニリリーフ : 5328-N
- 嵌合相手 : 5330, 5332, 5340, 5342 シリーズ
- 使用符号の説明
ベースナンバー _____ 5320 - N A *
極数 _____
アッパーハウジング分離タイプ _____
ターミナルのメッキコード _____

コード:*	△マークの色	接点部メッキ	圧接部メッキ	下地メッキ
GS1	黄	金 $0.1\mu\text{m}$ MIN.	半田 $1\mu\text{m}$ MIN.	ニッケル
GS3	青	金 $0.25\mu\text{m}$ MIN.		$1\mu\text{m}$ MIN.
LEAD FREE GS17F	黄	金 $0.1\mu\text{m}$ MIN.	錫 $1\mu\text{m}$ MIN.	
LEAD FREE GS37F	青	金 $0.25\mu\text{m}$ MIN.		
LEAD FREE T2	黒	錫 $0.9\mu\text{m}$ MIN. リフロー処理 (前メッキ)		

60	73.66	77.46	77.63	80.83
50	60.96	64.76	64.93	68.13
40	48.26	52.06	52.23	55.43
34	40.64	44.44	44.61	47.81
30	35.56	39.36	39.53	42.73
26	30.48	34.28	34.45	37.65
20	22.86	26.66	26.83	30.03
16	17.78	21.58	21.75	24.95
14	15.24	19.04	19.21	22.41
10	10.16	13.96	14.13	17.33
極数	A 寸法	B 寸法	C 寸法	D 寸法

REVISED EC NO: J2006-0712 DRWN:YANAGIMOTO 2005/10/03 CHKD:MTANAKA 2005/10/06 APPR:NUKITA 2005/10/14	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
		10 UNDER	±0.2	DRAWN BY H. HIRAMOTO	DATE 1990/07/10	TITLE QIK FLECS FEMALE ASSY			
		10 OVER 30 UNDER	±0.25	CHECKED BY M. SASAO	DATE				
		30 OVER	±0.3	APPROVED BY H. IKESUGI	DATE	 MOLEX INCORPORATED			
		ANGULAR ±3 °	MATERIAL NO. SEE SHEET 2 OF 2		DOCUMENT NO. SD-5320-007				
REV K		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

[illegible]