

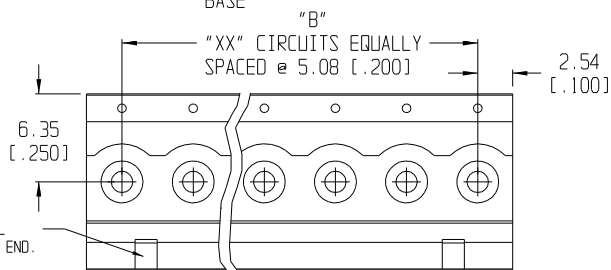
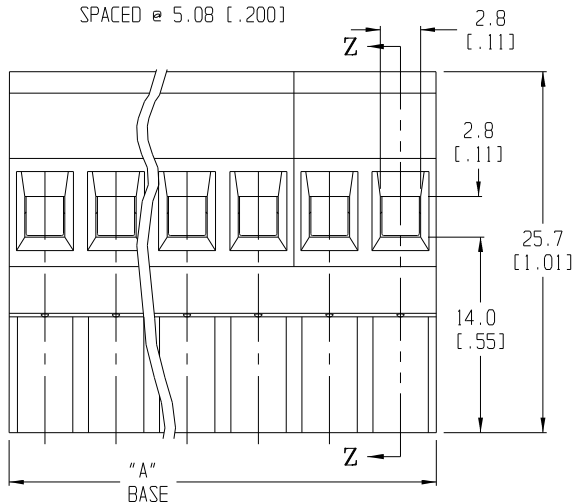
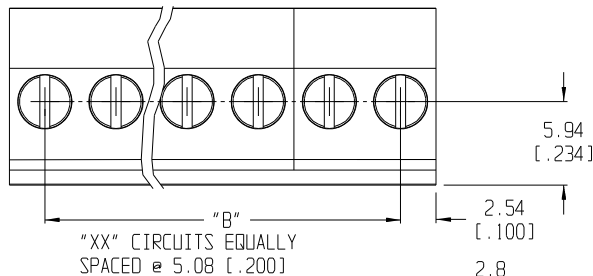



SD-39860-013

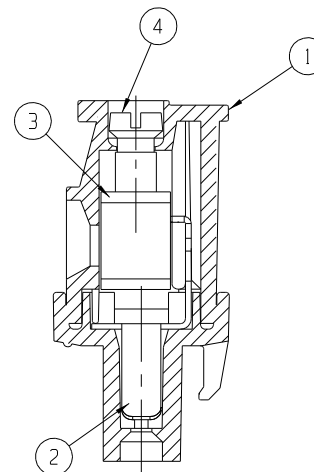


"RWE"
(REAR WIRE ENTRANCE)

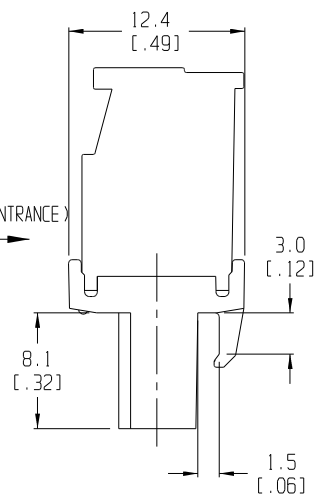

SECT "Z-Z"



SCALE 2:1



SCALE 2:1

NOTES:

1. MATERIAL: SEE TABLE
2. FINISHES: SEE TABLE
3. PRODUCT SPECIFICATION: NOT REQUIRED
4. PACKAGING: NOT REQUIRED
5. MATES WITH: NONE
6. "XX" REFERS TO THE QUANTITY OF CIRCUIT POSITIONS.
7. REFER TO DWG SD-38120-004 FOR OPTIONAL IMPRINTING (-10AV AND -11AV).

ECN 3656
CY 05-05-04
REV B

DESCRIPTION
MAJOR
CRITICAL
SPEC

GENERAL TOLERANCES:
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±.0015	±.0015
3 PLACES	±.038	±.005
2 PLACES	±.13	±.01
1 PLACE	±.3	
ANGULAR:	±2°	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

SCALE 3:1
DESIGN UNITS
☐ mm ☒ INCH
DRAWN BY & DATE
R. KEMP 12-06-01
CHECKED BY & DATE
P. WALTZ 12-06-01
APPROVED BY & DATE
L. ROTHBAUS 12-06-01
CAD FILENAME
8608XX

THIRD ANGLE
PROJECTION
TITLE:
VERTICAL PLUGGABLE SR BTS
RWE ASSY, (5.08 [.200] CENTERS)
MOLEX INCORPORATED
MATERIAL NO.
SEE SHT. 2
DRAWING NO.
SD-39860-013
SHEET NO.
1 OF 2
SIZE
B

PROJECT NO. -	-	-
DIMENSIONS:	SHT	REV
☒ mm ☐ INCH	☐ mm ☐ INCH	REVISE ON CAD ONLY

4	XX	SCREW, M3 X 0.5	STEEL	ZN, CLEAR CHROMATE
3	XX	SCREW, M3 X 0.5 (-G30, -49 OPT)	PHOS. BRONZE	TIN PLATE
2	XX	CAGE CLAMP	BRASS	NICKEL PLATE
1	XX	TERMINAL	PHOS. BRONZE	HOT TIN DIP
		TERMINAL, (-G30 OPT)	PHOS. BRONZE	GOLD PLATE
1	1	INSULATOR	POLYAMIDE	SEE CHART ON SHT. 2
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

