

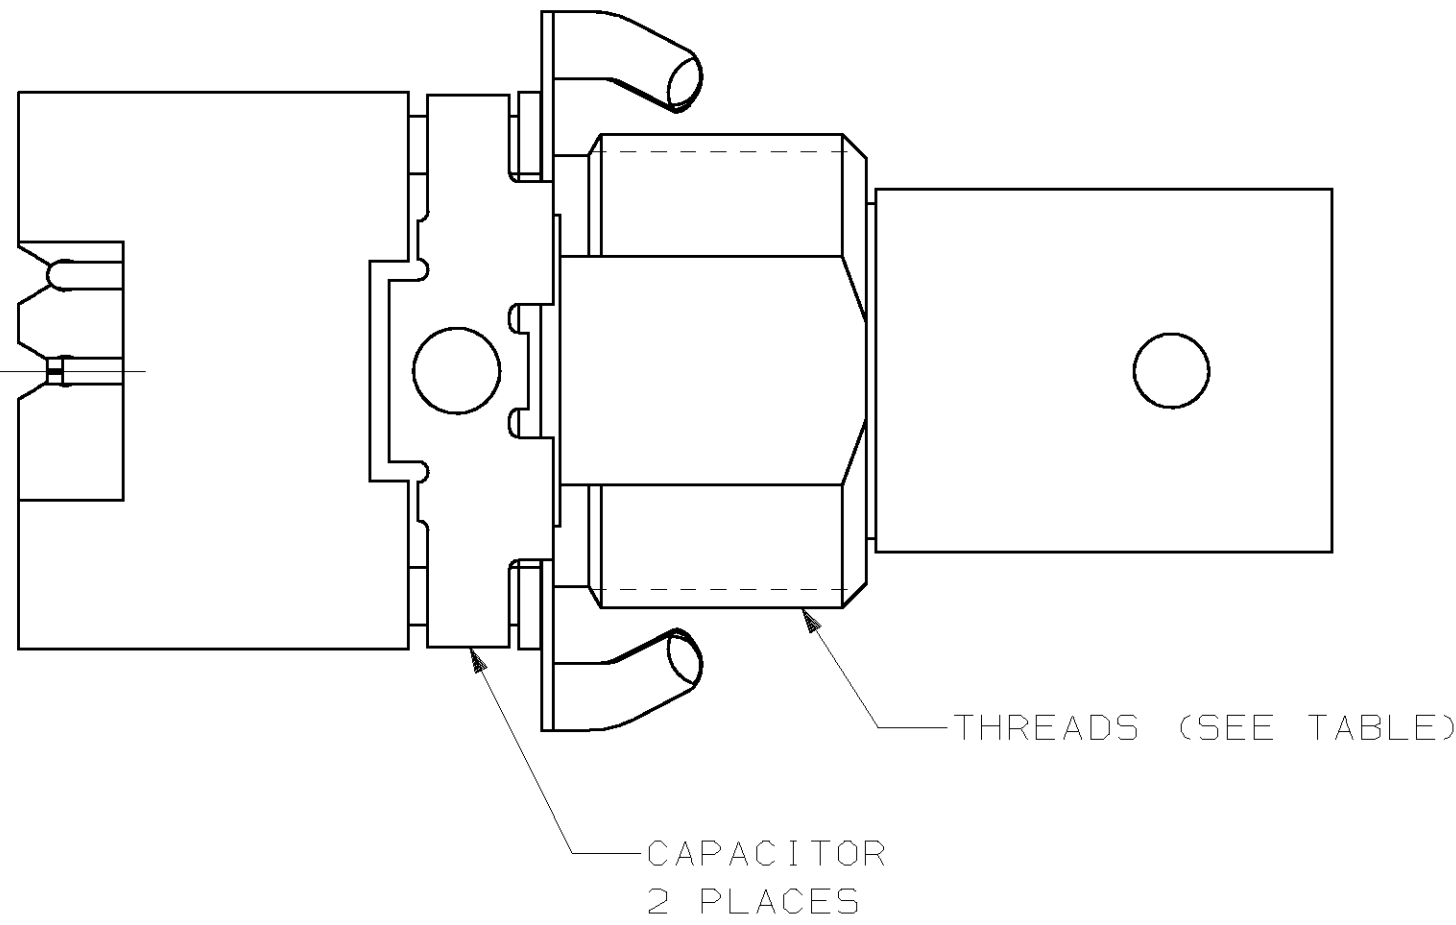
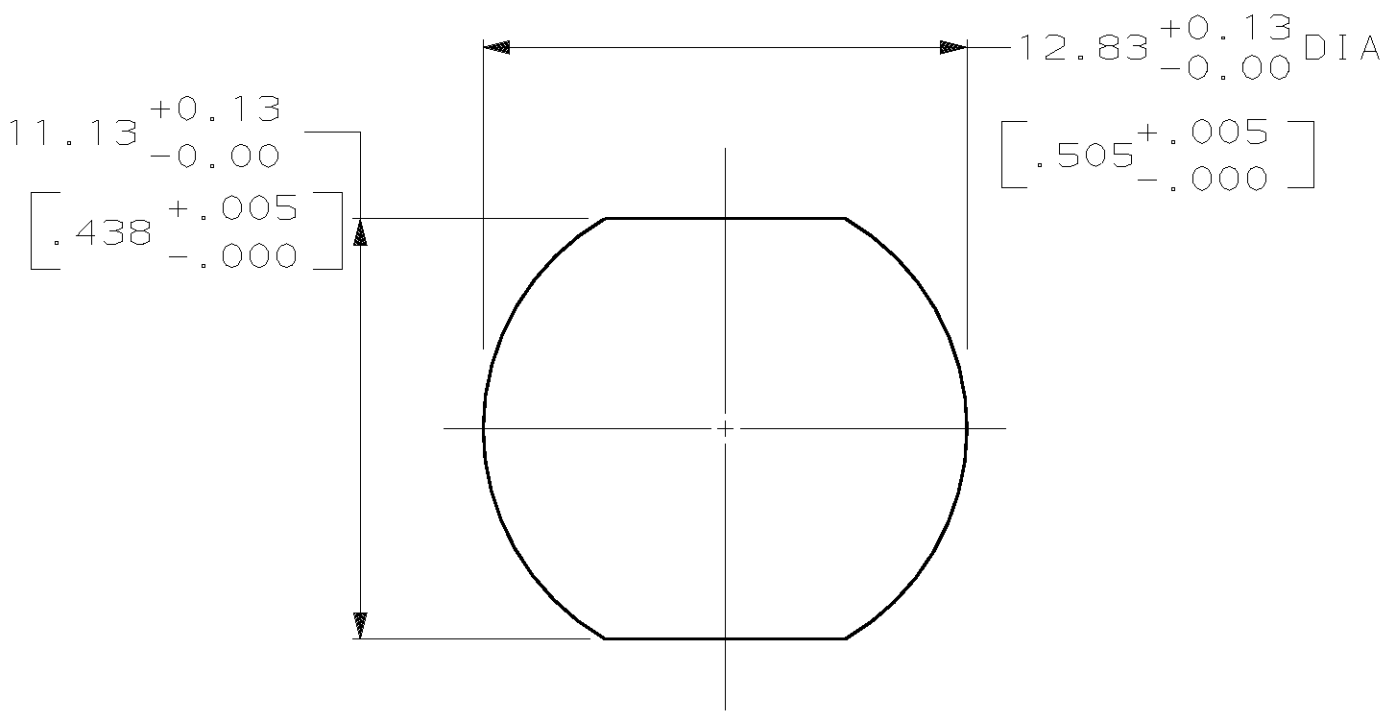
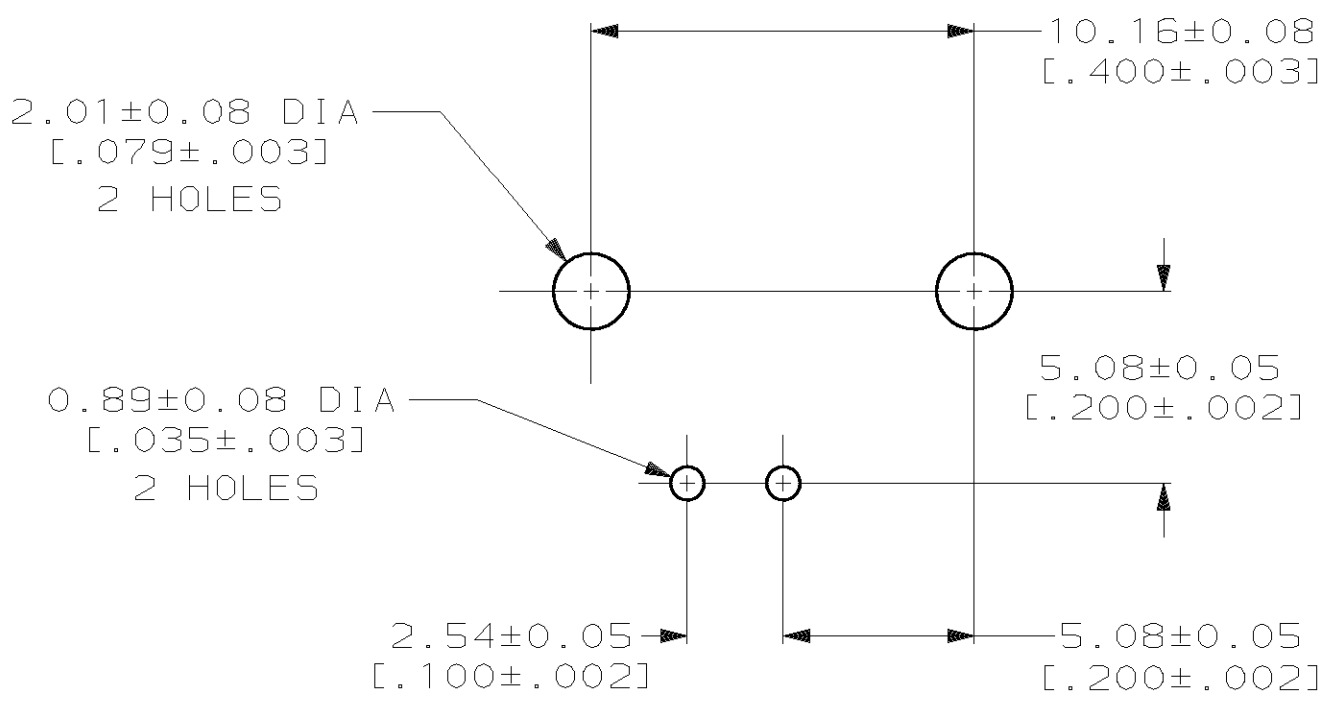
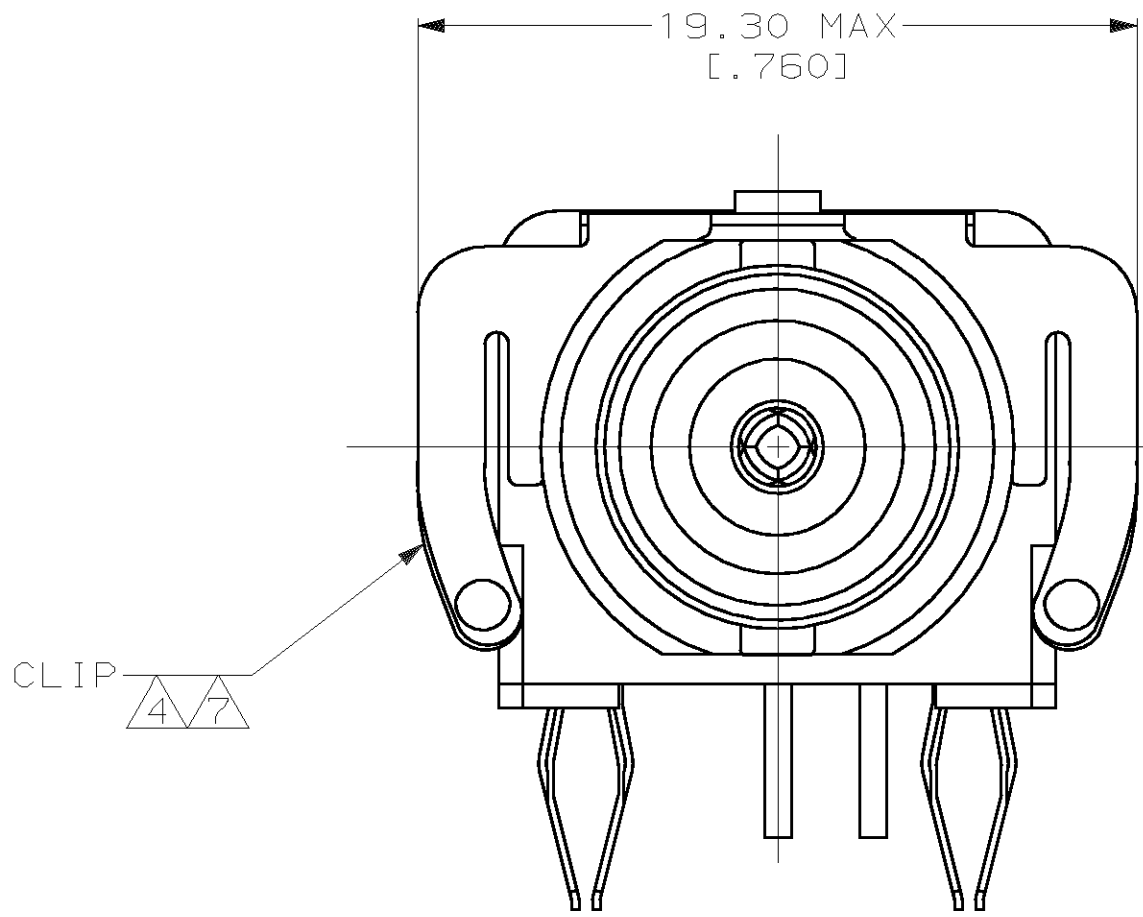


LOC		DIST		REVISIONS					
AJ	16	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD	
					H	SUPSD -1 PER 0E10-0110-99	11FEB00	M0	

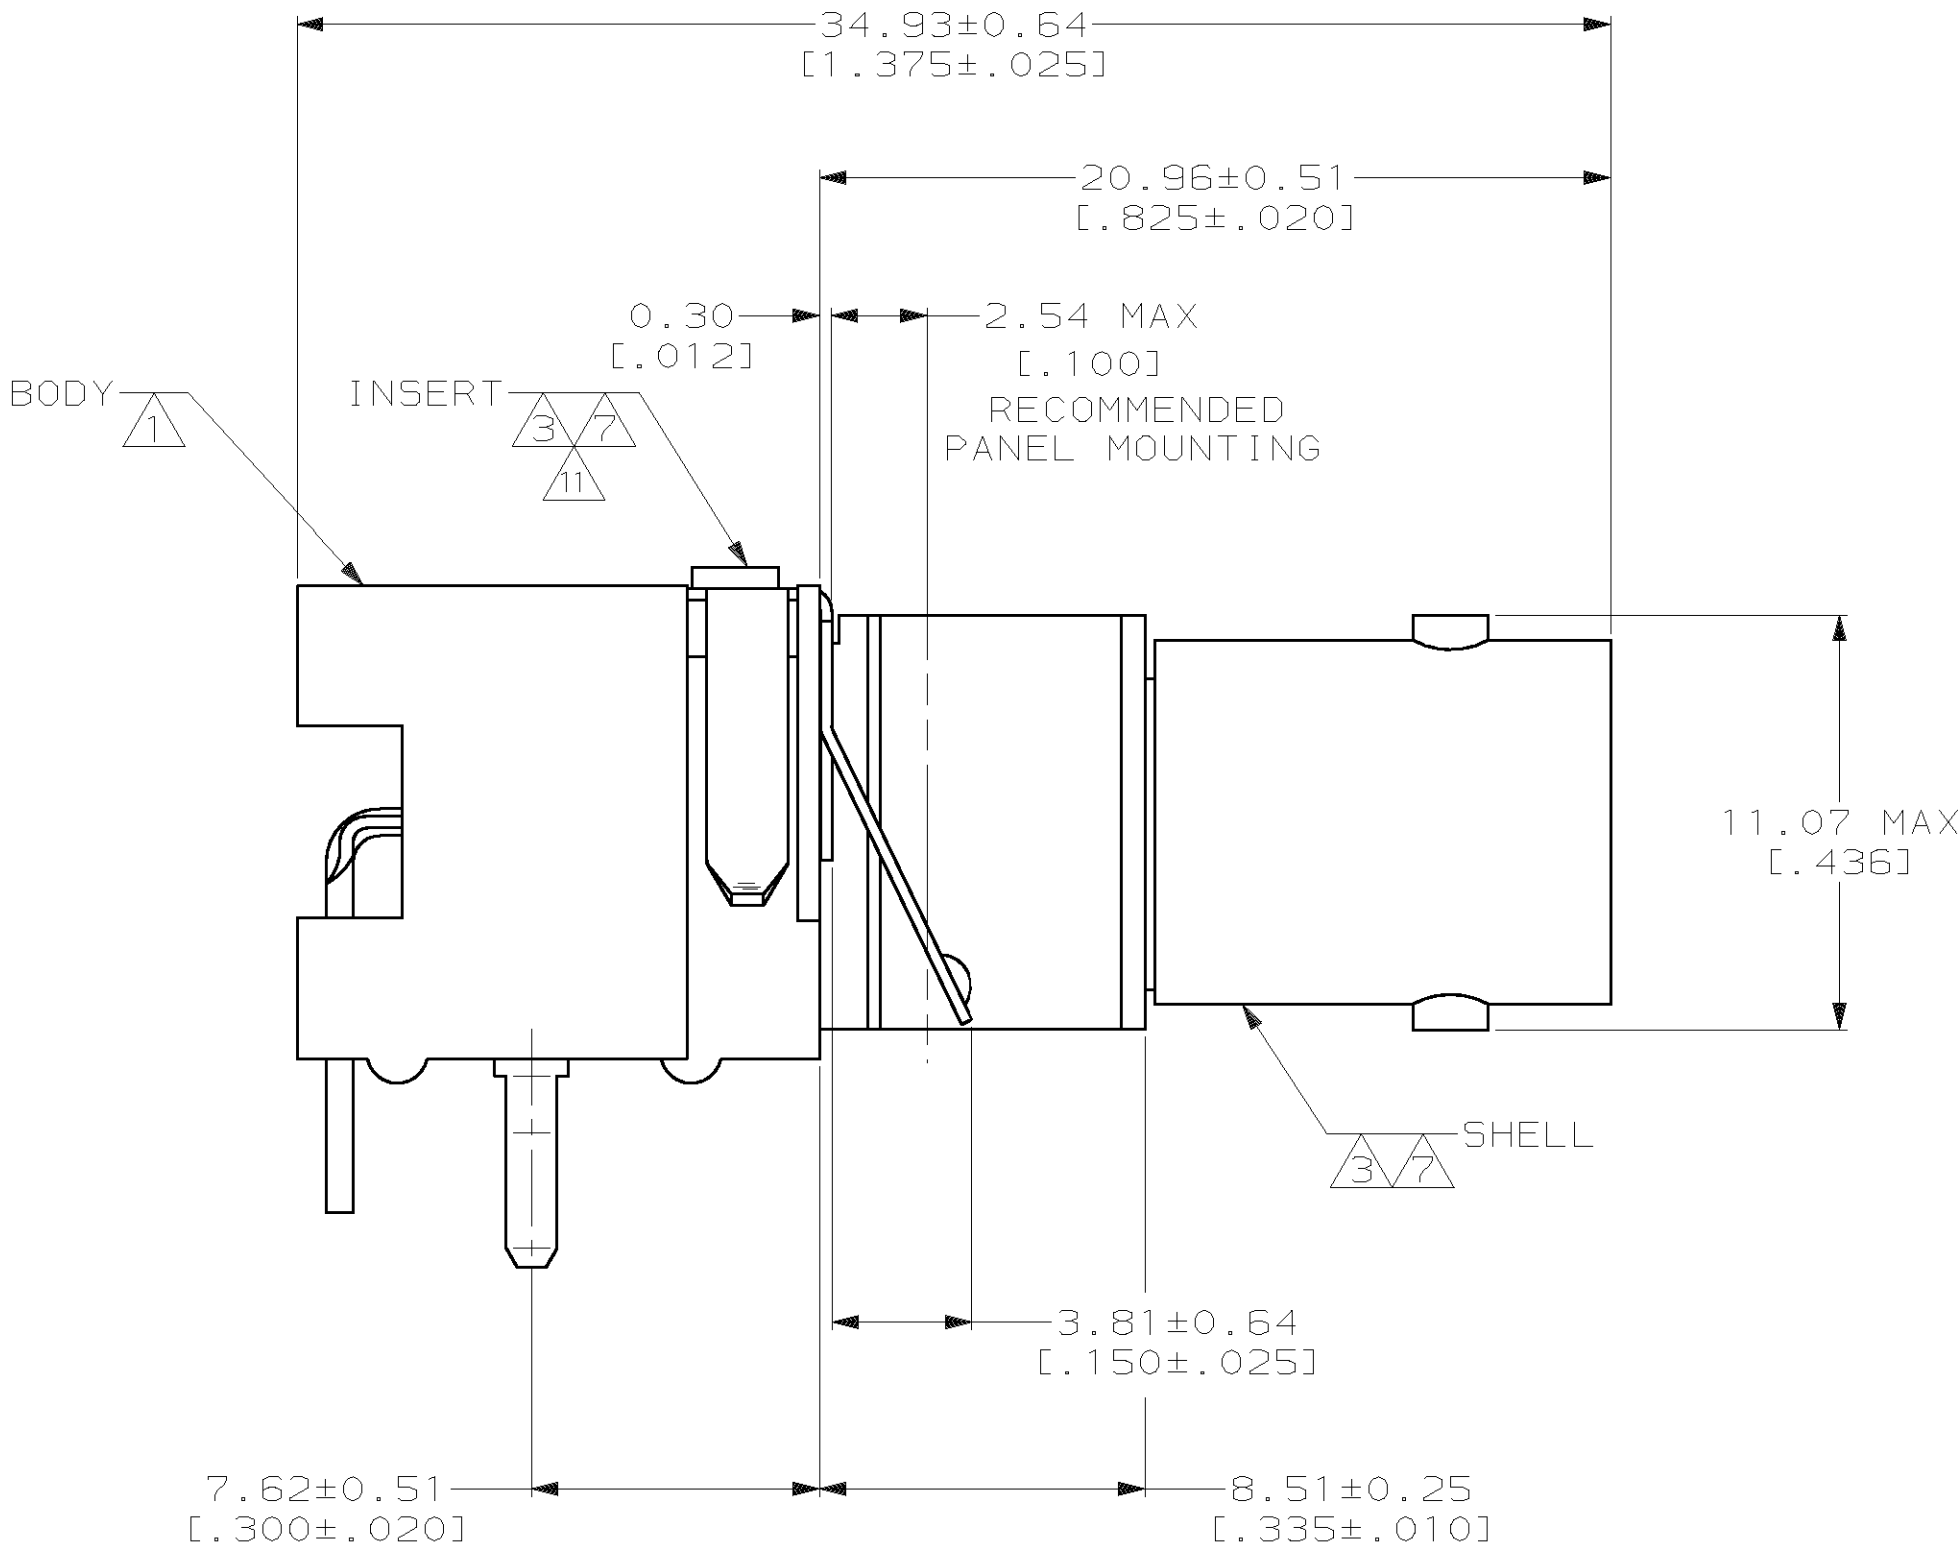

- 1 POLYESTER, PBT, BLACK, PER MIL-M-24519.
- 2 POLYMETHYLPENTENE GENERAL PURPOSE.
- 3 ZINC PER QQ-Z-363.
- 4 PHOSPHOR BRONZE PER QQ-B-750.
- 5 BRASS PER QQ-B-626.
- 6 BRASS PER ASTM-B-453.
- 7 NICKEL PL PER QQ-N-290.
- 8 TIN-LEAD PL PER MIL-P-81728.
- 9 TIN-LEAD PL PER ASTM-B-545.
- 10 SELECTIVELY GOLD PLATED ON INTERFACE AREA PER MIL-G-45204, 0.76 [.000030] THK, TIN-LEAD PLATED ON SOLDER TAIL PER MIL-P-81728, ALL OVER NICKEL PL PER QQ-N-290.
- 11 ESD DEVICE, VOLTAGE BREAKDOWN <3.5KVDC.
- 12 1/2-28 UNEF-2A

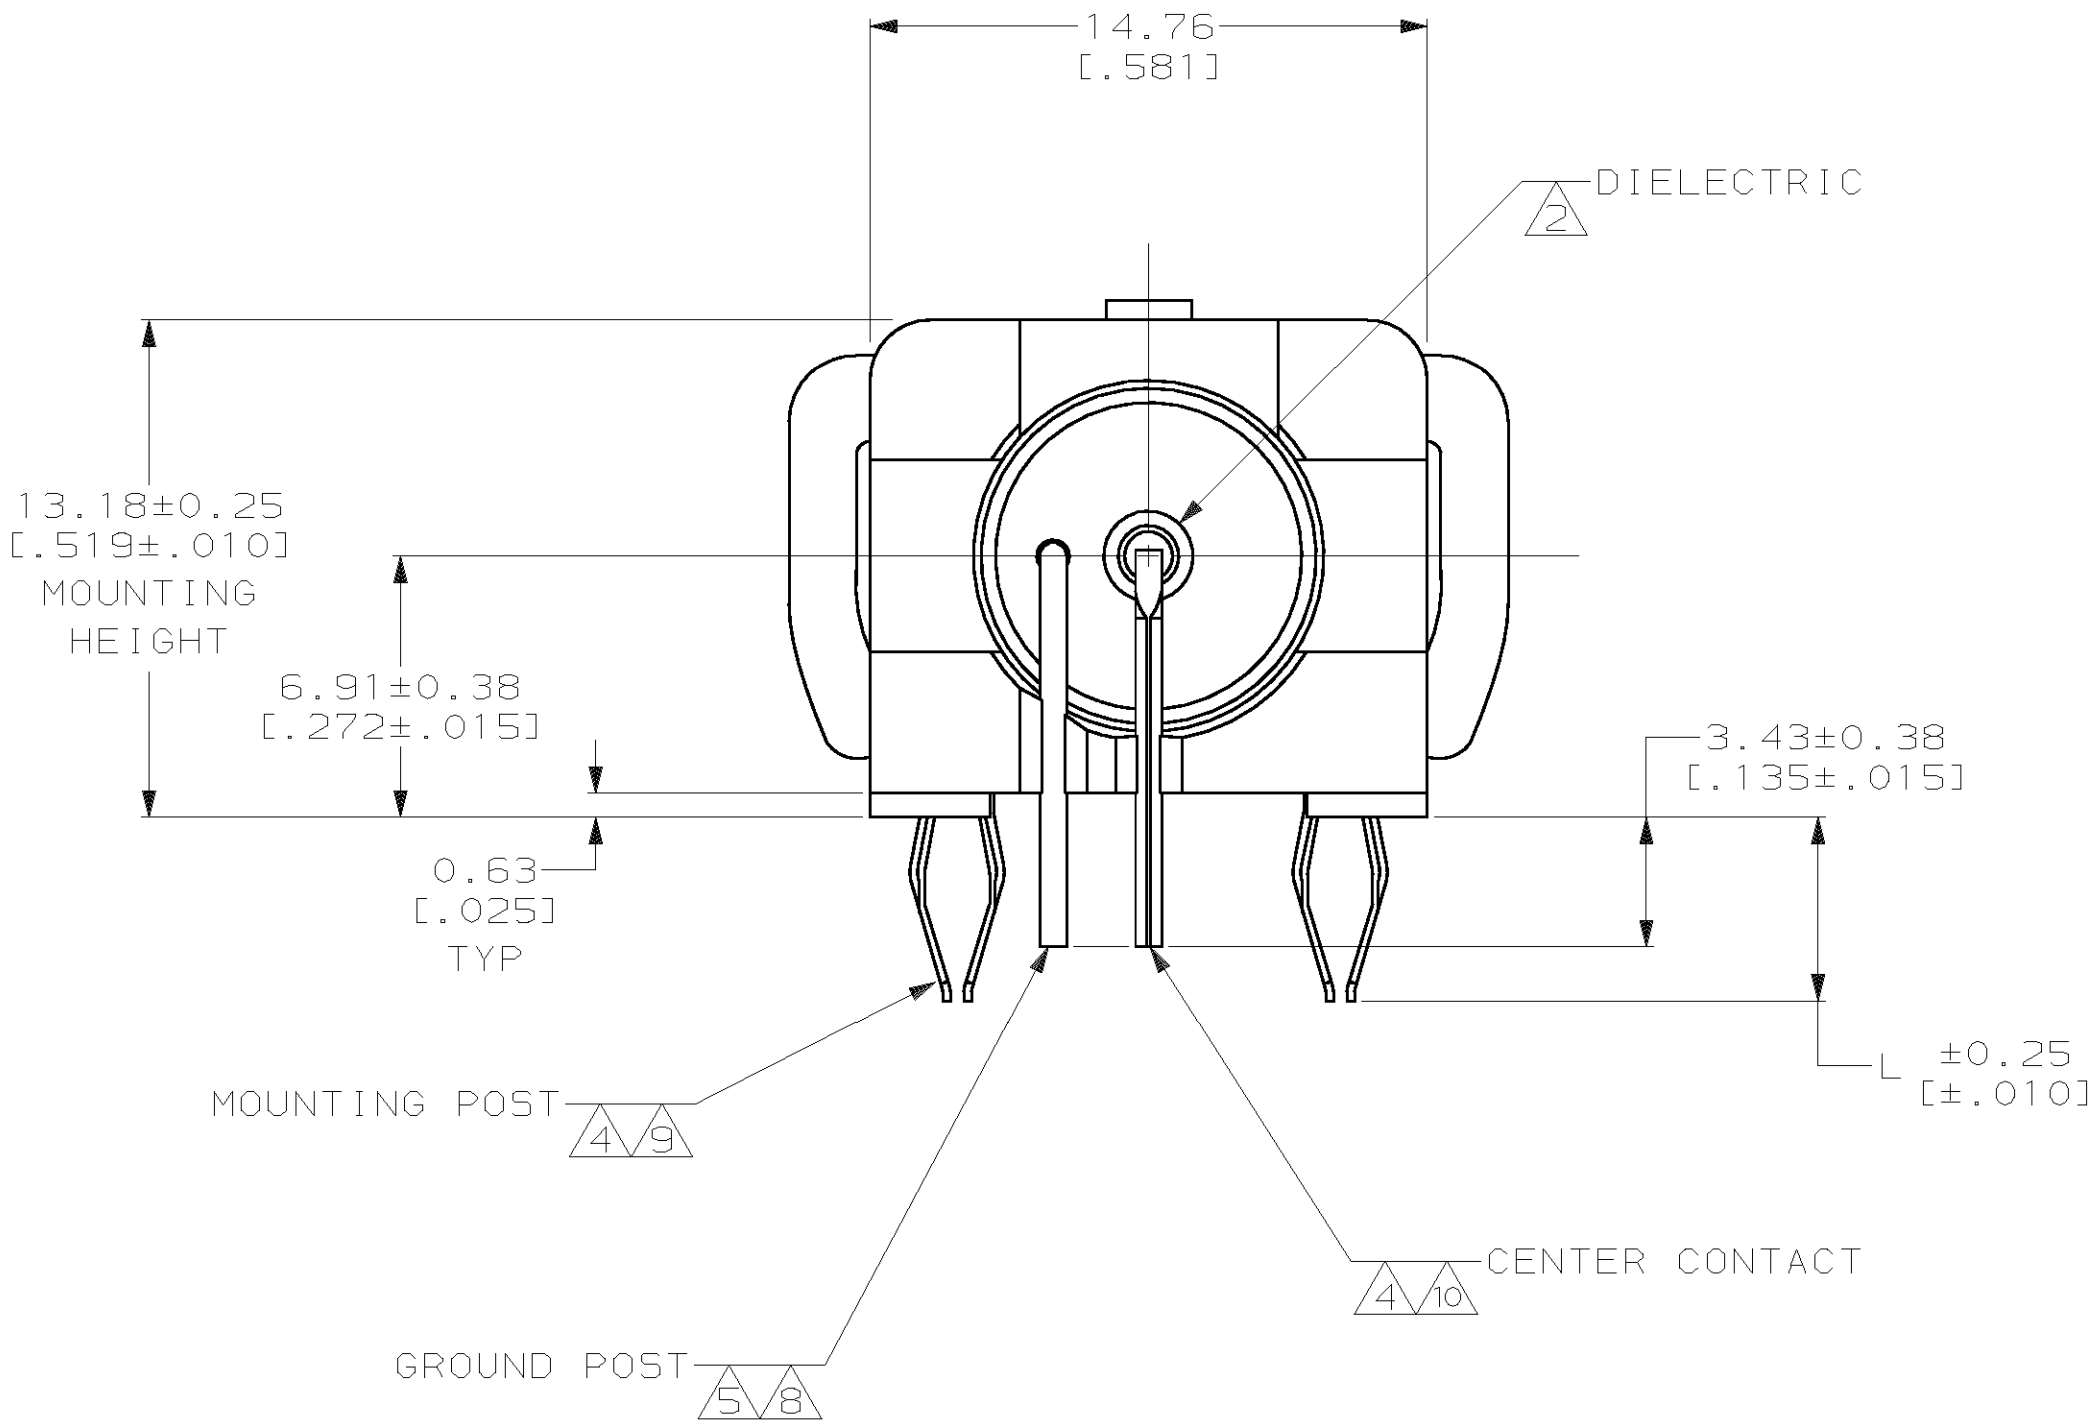

2.79 [.110]	12	7900 pf, 1500 VDC	414651-3
OB50LETE	-	7900 pf, 1500 VDC	414651-2
SUPSD BY 414651-3	4.70 [.185]	7900 pf, 1500 VDC	414651-1
L	THREADS	CAPACITANCE & VOLTAGE	PART NO
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± 0.20 [.008] 3 PLC DEC ± - ANGLES ± -		DR 7-15-94 J. LIPPERT	AMP Incorporated Harrisburg, PA 17105-3608
CHK 7-18-94 D. TAYLOR		APPD 7-18-94 D. TAYLOR	
APPD 7-18-94 J. LIPPERT		PRODUCT SPEC 108-1269	
SEE NOTES 1 THRU 6		APPLICATION SPEC -	NAME JACK, DECOUPLER, PCB RIGHT ANGLE, LOW PROFILE, ESD PROTECTED, BNC
FINISH SEE NOTES 7,8,9 & 10		WEIGHT -	SIZE D CAGE CODE 00779 DRAWING NO C-414651
			SCALE 5:1 SHEET 1 OF 1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.