

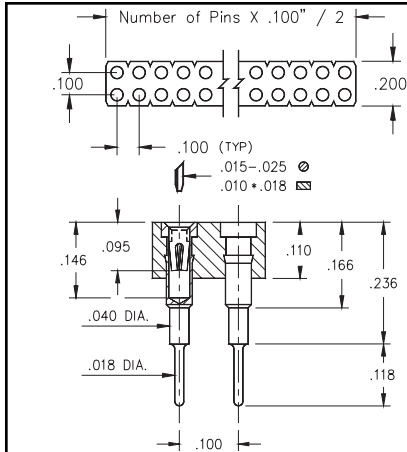


Fig. 1

- Elevated socket strips are available in 5 different standoff heights:
- 416...006 uses pin # 0153-1
- 416...003 uses pin # 0153-2
- 416...007 uses pin # 0153-3
- 416...008 uses pin # 0153-4
- 416...001 uses pin # 0153-5
- See page 136 for details.
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 208 for details.
- Insulators are high temp. thermoplastic.

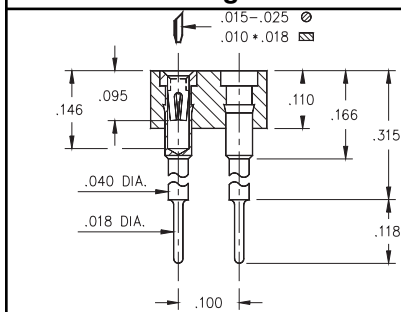
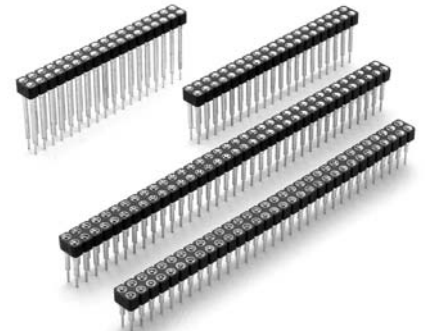


Fig. 2

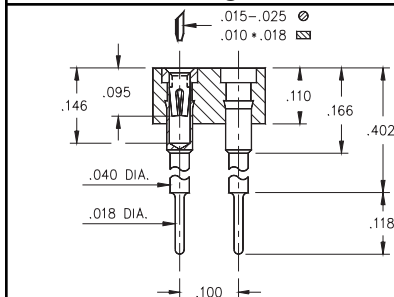


Fig. 3

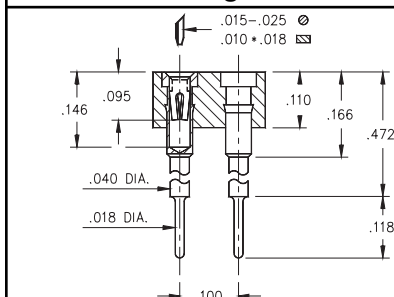


Fig. 4

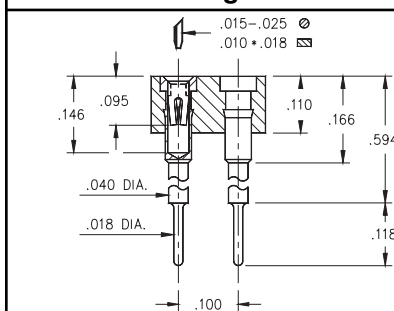


Fig. 5

Ordering Information

Fig. 1	Series 416...006 Standoff Height = .236"
	416-XX-2_ _-41-006000 Specify # of pins → 02-64
Fig. 2	Series 416...003 Standoff Height = .315"
	416-XX-2_ _-41-003000 Specify # of pins → 02-64
Fig. 3	Series 416...007 Standoff Height = .402"
	416-XX-2_ _-41-007000 Specify # of pins → 02-64
Fig. 4	Series 416...008 Standoff Height = .472"
	416-XX-2_ _-41-008000 Specify # of pins → 02-64
Fig. 5	Series 416...001 Standoff Height = .594"
	416-XX-2_ _-41-001000 Specify # of pins → 02-64



**XX=Plating Code
See Below**

**For RoHS compliance
select ◇ plating code.**

SPECIFY PLATING CODE XX=			93			43◇	
Sleeve (Pin)			200μ" Sn/Pb			200μ" Sn	
Contact (Clip)			30μ" Au			30μ" Au	